


Week 2

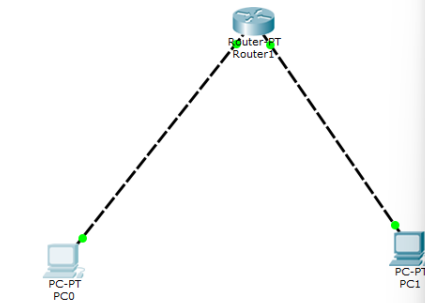

PC0

Physical Config Desktop Custom Interface

Command Prompt

```
Packet Tracer PC Command Line 1.0
PC>ping 20.0.0.2

Pinging 20.0.0.2 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Request timed out.


Ping statistics for 20.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

PC>ping 20.0.0.2

Pinging 20.0.0.2 with 32 bytes of data:
Request timed out.
Reply from 20.0.0.2: bytes=32 time=0ms TTL=127
Reply from 20.0.0.2: bytes=32 time=0ms TTL=127
Reply from 20.0.0.2: bytes=32 time=1ms TTL=127

Ping statistics for 20.0.0.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

PC>0
```

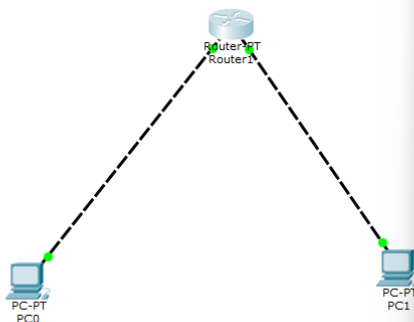

Router1

Physical Config CLI

IOS Command Line Interface

```
Router#enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fastethernet0/0
Router(config-if)#ip address 10.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
~Z
Router#
#SYS-5-CONFIG_I: Configured from console by console

Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fastethernet1/0
Router(config-if)#ip address 20.0.0.3 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up
```

Copy Paste

