


MACDRAIN® N 1750

DRAINAGE GEOCOMPOSITE

Geocomposite for planar drainage manufactured by thermobonding a drainage core - HDPE geonet made from two sets of parallel overlaid ribs integrally connected to each other in a rhomboidal shape (GNT) - with one nonwoven geotextile (GTX), working as a separation, filtration and protection layer.

	Standard	Unit	Value	Tolerance
External Filter (GTX)				
Structure: Needle punched and/or thermobonded nonwoven geotextile				
Raw Material: 100% UV stabilized polyolefin				
Mass per unit area	EN ISO 9864	g/m ²	130	average value
Tensile strength MD & CMD	EN ISO 10319	kN/m	8	average value
Flux perpendicular to the plane	EN ISO 11058	l/(m ² .s)	100	average value
Characteristic opening size O ₉₀	EN ISO 12956	micron	150	average value
Drainage Core (GNT)				
Structure: Sets of parallel ribs overlaid and integrally connected having a rhomboidal shape				
Raw Material: High density polyethylene, UV stabilized by carbon black, black colour				
Mass per unit area	EN ISO 9864	g/m ²	900	typical value
Width		cm	200 or 400	typical value
Geocomposite (GCO)				
Thickness at 2 kPa	EN 9863-1	mm	7.5	average value
Mass per unit area	EN ISO 9864	g/m ²	1030	average value
Static puncture resistance	EN ISO 12236	N	2000	average value
Tensile strength MD	EN ISO 10319	kN/m	16.0	average value
Strain at max load MD	EN ISO 10319	%	40	+/-20%
Tensile strength CMD	EN ISO 10319	kN/m	10.0	average value
In plane flow capacity MD	EN ISO 12958	l/(m.s)	l/(m.s)	average value
	gradient i =	1.0	1.0	
	type of contact	S/S	R/R	
	20 kPa	-	1.80	
	100 kPa	-	1.74	
	200 kPa	-	1.70	
	300 kPa	-	1.65	
Standard Dimensions of Geocomposite				
Roll width		m	2.0 or 4.0	typical value
Length		m	25 - 50	typical value
Filter overlay (one side)		mm	100	typical value

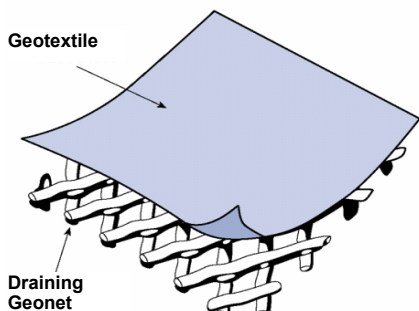

MD = longitudinal direction
 CMD = transversal direction
 S/S = contact type soft/soft
 R/R = contact type rigid/rigid

For the optimisation and improvement process of the technical characteristics of the products, the producer reserves the right to modify standards and characteristics of the product without warning. The information contained herein is to the best of our knowledge accurate, but since the circumstances and conditions in which it may be used are beyond our control, we do not accept any liability for any loss or damage, however arising, which results directly or indirectly from the use of such information nor do we offer any warranty or immunity against patent infringement. Specifiers are requested to check the validity of the specification they are using.

© Maccaferri Ltd. All rights reserved. Maccaferri will enforce Copyright.