


Mirafi® N-Series Nonwoven Polypropylene Geotextiles for Soil Separation and Drainage


Property / Test Method	Units	140NL	140NC	140N	160N	170N	180N	1100N	1120N	1160N
MECHANICAL PROPERTIES		Minimum Average Roll Value								
Grab Tensile Strength										
ASTM D4632										
Strength	lbs (N)	90 (401)	100 (445)	120 (534)	160 (712)	180 (801)	205 (912)	250 (1113)	300 (1335)	380 (1691)
Elongation	%	50	50	50	50	50	50	50	50	50
Trapezoid Tear Strength										
	lbs	40	45	50	60	75	80	100	115	140
ASTM D4533	(N)	(178)	(200)	(223)	(267)	(334)	(356)	(445)	(512)	(623)
CBR Puncture Strength										
	lbs	250	250	310	410	450	500	700	800	1025
ASTM D6241	(N)	(1113)	(1113)	(1380)	(1825)	(2003)	(2224)	(3115)	(3560)	(4561)
HYDRAULIC PROPERTIES										
Maximum Opening Size										
Apparent Opening Size (AOS)	US Sieve	50	70	70	70	70	80	100	100	100
ASTM D4751	(mm)	(0.30)	(0.212)	(0.212)	(0.212)	(0.212)	(0.18)	(0.15)	(0.15)	(0.15)
Minimum Roll Value										
Permittivity	sec ⁻¹	2.0	2.0	1.7	1.5	1.4	1.4	0.8	0.8	0.7
ASTM D4491										
Flow Rate	gal/min/ft ²	145	140	135	110	105	95	75	65	50
ASTM D4491	(l/min/m ²)	(5907)	(5704)	(5500)	(4481)	(4278)	(3870)	(3056)	(2648)	(2037)
Minimum Test Value										
UV Resistance after 500 hrs.	% strength	70	70	70	70	70	70	70	70	70
ASTM D4355										
Packaging	Units	140NL	140NC	140N	160N	170N	180N	1100N	1120N	1160N
Roll Width	ft (m)	12.5 (3.8)	12.5 (3.8)	12.5 (3.8)	12.5 (3.8)	12.5 (3.8)	12.5 (3.8)	15.0 (4.57)	15.0 (4.57)	15.0 (4.57)
Roll Length	ft (m)	360 (110)	360 (110)	360 (110)	300 (91.4)	300 (91.4)	360 (110)	300 (91.4)	300 (91.4)	150 (46)
					360 (110)	360 (110)	300 (91.4)			
Area	yd ² (m ²)	500 (418)	500 (418)	500 (418)	500 (418)	500 (418)	500 (418)	500 (418)	500 (418)	250 (209)
		600 (502)	600 (502)	600 (502)	600 (502)	600 (502)	600 (502)			

Note: Values and methods could change without notice


Mirafi® N-Series Nonwoven Geotextiles

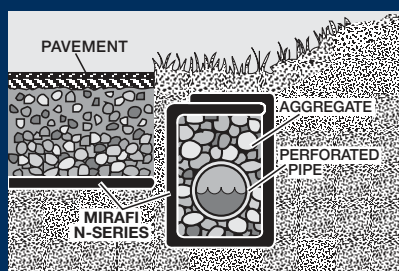

**Cut-off/Interceptor Drain Along a Roadway
Or Another Critical Structure**

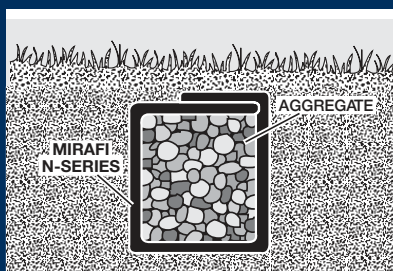

French Drain Without Pipe

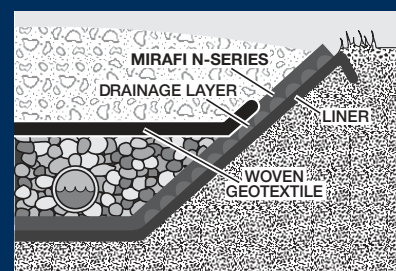

Liner Protection Within a Landfill

TenCate Geosynthetics Americas assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate Geosynthetics Americas disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Mirafi® is a registered trademark of Nicolon Corporation.

© 2016 Nicolon Corporation. All Rights Reserved.

PDS.N1217

365 South Holland Drive Tel 800 685 9990 Fax 706 693 4400
Pendergrass, GA 30567 Tel 706 693 2226 www.mirafi.com



ISO 9001 FM 61026

TENCATE
materials that make a difference