




US 350

Woven Filtration

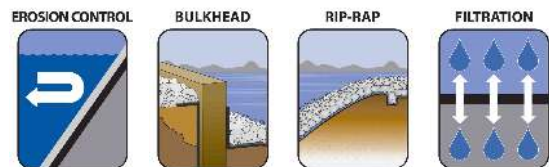

US 350 is a woven filtration geotextile made of high-tenacity polypropylene yarns. US 350 resists ultraviolet and biological deterioration, rotting, naturally encountered basics and acids. Polypropylene is stable within a pH range of 2 to 13. US 350 meets the following M.A.R.V. values:



PROPERTY	TEST METHOD	ENGLISH	METRIC
Grab Tensile Strength	ASTM D-4632	375 x 375 lbs	1,669 x 1,669 N
Elongation @ Break	ASTM D-4632	15 x 8 %	15 x 8 %
CBR Puncture	ASTM D-6241	1,200 lbs	5,340 N
Trapezoidal Tear	ASTM D-4533	120 lbs	534 N
Apparent Opening Size ^(1,2)	ASTM D-4751	50 US Sieve	0.297 mm
Permittivity ⁽¹⁾	ASTM D-4491	0.2 Sec ⁻¹	0.2 Sec ⁻¹
Permeability ⁽¹⁾	ASTM D-4491	0.015 cm/sec	0.015 cm/sec
Water Flow Rate ⁽¹⁾	ASTM D-4491	15 g/min/f ²	611 L/min/m ²
Percent Open Area	CW-02215	3 %	3 %
UV Resistance @ 500 Hours	ASTM D-4355	70 %	70 %

⁽¹⁾ At the time of manufacturing. Handling, storage, and shipping may change these properties.

⁽²⁾ Maximum average roll value (MaxARV).

US 350 Shipping & Packaging Information

SIZE	DIAMETER	WIDTH	WEIGHT	AREA	ROLLS PER TRAILER
15' x 300'	13"	15'	275 lbs	500 y ²	120

US Fabrics, Inc. | 3904 Virginia Avenue | Cincinnati, OH 45227
Phone: (800) 518-2290 | Fax: (513) 271-4420 | email: info@usfabrics.com

This information is provided for reference only and is not intended as a warranty or guarantee.
US Fabrics assumes no liability in connection with the use of this information.