




US 380NW

Nonwoven Geotextile

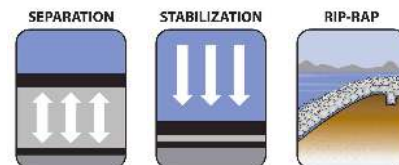

NTPEP APPROVED - GTX-2019-01-302. US 380NW is a nonwoven needlepunched geotextile made of 100% polypropylene staple filaments. US 380NW resists ultraviolet and biological deterioration, rotting, naturally encountered basics and acids. Polypropylene is stable within a pH range of 2 to 13. US 380NW meets the following M.A.R.V. values except where noted:



PROPERTY	TEST METHOD	ENGLISH	METRIC
Weight Typical	ASTM D-5261	16 oz/y ²	542.4 g/m ²
Grab Tensile Strength	ASTM D-4632	380 lbs	1,691 N
Elongation @ Break	ASTM D-4632	50 %	50 %
Mullen Burst ⁽³⁾	ASTM D-3786	750 psi	5,171 kPa
Pin Puncture ⁽³⁾	ASTM D-4833	240 lbs	1,070 N
CBR Puncture	ASTM D-6241	1,080 lbs	4,806 N
Trapezoidal Tear	ASTM D-4533	145 lbs	645 N
Apparent Opening Size ^(1,2)	ASTM D-4751	100 US Sieve	0.149 mm
Permittivity ⁽¹⁾	ASTM D-4491	0.7 Sec ⁻¹	0.7 Sec ⁻¹
Water Flow Rate ⁽¹⁾	ASTM D-4491	50 g/min/f ²	2,035 L/min/m ²
UV Resistance @ 500 Hours	ASTM D-4355	70 %	70 %

⁽¹⁾ At the time of manufacturing. Handling, storage, and shipping may change these properties.

⁽²⁾ Maximum average roll value (MaxARV).

⁽³⁾ Historical reference values. These properties are no longer recognized by ASTM or AASHTO for geosynthetics.

US 380NW Shipping & Packaging Information

SIZE	DIAMETER	WIDTH	WEIGHT	AREA	ROLLS PER TRAILER
15' x 150'	16"	15'	270 lbs	250 y ²	110
15' x 300'	32"	15'	540 lbs	500 y ²	48

US Fabrics, Inc. | 3904 Virginia Avenue | Cincinnati, OH 45227
Phone: (800) 518-2290 | Fax: (513) 271-4420 | email: info@usfabrics.com

This information is provided for reference only and is not intended as a warranty or guarantee.
US Fabrics assumes no liability in connection with the use of this information.