




US 5280

Woven Geotextile

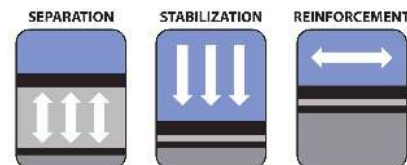

US 5280 is a woven geotextile made of 100% high tenacity, polypropylene yarns. US 5280 resists ultraviolet and biological deterioration, rotting, naturally encountered basics and acids. Polypropylene is stable within a pH range of 2 to 13. US 5280 meets the following M.A.R.V. values except where noted:



PROPERTY	TEST METHOD	ENGLISH	METRIC
Wide Width Tensile Strength	<u>ASTM D-4595</u>	5,280 x 5,280 lbs/ft	77.06 x 77.06 kN/m
Wide Width Tensile Strength @ 2 % Strain	<u>ASTM D-4595</u>	480 x 1,080 lbs/ft	7.01 x 15.76 kN/m
Apparent Opening Size ^(1,2)	<u>ASTM D-4751</u>	40 US Sieve	0.425 mm
Permittivity ⁽¹⁾	<u>ASTM D-4491</u>	0.4 Sec ⁻¹	0.4 Sec ⁻¹
Water Flow Rate ⁽¹⁾	<u>ASTM D-4491</u>	30 g/min/f ²	1,222 L/min/m ²
UV Resistance @ 500 Hours	<u>ASTM D-4355</u>	80 %	80 %

⁽¹⁾ At the time of manufacturing. Handling, storage, and shipping may change these properties.

⁽²⁾ Maximum average roll value (MaxARV).

US 5280 Shipping & Packaging Information

SIZE	WIDTH	AREA
15' x 300'	15'	500 y ²

US Fabrics, Inc. | 3904 Virginia Avenue | Cincinnati, OH 45227
Phone: [\(800\) 518-2290](tel:8005182290) | Fax: [\(513\) 271-4420](tel:5132714420) | email: info@usfabrics.com

This information is provided for reference only and is not intended as a warranty or guarantee.
US Fabrics assumes no liability in connection with the use of this information.