




PRODUCT DATA SHEET

WINFAB® 400HTM

WINFAB® 400HTM-USA

WINFAB® 400HTM & WINFAB® 400HTM-USA is a High Tensile Modulus geosynthetic manufactured by WINFAB on state-of-the-art manufacturing equipment using high tenacity polypropylene yarns that are woven together using innovative production technologies. WINFAB uses only the highest grade raw materials during the yarn extrusion process to ensure consistency in product quality. **WINFAB® 400HTM & WINFAB® 400HTM-USA** resists ultraviolet deterioration, rotting, and biological degradation and is inert to commonly encountered soil chemicals. WINFAB Laboratories are accredited by the Geosynthetic Accreditation Institute – Laboratory Accreditation Program (GAI-LAP).

WINFAB® 400HTM & WINFAB® 400HTM-USA provides superior reinforcement strength, soil interaction, high water flow, and excellent soil retention for the most reliable, predictable, and sustainable performance for the entire design life of the application.

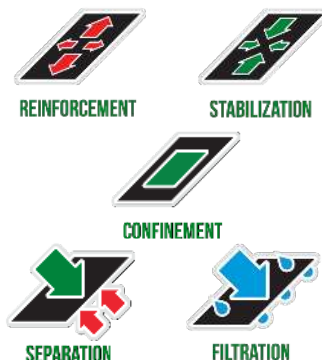

PROPERTY	TEST METHOD	MARV ENGLISH	MARV METRIC
Tensile Modulus @ 2% Strain (XD)	ASTM D4595	53000 lbs/ft	773 kN/m
Tensile Modulus @ 5% Strain (XD)	ASTM D4595	46500 lbs/ft	678 kN/m
Tensile Strength @ 2% Strain	ASTM D4595	600 x 1020 lbs/ft	8.8 x 14.9 kN/m
Tensile Strength @ 5% Strain	ASTM D4595	1800 x 2256 lbs/ft	26.3 x 32.9 kN/m
Interaction Coefficient**	ASTM D6706	0.89	0.89
UV Resistance (500 hrs)	ASTM D4355	90%	90%
Apparent Opening Size*	ASTM D4751	40 US Std. Sieve	0.425 mm
Permittivity	ASTM D4491	1.09 sec ⁻¹	1.09 sec ⁻¹
Water Flow Rate	ASTM D4491	80 gpm/ft ²	3260 lpm/m ²

*Maximum Average Roll Value

**Interaction Coefficient value is for Sand (SP) or gravel (GW) based on testing conducted by SGI Testing Services.

Domestic Procurement Preference

WINFAB® 400HTM-USA is compliant with the Build America, Buy America (BABA) Act, Pub. L. No. 117-58, div. G §§ 70901-52. To ensure BABA documentation is appropriately captured and maintained throughout the manufacturing process, BABA (along with any other regulatory requirements) must be specified at the time of quotation and order to WINFAB. The inclusion of a “-USA” suffix on the end of the style name indicates the product is BABA certifiable.

PROPERTY***	TEST METHOD	TYPICAL ENGLISH	TYPICAL METRIC
Roll Dimensions	Measured	15 ft x 300 ft	4.6 m x 91.4 m
Roll Area	Measured	500 yd ²	418 m ²

***Custom made-to-order options are available. Options include custom roll lengths, roll widths, and panel fabrication for ease of installation or enhanced project efficiencies. Please contact us for further information regarding WINFAB's custom production and fabrication services. Minimum order quantities may apply.

Disclaimer: WINFAB assumes no liability for the completeness or accuracy of this information or the ultimate use of this information. WINFAB disclaims any and all implied, expressed, or statutory standards, guarantees, or warranties. This includes without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to equipment, materials, or information furnished herewith. This document should not be construed as engineering advice. Always consult the project engineer for project specific requirements. The end user assumes sole responsibility for the use of this information and product. The information listed above are subject to change without notice. Build America, Buy America Act, Pub. L. No. 117-58 certification is conditional for WINFAB 400HTM, and is not a guarantee. Date Issued: 10.02.2023

WINFAB® & WINFAB® are trademarks of Willacoochee Industrial Fabrics, Inc.

©2023 Willacoochee Industrial Fabrics Inc.

WINFAB | www.winfabusa.com
1 Nashville Mills Rd. Nashville, GA 31639
Ph: (912) 534-5757 • Fax: (912) 534-5533

