




REINFORCING SUCCESS

WINFAB 1510 is manufactured using high tenacity polypropylene yarns that are woven to form a dimensionally stable network, which allows the yarns to maintain their relative position.

WINFAB 1510 resists ultraviolet deterioration, rotting, and biological degradation and is inert to commonly encountered soil chemicals.

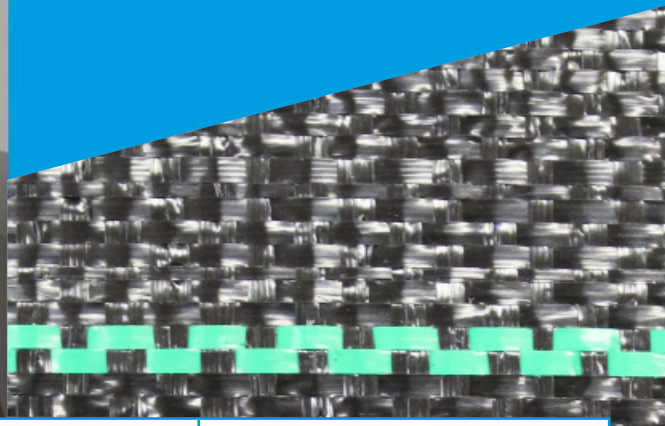

PROPERTY	TEST METHOD	TYPICAL ENGLISH	TYPICAL METRIC
Fabric Color	-	Black	Black
Stripe Color (Every 12 in)	-	Green	Green
Weight	ASTM D3776	3 oz/yd ²	101.7 g/m ²
Thickness	ASTM D1777	15 mils	.381 mm
Tensile Strength (Grab)	ASTM D4632	175 x 115 lbs	778.5 x 512 N
Elongation (Grab)	ASTM D4632	24% x 20%	24% x 20%
Trapezoidal Tear Strength	ASTM D4533	75 x 60 lbs	330 x 267 N
CBR Puncture	ASTM D6241	550 lbs	2,446.5 N
UV Resistance (2500 hrs)	ASTM D4355	70%	70%
Apparent Opening Size*	ASTM D4751	40 US Std. Sieve	0.425 mm
Water Flow Rate	ASTM D4491	12 gpm/ft ²	489.6 lpm/m ²

*Maximum Typical Roll Valve

PROPERTY	TEST METHOD	TYPICAL ENGLISH	TYPICAL METRIC
Roll Dimensions	Measured	3 ft x 300 ft	.914 m x 91.44 m
		4 ft x 300 ft	1.2 m x 91.44 m
		6 ft x 300 ft	1.8 m x 91.44 m
		10 ft x 300 ft	3.0 m x 91.44 m
		12 ft x 300 ft	3.7 m x 91.44 m
		15 ft x 300 ft	4.6 m x 91.44 m

Disclaimer: WINFAB assumes no liability for the completeness or accuracy of this information or the ultimate use of this information. WINFAB disclaims any and all implied, expressed, or statutory standards, guarantees, or warranties. This includes without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to equipment, materials, or information furnished herewith. This document should not be construed as engineering advice. Always consult the project engineer for project specific requirements. The end user assumes sole responsibility for the use of this information and product. The property values listed above are subject to change without notice.

© 2018 WINFAB