



Pneumatic Instrument Catalog



A Siebe Group Company

Contents

Title	Page
How to Order	2
Pneumatic Transmitters	4
Differential Pressure	5
Flow	11
Pressure	14
Liquid Level and Density	20
Temperature	26
Miscellaneous	29
Primary Measurement Elements	30
Orifice Plates and Flange Unions	31
IFOA Integral Flow Orifice Assemblies	33
Diaphragm Pressure Seals	36
Thermowells and DEWCEL Dew Point Measurement Systems	37
Large Case Instruments	38
Controllers	39
Recorders and Indicators	45
Recorders and Controllers	48
Elements	52
Miscellaneous	61
Panel Mounted Pneumatic Instruments	63
Indicating Controllers	64
Recorders and Controllers	73
Indicating Controllers	76
Loading, Switching and Bias	78
Computing Elements	80
Miscellaneous	82
Converters	83
Current-to-Pneumatic	84
Pneumatic-to-Current	87
Control Valves – Actuators	89
Accessories and Supplies	
HUMITEX Circular and Strip Charts	90
Pens and Pen Arms	92
Related Offerings	94

Specifying Your Instrument or Accessory

You can easily specify many instruments and accessories described in these pages. Sections covering our most popular items include all the technical data you need to know for most applications.

To specify the appropriate item, simply follow the step-by-step procedure at the end of each description.

For Example:

Choose the product code.

Itemize the information needed to complete the specification.

Ordering

To order, just contact your Foxboro representative.

Give us the ordering information using this catalog. Then tell us where you want the order shipped and when you need it delivered. We'll do the rest.

Need Help?

If you have questions, let us know. We're ready -and eager- to assist you. Applications are a Foxboro specialty. We can help you figure out the best instrument for your purpose.

How to Order	
1) SPECIFY MODEL NUMBER: 13	
Transmitter:	
316 ss body	A
Cadmium-plated carbon steel body	A1
Monel body	A4
Hastelloy C body (supplied without process connectors)	A5
Span Limits:	
5 and 62 kPa or 20 and 250 inH ₂ O ΔP	M
50 and 210 kPa or 200 and 850 inH ₂ O ΔP	H
Body Material:	
Cadmium-plated carbon steel (13A1 only)	K
316 ss (13A only)	S
Monel (13A4 only)	M
Hastelloy C (13A5 only) (Process Connectors code 0 below must be specified)	C
Process Connectors:	
1/4 NPT	1
1/2 NPT	2
R1/4	3
R1/2	4
Welding neck for 14 x 21 mm tube and 1/2 in Schedule 80 pipe	6
None, body tapped for 1/4 NPT	0
Optional Features: (also see previous page)	
Zero elevation kit	L
Zero suppression kit	R
2) SPECIFY OUTPUT SIGNAL _____	
2) SPECIFY CALIBRATED DIFFERENTIAL PRESSURE RANGE _____	
2) SPECIFY ADDITIONAL OPTIONAL FEATURES _____	
2) SPECIFY INFORMATION FOR INSTRUMENT TAG _____	

PNEUMATIC TRANSMITTERS

Foxboro Pneumatic Transmitters are the industry standard.

All of these instruments have been field proven through years of experience. They are precise, easy to maintain, and available in a wide range of materials.

The Foxboro line encompasses a variety of measurement types.

Flow Measurement

Differential pressure transmitters.

Temperature Measurement

Filled thermal systems and thermocouple/ RTD devices.

Pressure Measurement

Force balance and indicating transmitters.

Liquid Level Measurement

Differential pressure transmitters with or without chemical seals and buoyancy transmitters.

Other Applications

Sanitary designs, relative humidity transmitters, speed transmitters, and repeaters.

Foxboro is the leading single source of pneumatic transmitters for the process industries.

No other manufacturer makes as many types for as many applications.


Pneumatic Transmitters (Differential Pressure)

15A, 13A, 13H Series PNEUMATIC d/p Cell TRANSMITTERS

15A, 13A, 13H

- **15A**—low range transmitter adjustable for ranges from 0-1.3 to 0-6 kPa (0-5 to 0-25 inH₂O) ΔP at static pressures up to 3.5 MPa (500 psi).
- **13A**—adjustable for ranges from 0-5 to 0-210 kPa (0-20 to 0-850 inH₂O) ΔP at static pressures up to 14 MPa (2000 psi).
- **13H**—adjustable for ranges from 0-5 to 0-210 kPa (0-20 to 0-850 inH₂O) ΔP at static pressures up to 40 MPa (6000 psi).
- **Low Air Consumption.**

For complete specifications, refer to Product Specification Sheet PSS 2B-1C1 A.

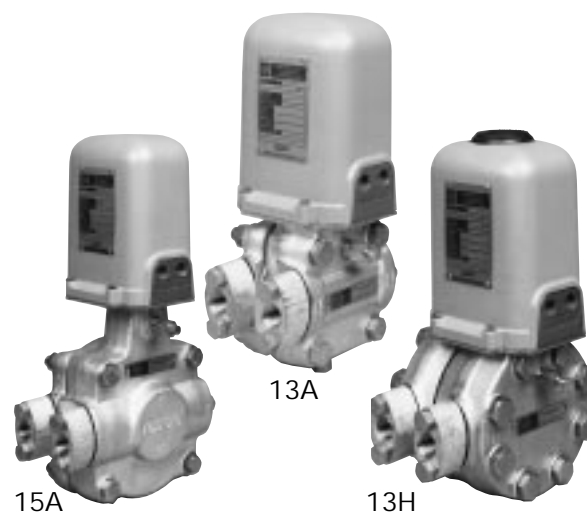

The 15A, 13A, 13H Series Pneumatic d/p Cell Transmitters measure differential pressure and transmit a proportional pneumatic output signal.

Functional Specifications

Static Pressure, Span, and Range Limits

Series	Static Pressure Limit	
	MPa	psi
15A	3.5	500
13A	14	2000
13H	40	6000

Series	Span Code	Span Limits	
		kPa ΔP	inH ₂ O ΔP
15A	L	1.3 and 6	5 and 25
13A and 13H	M H	5 and 62 50 and 210	20 and 250 200 and 850

Process Temperature Limits:

-40 and +120°C (-40 and +250°F) at capsule.

Ambient Temperature Limits:

-40 and +120°C (-40 and +250°F).

Series	Span Code	Range Limits (a)	
		kPa ΔP	inH ₂ O ΔP
15A	L	±12.5	±50
13A and 13H	M H	±62 ±210	±250 ±850

(a) Nonzero-based ranges require optional zero elevation or suppression kit. See "HOW TO ORDER." Upper and lower range values must not exceed range limits. Negative numbers indicate a higher pressure on the normal "Low Side" of the transmitter, such as may occur in closed tank application with a wet leg.

Output Signal and Supply Pressure:

Output Signal	Supply Pressure
20 to 100 kPa 3 to 15 psi	140 kPa 20 psi

Performance Specifications

Accuracy:

15A Series: ±0.5% of calibrated span.

13A and 13H Series: ±0.5% of calibrated span except +0.75% of calibrated span for calibrated spans greater than 130 kPa or 525 inH₂O ΔP .

Repeatability:

0.1% of calibrated span.

Hysteresis:

0.1% of calibrated span.

Pneumatic Transmitters (Differential Pressure)

15A, 13A, 13H

Physical Specifications

Materials of Wetted Parts:

Wetted Part	Series			
	15A1, 13A1, 13HA1	15A, 13A, 13HA	13A4	13A5
Body	carbon steel	AISI 316 ss	Monel	Hastelloy C
Capsule Diaphragm	AISI 316L ss	316L ss	Monel 400 (a)	Hastelloy C276
Other Capsule Parts	316 ss	316 ss	Monel	Hastelloy C
Force Bar	316 ss	316 ss	Monel	Hastelloy C
Force Bar Seal	cobalt-nickel	cobalt-nickel	cobalt-nickel	cobalt-nickel
Force Bar Gasket	silicone elastomer (b)	silicone elastomer (b)	Viton-A	Viton-A
Capsule Gaskets	316 ss	316 ss	Monel	ptfe
Process Connection Gaskets	ptfe (c)	ptfe (c)	ptfe	(d)

(a) Duranickel capsule diaphragm material supplied when Span Limits code H is specified.

(b) 13H Series uses Buna-N as standard.

(c) 13H Series uses glass filled ptfe as standard.

(d) Hastelloy C bodies are supplied without process connectors.

Mounting:

Direct to process or by bracket for DN 50 or 2 in horizontal or vertical pipe. Bracket is always supplied.

Enclosure Classification:

Meets IEC IP53 and provides the environmental protection of NEMA Type 3.

Materials:

Body Bolts: Alloy steel per ASTM A193 Grade B7; or 17-4 with Hastelloy C bodies.

Cover:

High impact, glass filled polycarbonate.

Air Connections:

The supply and output connections are tapped for 1/4 NPT.

Optional Features

Capsule Materials:

Hastelloy C, Monel, Duranickel, and tantalum.

HF Alkylation Service:

Maximum life with economical materials.

Chlorine Service Preparation:

Cleaned for chlorine service.

Hydrogen Service Preparation:

Gold-plated capsule to prevent hydrogen penetration.

High Damping:

Medium and low range capsules only.

NACE:

Compliance to NACE Standard MR-01-75.

Air Supply Set:

Adjustable regulators with or without gauge.

High Process Temperature:

Body temperature up to 190°C (375°F).

Integral Orifice:

For low flow measurements. Refer to Page 33.

Bypass Manifolds:

Refer to Page 29.

Oxygen Service Preparation:

Cleaned and packaged for oxygen service.

Lower Spans:

Provides spans as low as one-half standard.

How to Order

1) SPECIFY MODEL NUMBER: 15

Transmitter:

316 ss body.....A
Cadmium-plated carbon steel bodyA1

Span Limits:

1.3 and 6 kPa or 5 and 25 inH₂O ΔP.....L

Body Material:

Cadmium-plated carbon steel (15A1 only).....K
316 ss (15A only)S

Process Connectors:

1/4 NPT1
1/2 NPT2
R1/4 (metric)3
R1/2 (metric)4
Welding neck for 14 x 21 mm tube and 1/2 in Schedule 80 pipe6
None, body tapped for 1/4 NPT0

Optional Features: (also see previous page)

Zero elevation kitL
Zero suppression kitR

1) SPECIFY MODEL NUMBER: 13

Transmitter:

316 ss body.....A
Cadmium-plated carbon steel bodyA1
Monel bodyA4
Hastelloy C body (supplied without process connectors)A5

Span Limits:

5 and 62 kPa or 20 and 250 inH₂O ΔPM
50 and 210 kPa or 200 and 850 inH₂O ΔP.....H

Body Material:

Cadmium-plated carbon steel (13A1 only).....K
316 ss (13A only)S
Monel (13A4 only).....M
Hastelloy C (13A5 only) (Process Connectors code 0 below must be specified)C

Process Connectors:

1/4 NPT1
1/2 NPT2
R1/43
R1/24
Welding neck for 14 x 21 mm tube and 1/2 in Schedule 80 pipe6
None, body tapped for 1/4 NPT0

Optional Features: (also see previous page)

Zero elevation kitL
Zero suppression kitR

HOW TO ORDER Continued on Next Page.

15A, 13A, 13H

How to Order (continued)

1) SPECIFY MODEL NUMBER: 13H

Transmitter:

316 ss bodyA

Cadmium-plated carbon steel bodyA1

Span Limits:

5 and 62 kPa or 20 and 250 inH₂O ΔPM

50 and 210 kPa or 200 and 850 inH₂O ΔPH

Body Material:

Cadmium-plated carbon steel (13HA1 only)K

316 ss (13HA only)S

Process Connectors: (a)

1/4 NPT1

1/2 NPT2

R1/43

R1/24

None, body tapped for 9/16-18 Aminco fitting.....5

None, body tapped for 1/4 NPT0

Optional Features: (also see Page 6)

Zero elevation kitL

Zero suppression kitR

(a) The transmitter is normally supplied with body tapped for 1/4 NPT unless Process Connectors code 5 is specified.

- 2) SPECIFY OUTPUT SIGNAL _____
- 3) SPECIFY CALIBRATED DIFFERENTIAL PRESSURE RANGE _____
- 4) SPECIFY ADDITIONAL OPTIONAL FEATURES _____
- 5) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

11DM SERIES PNEUMATIC DIFFERENTIAL PRESSURE TRANSMITTERS

11DM

- **Differential Pressure Measurement** — ranges adjustable from 0-0.14 to 0-14.0 MPa (0-20 to 0-2000 psi) ΔP .

- **Low Air Consumption**

For complete specifications, refer to Product Specification Sheet PSS 2B-1A2 A.



The 11 DM Series Pneumatic Differential Pressure Transmitters measure differential pressure and transmit a proportional pneumatic signal.

Functional Specifications

Span and Range Limits:

Span Limits Code	Span Limits	
	MPa ΔP	psi ΔP
B	0.14 and 1.4	20 and 200
C	0.3 and 2.8	40 and 400
D	0.7 and 7.0	100 and 1000
E	1.4 and 14.0	200 and 2000

Span Limits Code	Range Limits (a), (b)	
	MPa ΔP	psi ΔP
B	-1.54 and +2.4	-220 and +350
C	-3.1 and +5.0	-440 and +750
D	-7.7 and +10.0	-1100 and +1500
E	-14.0 and +20.0	-2000 and +3000

(a) Negative values indicate that the higher of the two measured pressures is on the normal "low side" (body side) of the transmitter. Positive values indicate higher pressure is on the normal "high side" (connection block side). (b) Nonzero-based ranges require optional Zero Elevation or Suppression Kit.

Maximum Static Pressure:

The lower of the two measured pressures may not exceed the following pressure limits:

Span Limits Code	MPa	psi
B	2.4	350
C	5.0	750
D	10.0	1500
E	14.0	2000

Ambient Temperature Limits:

-40 and +120°C (-40 and +250°F).

Output Signal and Supply Pressure:

Output Signal	Supply Pressure
20 to 100 kPa	140 kPa
3 to 15 psi	20 psi

Performance Specifications

Accuracy:

±0.5% of calibrated span.

Repeatability:

0.1% of calibrated span.

Hysteresis:

Span Limits codes B, C, and D: 0.1% of calibrated span.

Span Limits code E: 0.2% of calibrated span.

Pneumatic Transmitters (Differential Pressure)

11DM

Physical Specifications

Materials of Wetted Parts:

316 ss = AISI Type 316 stainless steel.
316L ss = AISI Type 316L stainless steel

Body	316 ss
Capsule Bellows	316L ss or Monel
Other Capsule Parts	316 ss or Monel
Force Bar	316 ss
Force Bar Seal	cobalt-nickel
Force Bar Gasket	silicone elastomer
Capsule Gasket	silicone elastomer

Body Bolts:

Alloy steel per ASTM A193 Grade B7.

Cover:

High impact, glass filled polycarbonate.

Enclosure Classification:

Meets IEC IP53 and provides the environmental protection of NEMA Type 3.

Mounting:

Bracket for DN 50 or 2 in vertical or horizontal pipe.

Air Connections:

The supply and output connections are tapped for 1/4 NPT.

Optional Features

Oxygen Service Preparation:

Cleaned and packaged for oxygen service.

NACE:

Compliance to NACE Standard MR-01-71.

How To Order

1) SPECIFY MODEL NUMBER: 11DM-

Span Limits:

- 0.14 and 1.4 MPa or 20 and 200 psi.....B
- 0.3 and 2.8 MPa or 40 and 400 psi.....C
- 0.7 and 7.0 MPa or 100 and 1000 psi.....D
- 1.4 and 14 MPa or 200 and 2000 psi.....E

Wetted Parts:

- 316ssS
- 316 ss except Monel bellows assemblyD

Process Connection:

- 1/4 NPT1
- 1/2 NPT2
- R1/4 (metric)3
- R 1/2 (metric)4

Optional Features: (also see previous page)

- Zero elevation.....L
- Zero suppressionR

- 2) SPECIFY OUTPUT SIGNAL** _____
- 3) SPECIFY CALIBRATED PRESSURE RANGE** _____
- 4) SPECIFY OPTIONAL FEATURES** _____
- 5) SPECIFY INFORMATION FOR INSTRUMENT TAG** _____

14A SERIES PNEUMATIC FLOW INTEGRATORS

14A

■ Durable

- self-cleaning, self-aligning ball and thrust plate bearings.
- gasketed cast aluminum cover.

■ Versatile

- field or panel mounting up to several hundred feet from point of measurement.

■ Stable

- force balance unit minimizes variations in air supply pressure or ambient temperature.

■ Multiple Ranges

- changeable counting speed can match almost any flow range.
- no recalibration required.

For complete specifications, refer to General Specification Sheet GS 2B-5A1 A.



The 14A Series Pneumatic Flow Integrator receives signal from transmitter, extracts square root, and totalizes flow on integral counter in engineering units.

Functional Specifications

Input Signal and Supply Pressure

Input Signal	Supply Pressure
20 to 100 kPa	140 kPa
3 to 15 psi	20 psi

Counter:

6-digit, nonreset except PB and EB Series which have 5-digit with manual reset.

Count Rates and Integrator Factors:

Count rate upper range values are shown in the following table. Integrated flow is displayed directly when the count rate is set equal to the maximum flow rate. Other flow rates can be accommodated using the count rate times the integrator factor. Example: Reading x 100 = Gallons.

Available Count Rate:

Upper Range Values

Counts per Minute	Counts per Hour	Counts per Day
4.75 to 49.21	285 to 2953	6 840 to 70 870
excluding:	excluding:	excluding:
5.46 to 5.54,	328 to 332,	7 870 to 7 980,
9.11 to 9.50,	547 to 570,	13 120 to 13 680,
and	and	and
10.93 to 11.08	656 to 665	15 750 to 15 960

PB, EB Series Only

Output Signal:

PB: Taken from supply pressure source and going to 0 at termination of batch.

EB: Contact actuation either normally open or normally closed. Changes state at termination of batch. Switch rating 3 A at 120 V ac, 0.5 A at 125 V dc.

Manual Reset:

Resets counter and batch contact.

Batch Set:

Manually set predetermining wheels on counter.

Brake Assembly:

To prevent coasting.

Electrical Classification (EB only):

Foxboro and CSA certified for use in ordinary locations.

EP Series Only

Contact Actuation:

Either normally open or normally closed. Electric relay circuit limits contact duration to approximately 100 ms. Contact actuates once for each 1, 10, or 100 counts, as specified .

Supply Voltage:

120 V + 10%, -15%, 50 or 60 Hz.

Electrical Classification:

Foxboro and CSA certified for use in ordinary locations.

Performance Specifications

Accuracy:

±0.5% of full scale calibrated between 30 and 100% of flow.

Input Signal:

Input cutoff point set for approximately 7% flow.
Input startup point set for approximately 11 % flow.

Repeatability:

0.2% of full scale.

Physical Specifications

Body:

Cast aluminum with acrylic enamel finish.

Specification	Cover	Case
14A Series	High-impact, glass-filled polycarbonate, gasketed, weatherproof.	—
14A-PB, 14A-EB Series	High-impact, glass-filled polycarbonate and drawn steel, gray acrylic enamel finish, gasketed, weatherproof.	Drawn steel, gray acrylic enamel finished, gasketed, weatherproof.
14A-EP Series	High-impact, glass-filled polycarbonate, gray acrylic enamel finish, gasketed, weatherproof.	Drawn steel, gray acrylic enamel finished, gasketed, weatherproof.

Optional Features

External Reset Knob:

For panel mounted PB and EB only.

Brake Assembly:

Standard on PB and EB Series. Eliminates coasting of integrator rotor.

Foxboro and CSA Certified:

For use in Class I, Groups A, B, C, and D, Division 2. For EP Series only.

Integral Mounting to d/p Cell Transmitter:

For 14A-F, 14A-PBF, 14AEBF, and 14A-EPF only.
Supply regulator included with this option.

How to Order

1) SPECIFY MODEL NUMBER: 14A-

Integral Nonreset Counter:

Panel Mounted.....	—
Field Mounted.....	.F
Field Mounted with supply regulator	FR

Integral Predetermining Counter and Pneumatic Output Signal:

Panel Mounted.....	PB
Field Mounted.....	.PBF
Field Mounted with supply regulator.....	PBFR

Integral Predetermining Counter and Electric Contact Actuation:

Panel Mounted.....	EB
Field Mounted.....	.EBF
Field Mounted with supply regulator.....	EBFR

Integral Nonreset Counter and Electric Contact Actuation:

Panel Mounted	EP (a)
Field MountedEPF (a)
Field Mounted with supply regulator	EPFR (a)

(a) Specify number of counts per contact actuation (1,10, or 100 counts).

2) SPECIFY ELECTRICAL CLASSIFICATION (EB and EP only) _____

3) SPECIFY INPUT SIGNAL _____

4) SPECIFY COUNTS PER MINUTE, HOUR, OR DAY

(AT MAXIMUM FLOW RATE) _____

5) SPECIFY INTEGRATOR FACTOR _____

6) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

Pneumatic Transmitters (Pressure)

11GM, 11GH



The 11 GM, 11 GH Series Pneumatic Gauge Pressure Transmitters measure gauge pressure and transmit a proportional pneumatic output signal.

11GM, 11GH SERIES PNEUMATIC GAUGE PRESSURE TRANSMITTERS

- **11GM**—pressure measurement ranges adjustable from 0-0.07 to 0-14 MPa (0-10 to 0-2 000 psi).
- **11GH**—pressure measurement ranges adjustable from 0-7.0 to 0-80 MPa (0-1 000 to 0-12 000 psi).
- **Low Air Consumption.**

For complete specifications, refer to Product Specification Sheet PSS 2B-1A3 A.

Functional Specifications

Span, Range, and Overrange Limits:

Series	Span Limits Code	Span Limits	
		MPa	psi
11GM	A	0.07 and 0.56	10 and 80
	B	0.14 and 1.4	20 and 200
	C	0.3 and 2.8	40 and 400
	D	0.7 and 7	100 and 1 000
	E	1.4 and 14	200 and 2 000
11GH	K	7 and 40	1 000 and 6 000
	N	14 and 80	2 000 and 12 000

Series	Span Limits Code	Range Limits (a)	
		MPa	psi
11GM	A	-0.1 and +0.6	-15 and +90
	B	-0.1 and +2.4	-15 and +350
	C	-0.1 and +5	-15 and +750
	D	-0.1 and +10	-15 and +1 500
	E	-0.1 and +20	-15 and +3 000
11GH	K	-0.1 and +40	-15 and +6 000
	N	-0.1 and +80	-15 and +12 000

(a) Nonzero-based ranges require optional zero elevation or suppression kit. See "HOW TO ORDER."

Series	Span Limits Code	Maximum Overrange Pressure Limit (b)	
		MPa	psi
11GM	A	0.7	100
	B	3.5	500
	C	7	1 000
	D	14	2 000
	E	28	4 000
11GH	K	62	9 000
	N	124	18 000

(b) Overrange limit of Span Limits code E with Wetted Parts code M on Page 15 is reduced to 21 MPa (3 000 psi).

Output Signal and Supply Pressure

Output Signal	Supply Pressure
20 to 100 kPa 3 to 15 psi	140 kPa 20 psi

Ambient Temperature Limits:

-40 and +120°C (-40 and +250°F).

Body Temperature Limits:

11GM Series: -40 and +190°C (-40 and + 375°F).

11GH Series: -40 and +120°C (-40 and +250°F).

Performance Specifications

Accuracy:

Series	Spans Between		Accuracy (% of Span)
	MPa	psi	
11GM	All Spans		±0.5
11GH-K	7 and 20	1 000 and 3 000	±0.5
	20 and 40	3 000 and 6 000	±1
11GH-N	14 and 40	2 000 and 6 000	±0.5
	40 and 80	6 000 and 12 000	±1

Repeatability:

11 GM Series:

Wetted Parts code S: 0.1% of calibrated span.

Wetted Parts code M: 0.2% of calibrated span.

11 GH Series:

0.15% of calibrated span.

Physical Specifications

Materials of Wetted Parts:

Item	Wetted Parts Code		
	S	M	C
Element	316ss	Monel	Ni-Span
Connection Block	316ss	Monel	316ss
Connection Gasket	Silicone Elastomer	Viton-A	(none)

Materials:

Cover: High-impact, glass-filled polycarbonate.

Body Bolts: Alloy steel per ASTM A193 Grade B7.

Enclosure Classification:

Meets IEC IP53 and provides the environmental protection of NEMA Type 3.

Air Connections:

The supply and output connections are tapped for 1/4 NPT.

Optional Features

Air Supply Set:

Adjustable regulators with or without gauge.

High Accuracy Calibration (11GM only):

Accuracy of +0.25% of calibrated span.

Pressure Seals:

Refer to Page 36.

NACE (11 GM only):

Compliance to NACE Standard MR-01-75.

Oxygen Service Preparation:

Cleaned and packaged for oxygen service.

How to Order

1) SPECIFY MODEL NUMBER: 11GM-

Span Limits:

0.07 and 0.56 MPa or 10 and 80 psi	A
0.14 and 1.4 MPa or 20 and 200 psi	B
0.3 and 2.8 MPa or 40 and 400 psi	C
0.7 and 7 MPa or 100 and 1000 psi	D
1.4 and 14 MPa or 200 and 2000 psi	E

Wetted Parts:

316ss	S
Monel (a)	M

Process Connection:

1/4 NPT	1
1/2 NPT	2
R1/4 (metric)	3
R1/2 (metric)	4
Machined for 9/16-18 Aminco fitting (b)	5

Optional Features: (also see above)

Zero elevation	L
Zero suppression	R

(a) Not available with Span Limits code A above.

(b) Not available with Span Limits code A or Wetted Parts code M above.

HOW TO ORDER Continued on Next Page.

11GM, 11GH

How to Order (continued)

1) SPECIFY MODEL NUMBER: 11GH-

Span Limits:

- 7 and 40 MPa or 1 000 and 6 000 psiK
- 14 and 80 MPa or 2 000 and 12 000 psi.....N

Wetted Parts:

- Ni-Span element with 316 ss connectionC

Process Connection:

- 1/2 NPT2
- R 1/2 (metric)4
- Machined for 9/16-18 Aminco fitting5

Optional Features: (also see previous page)


- Zero elevationL
- Zero suppressionR

- 2) SPECIFY OUTPUT SIGNAL _____
- 3) SPECIFY CALIBRATED PRESSURE RANGE _____
- 4) SPECIFY OPTIONAL FEATURES _____
- 5) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

11AL, 11AM, 11AH SERIES PNEUMATIC ABSOLUTE PRESSURE TRANSMITTERS

- **11AL**—adjustable for ranges from 0-1.3 to 0-5.3 kPa (0-10 to 040 mmHg) absolute.
- **11AM**—adjustable for ranges from 0-5.3 to 0-200 kPa (0-40 to 01520 mmHg) absolute.
- **11AH**—adjustable for ranges from 0-0.7 to 0-2.7 MPa (0-10 to 0400 psi) absolute.
- **Low air consumption.**

For complete specifications, refer to Product Specification Sheet PSS 2B-1A1 A.

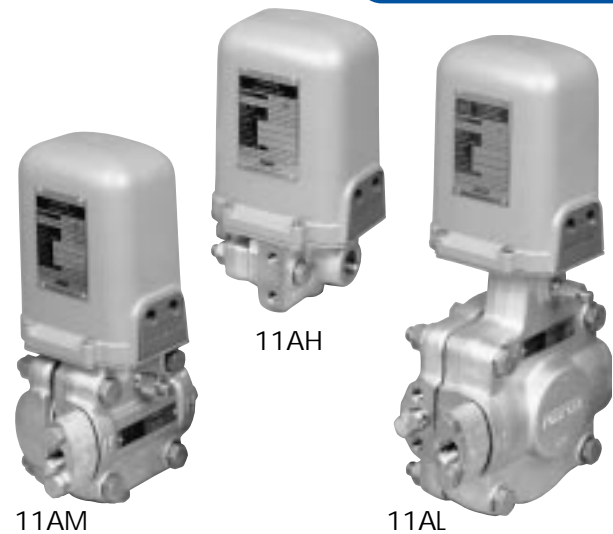

The 11AL, 11AM, 11AH Series Pneumatic Absolute Pressure Transmitters measure absolute pressure and transmit a proportional pneumatic output signal.

Functional Specifications

Span, Range, and Overrange Limits (in absolute pressure units):

Series	Span Limits Code	Span Limits	
11AL	L	1.3 and 5.3kPa	10 and 40 mmHg
11AM	M	5.3 and 53 kPa	40 and 400 mmHg
	H	50 and 200 kPa	375 and 1520 mmHg
11AH	A	0.07 and 0.55 MPa	10 and 80 psi
	B	0.14 and 1.4 MP	20 and 200 psi
	C	0.3 and 2.7 MP	40 and 400 psi

Series	Span Limits Code	Maximum Overrange Pressure Limit	
		MPa	psi
11AL	L	0.8	115
11AM	M	0.8	115
	H	1.1	165
11AH	A	0.7	100
	B	2.4	350
	C	5.2	750

Series	Span Limits Code	Range Limits (a)	
11AL	L	0 and 9.3 kPa	0 and 70 mmHg
11AM	M	0 and 53 kPa	0 and 400 mmHg
	H	0 and 200 kPa	0 and 1520 mmHg
11AH	A	0 and 0.62 MPa	0 and 90 psi
	B	0 and 2.4 MPa	0 and 350 psi
	C	0 and 5 MPa	0 and 750 psi

(a) Nonzero-based ranges require optional zero suppression kit (standard for 11AM). See "HOW TO ORDER."

Maximum Process Temperature:
120°C (250°F) at capsule.

Ambient Temperature Limits:
-40 and + 120°C (-40 and +250°F).

Output Signal and Supply Pressure:

Output Signal	Supply Pressure
20 to 100 kPa 3 to 15 psi	140 kPa 20 psi

Performance Specifications

Accuracy:

Series	Spans Between		Accuracy (% of Span)
	kPa	mmHg	
11AL	All Spans		±1.0%
11AM-M	5.3 and 13	40 and 100	±0.5%
	13 and 53	1100 and 400	±1.0%
11 AM-H	50 and 113	375 and 850	±0.5%
	113 and 200	1850 and 1520	±1.0%
11AH	All Spans		±0.5%

Repeatability:

11AL Series: 0.5% of calibrated span.

11AM, 11AH Series: 0.1% of calibrated span.

Hysteresis:

11AL Series: 0.5% of calibrated span.

11AM Series: 0.25% of calibrated span.

11AH Series: 0.15% of calibrated span.

Pneumatic Transmitters (Pressure)

11AL, 11AM, 11AH

Physical Specifications

Materials of Wetted Parts:

Wetted Part	Body Material	
	AISI 316 ss	Monel
Capsule Diaphragm	AISI 316L ss	Monel
Other Capsule Parts	316 ss	Monel
Force Bar	316 ss	Monel
Force Bar Seal	cobalt-nickel	cobalt-nickel
Force Bar Gasket	silicone elastomer	Viton-A
Capsule Gasket	316 ss (a)	Monel
Process Connector Gasket	ptfe (a)	ptfe

(a) 11AH Series uses single silicone elastomer gasket as capsule and connector gasket.

Materials:

Body Bolting: Alloy steel per ASTM A193 Grade B7.

Cover: High-impact, glass-filled polycarbonate.

Mounting:

Bracket for nominal DN 50 or 2 in pipe.

Enclosure Classification:

Meets IEC IP53 and provides the protection of NEMA Type 3.

Air Connections:

The supply and output connections are tapped for 1/4 NPT.

Optional Features

Air Supply Sets:

Adjustable regulators with or without output gauge.

Oxygen Service Preparation:

Cleaned and packaged for oxygen service.

How to Order

1) SPECIFY MODEL NUMBER: 11AL-

Span Limits:

1.3 and 5.3 kPa or 10 and 40 mmHg absoluteL

Body Material:

AISI Type 316 stainless steel (316 ss)S

Process Connections:

Tapped for 1/4 NPT1

Tapped for 1/2 NPT2

Tapped for R1/4 (metric)3

Tapped for R1/2 (metric)4

Welding neck for 14 x 21 mm tube and 1/2 in Schedule 80 pipe6

Optional Zero SuppressionR

HOW TO ORDER Continued on Next Page.

How to Order

1) SPECIFY MODEL NUMBER: 11AM-

Span Limits:

5.3 and 53 kPa or 40 and 400 mmHg absolute.....M
 50 and 200 kPa or 375 and 1520 mmHg absolute.....H

Body Material:

316ssS
 Money Not available with Span Limits code H above.....M

Process Connections:

Tapped for 1/4 NPT1
 Tapped for 1/2 NPT2
 Tapped for R1/4 (metric)3
 Tapped for R1/2 (metric)4
 Welding neck for 14 x 21 mm tube and 1/2 in Schedule 80 pipe.....6

1) SPECIFY MODEL NUMBER: 11AH-

Span Limits:

0.07 and 0.55 MPa or 10 and 80 psi absolute.....A
 0.14 and 1.4 MPa or 20 and 200 psi absolute.....B
 0.3 and 2.7 MPa or 40 and 400 psi absolute.....C

Body Material:

316 ssS

Process Connections:

Tapped for 1/2 NPT2
 Tapped for R1/2 (metric)4

Optional Zero Suppression.....R

2) SPECIFY OUTPUT SIGNAL _____

3) SPECIFY CALIBRATED ABSOLUTE PRESSURE RANGE _____

4) SPECIFY OPTIONAL FEATURES _____

5) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

Pneumatic Transmitters *(Liquid Level and Density)*

15F, 13F, 13FE



The 15F, 13F, 13FE Series Pneumatic Liquid Level or Density Flanged d/p Cell Transmitters measure hydrostatic head of liquid and transmit a proportional pneumatic output signal.

PNEUMATIC LIQUID LEVEL OR DENSITY FLANGED d/p Cell TRANSMITTERS

- **15F — Low Range Flush Diaphragm Transmitter** adjustable for ranges from 0-0.13 to 0-0.63 m (0-5 to 0-25 in) head of water.
- **13F — Flush Diaphragm Transmitter** adjustable for ranges from 0-0.51 to 0-21.6 m (0-20 to 0-850 in) head of water.
- **13FE — Extended Diaphragm Transmitter** for measurements from 0-0.51 to 0-21.6 m (0-20 to 0-850 in) head of water.
- **Low Air Consumption**

For complete specifications, refer to Product Specification Sheet PSS 2B- 1D2 A.

Functional Specifications

Span Limits:

Series	Span Limits Code	Span Limits (Head of Water)	
		metres	inches
15F	L	0.13 and 0.63	5 and 25
13F, 13FE	M	0.51 and 6.3	20 and 250
	H	5.1 and 21.6	200 and 850

Range Limits:

Series	Span Limits Code	Range Limits (Head of Water) (a)	
		metres	inches
15F	L	±1.3	±50
13F, 13FE	M	±6.3	±250
	H	±21.6	±850

(a) Non zero-based ranges require optional zero elevation or suppression kit. Upper and lower range values must not exceed range limits. Negative numbers indicate a higher pressure on the normal "low side" of the transmitter, such as may occur in a closed tank application with a wet leg.

Process Temperature Limits:

ANSI Flanges: -40 and +190°C (-40 and +375°F).

DIN Flanges:

-40 and +120°C (-40 and +250°F).

Ambient Temperature Limits:

-40 and +120°C (-40 and +250°F).

Output Signal and Supply Pressure:

Output Signal	Supply Pressure
20 to 100 kPa 3 to 15 psi	140 kPa 20 psi

Performance Specifications

Accuracy:

±0.5% of calibrated span for all models except for spans greater than 13.3 m (525 in) head of water which are ±0.75%.

Repeatability:

0.1% of calibrated span.

Hysteresis:

15F Series: 0.1 % of calibrated span or 0.25 mm (0.01 in) head of water, whichever is larger.

13F and 13FE Series: 0.1 % of calibrated span or 1.25 mm (0.05 in) head of water, whichever is larger.

Physical Specifications

Body and Flange Material:

Carbon steel or 316 ss (b), as specified.

Materials of Wetted Parts:

High Pressure Side:

Capsule Diaphragm: 316L ss (c).

Other Capsule Parts: 316 ss.

Capsule Gaskets:

15F, 13F Series: 316 ss.

13FE Series: None.

Retaining Ring (d): 316 ss.

Low Pressure Side (Partial List):

Capsule Diaphragm: 316L ss.

Force Bar: 316 ss.

Force Bar Seal: Cobalt-nickel.

Force Bar Gasket: Silicone elastomer.

Capsule Gaskets:

15F, 13F Series: 316 ss.

13FE Series: ptf.


(b) AISI Type 316 stainless steel.

(c) AISI Type 316L stainless steel.

(d) Raised face portion of flange.

Mounting:

Provided by process connection flange. See "HOW TO ORDER."

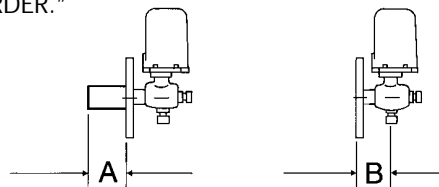

Nominal Diaphragm Extension Length "A"
(13FE Series): See "HOW TO ORDER."

Flange Extension Length "B":

15F and 13FE Series: 125 mm (5 in).

13F Series: 125 or 200 mm (5 or 8 in), as specified.

Enclosure Classification:

Meets IEC IP53 and provides the environmental protection of NEMA Type 3.

Cover Material:

High-impact, glass-filled polycarbonate.

Optional Specifications

Wetted Parts Materials:

Monel, Duranickel, Hastelloy C, tantalum, and various coatings.

High Process Temperature:

To 315°C (600°F).

Lower Spans:

Provides spans as low as one-half standard.

Air Supply Sets:

Adjustable regulators with or without gauge.

How to Order

1) SPECIFY MODEL NUMBER: 15F-

Transmitter:

316 ss body and flange.....A
Cadmium-plated carbon steel body and flangeA1

Span Limits:

0.13 and 0.63 m or 5 and 25 in head of water.....L

Body and Flange Material; and Connection:

Carbon steel 6 in ANSI Class 150K61A
316 ss 6 in ANSI Class 150S61A
Carbon steel 150 mm, 16 Bar, DIN, and BSK61D
316 ss 150 mm, 16 Bar, DIN, and BSS61 D

Flange Extension Length:

125 mm (5 in).....5

Elevation or Suppression (Optional):

Zero elevation kit.....L
Zero suppression kit.....R

HOW TO ORDER Continued on Next Page.

15F, 13F, 13FE

How to Order (continued)

1) SPECIFY MODEL NUMBER: 13F-

Transmitter:

316 ss body and flange.....A
Cadmium-plated carbon steel body and flangeA1

Span Limits:

0.51 and 6.3 m or 20 and 250 in head of water.....M
5.1 and 21.6 m or 200 and 850 in head of waterH

Body and Flange Material; and Connection:

Carbon steel 3 in ANSI Class 150K31A
Carbon steel 3 in ANSI Class 300K33A
316 ss 3 in ANSI Class 150S31A
316 ss 3 in ANSI Class 300S33A
Carbon steel 80 mm,10/40 Bar, DIN, and BSK33D
316 ss 80 mm,10/40 Bar, DIN, and BSS33D

Flange Extension Length:

125mm(5in)5
200 mm (8 in)8

Elevation or Suppression (Optional):

Zero elevation kit.....L
Zero suppression kit.....R

1) SPECIFY MODEL NUMBER: 13FE-

Transmitter:

316 ss body and flange.....A
Cadmium-plated carbon steel body and flangeA1

Span Limits:

0.51 and 6.3 m or 20 and 250 in head of water.....M
5.1 and 21.6 m or 200 and 850 in head of waterH

Body and Flange Material; and Connection:

Carbon steel 4 in ANSI Class 150.....K41A
Carbon steel 4 in ANSI Class 300.....K43A
316 ss 4 in ANSI Class 150.....S41A
316 ss 4 in ANSI Class 300.....S43A
Carbon steel 100 mm,16 Bar, DIN, and BSK41D
Carbon steel 100 mm, 40 Bar, DIN, and BSK43D
316 ss 100 mm,16 Bar, DIN, and BSS41D
316 ss 100 mm, 40 Bar, DIN, and BSS43D

Flange Extension Length:

125 mm (5 in)5

Nominal Diaphragm Extension Length:

50 mm (2 in)2
100 mm (4 in)4
150 mm (6 in)6

Elevation or Suppression (Optional):

Zero elevation kit.....L
Zero suppression kit.....R

2) SPECIFY OUTPUT SIGNAL _____

3) SPECIFY CALIBRATED DIFFERENTIAL PRESSURE RANGE _____

4) SPECIFY OPTIONAL FEATURES _____

5) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

13DMP, 13DEMP SERIES PNEUMATIC d/p Cell TRANS- MITTERS WITH MATCHED PRESSURE SEALS FOR LIQUID LEVEL MEASUREMENT

13DMP, 13DEMP



The 13DMP, 13DEMP Series Pneumatic d/p Cell Transmitters with matched pressure seals measure differential pressure and transmit a proportional pneumatic output signal.

- **Low Air Consumption**
- **13DMP—FLUSH TYPE with 3-inch flange connections.**
- **13DEMP—EXTENDED TYPE with 4-inch flange connections.**
- **Pressure Seals**
 - eliminate problems caused by repeaters and wet and dry legs.
 - make installation and adjustments easier than other approaches.
 - provide positive isolation with a minimum of process wetted parts.
 - allow higher process temperatures.
- **Ideal for Pressurized or Evacuated Vessels**

For complete specifications, refer to Product Specification Sheet PSS 2B-1C1 B.

Functional Specifications

Span and Range Limits:

Series	Span Limits (Head of Water)	
	metres	inches
13DMP-M, 13DEMP-M	0.51 and 6.4	20 and 250
13DMP-H, 13DEMP-H	5.1 and 21.6	200 and 850

Series	Range Limits (Head of Water) (a)	
	metres	inches
13DMP-M, 13DEMP-M	-6.4 and +6.4	-250 and +250
13DMP-H, 13DEMP-H	-21.6 and +21.6	-850 and +850

(a) Negative numbers indicate a higher pressure on the normal "Low Side" of the transmitter.

Process Temperature Limits:
-37 and +150°C (-35 and +300°F).

Ambient Temperature Limits:
-37 and +80°C (-35 and +180°F).

Output Signal and Supply Pressure:

Output Signal	Supply Pressure
20 to 100 kPa 3 to 15 psi	140 kPa 20 psi

Performance Specifications

Accuracy:

Spans (Head of Water) Between		Accuracy (b) % of Span
metres	inches	
0.51 and 13	20 and 525	±0.5
13 and 21.6	525 and 850	±1.0

(b) Includes linearity, hysteresis, and repeatability.

Repeatability:
0.1% of calibrated span.

Hysteresis:
0.2% of calibrated span.

Pneumatic Transmitters (Liquid Level)

13DMP, 13DEMP

Physical Specifications

Materials of Wetted Parts:

Remote Seal Diaphragms	Raised Face Backup Pads (Gasket Surface)
AISI Type 316L stainless steel (316L ss)	AISI Type 316 stainless steel (316 ss)
Hastelloy C276	Hastelloy C
Tantalum	

Materials of Nonwetted Parts:

Description	Material
Flanges	316 ss or carbon steel
Capillary	316ss
Transmitter Body	316ss
Fill Fluid	DC 200 silicone (c)

(c) Relative density (specific gravity) is 0.90 at 25°C (77°F).

Capillary Lengths:

See "HOW TO ORDER."

Mounting:

Seals mount by process connection flanges. See "HOW TO ORDER." Transmitter body mounts to bracket for DN 50 or 2 in vertical or horizontal pipe.

Enclosure Classification:

Meets IEC IP53 and provides the environmental protection of NEMA Type 3.

Cover Material:

High-impact, glass-filled polycarbonate.

Air Connections:

The supply and output connections are tapped for 1/4 NPT.

Optional Specifications

Air Supply Set:

Adjustable regulators with or without gauge.

High Temperature Fill:

For process temperatures up to 300°C (580°F).

How to Order

1) SPECIFY MODEL NUMBER: 13DMP-

Span Limits:

0.51 and 6.4 m or 20 and 250 in head of waterM
5.1 and 21.6 m or 200 and 850 in head of waterH

Wetted Parts Material:

316 ss with 316L ss diaphragmS
Hastelloy C with Hastelloy C276 diaphragmC
TantalumT

Capillary Length (each capillary):

1.5m(5ft)A
4.5m(15ft)B
8 m (26 ft)C

Process Connections (nonprocess wetted):

Carbon steel 3 in ANSI Class 150K31A
Carbon steel 3 in ANSI Class 300K33A
Carbon steel 3 in ANSI Class 600K36A
316 ss 3 in ANSI Class 150S31A
316 ss 3 in ANSI Class 300S33A
316 ss 3 in ANSI Class 600S36A
Carbon steel 80 mm 10/40 Bar, DIN and BSK33D
316 ss 80 mm 10/40 Bar, DIN and BSS33D

HOW TO ORDER Continued on Next Page.

How to Order (continued)

1) SPECIFY MODEL NUMBER: 13DEMP-

Span Limits:

0.51 and 6.4 m or 20 and 250 in head of waterM
 5.1 and 21.6 m or 200 and 850 in head of waterH

Wetted Parts Material:

316 ss with 316L ss diaphragm.....S
 Hastelloy C with Hastelloy C276 diaphragm.....C

Capillary Length (each capillary):

1.5m (5 ft)A
 4.5m (15 ft)B
 8m (26 ft)C

Extension Length:

50mm (2 in)2
 100mm (4 in)4
 150mm (6 in)6

Process Connections (nonprocess wetted): Carbon steel, 4 in ANSI

Class 150K41A
 Class 300K43A
 Class 600K46A

2) SPECIFY OUTPUT SIGNAL _____

3) SPECIFY CALIBRATED DIFFERENTIAL PRESSURE RANGE _____

4) SPECIFY OPTIONAL FEATURES _____

5) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

Note: For liquid level applications, zero elevation kits always required due to wet leg effect of filled seal system; therefore, it is a standard part of the 13DMP and 13 DEMP Series Transmitters.

Pneumatic Transmitters (Temperature)

12A



The 12A Series Pneumatic Temperature Transmitters measure temperature and transmit a proportional pneumatic output signal.

12A SERIES PNEUMATIC TEMPERATURE TRANSMITTERS

■ Trouble-Free

- force balance mechanism has no moving parts.

■ Accurate

■ Responsive

- comparable to an unsheathed thermocouple.

■ Simple Range Change

- span can be elevated or suppressed 100%.
- adjustment involves only three parts.

■ Easy Installation

- a variety of mounting positions.

■ Low Air Consumption

For complete specifications, refer to Product Specification Sheet PSS 2B-1B1 A.

Functional Specifications

Range Limits, Spans, and Maximum Overrange Temperatures (Maximum ORT):

Series	Sensor Sensitive Length "X"		Fahrenheit (F°)			
			Range Limits		Span	Maximum ORT
	mm	in	Lower	Upper		
12A* and 12AS*	150	6	-100	+330	50	330
			-100	+1000	100	1000
			-100	+1000	125	1000
			-100	+1000	150	1000
			-100	+1000	200	1000
12A and 12AS	75	3	-100	+150	50	330
			-100	+650	100	1000
			-100	+850	150	1000
			-100	+1000	200	1000
			-100	+1000	200	1000
	75 or 150	3 or 6	-100	+1000	250	1000
			-100	+1000	300	1000
			-100	+1000	400	1000
	150	6	-40	+1000	500	1000
			0	+1000	600	1000
12A-C	150	6	+200	+1000	800	1000
			-350	+330	50	330
			-350	+400	100	600
			-300	+600	150	600
			-250	+600	200	600
			-200	+600	250	600
			-150	+600	300	600
12A-H	150	6	-250	+600	200	600
			-250	+600	200	600

Series	Sensor Sensitive Length "X"		Celsius (C°)			
			Range Limits		Span	Maximum ORT
	mm	in	Lower	Upper		
12A* and 12AS*	150	6	-75	+125	25	125
			-75	+460	50	460
			-75	+550	75	550
			-75	+550	100	550
			-75	+550	100	550
12A and 12AS	75	3	-75	+70	25	125
			-75	+300	50	460
			-75	+550	75	550
			-75	+550	100	550
	75 or 150	3 or 6	-75	+550	150	550
12A-C	150	6	-75	+550	200	550
			0	+550	300	550
			-210	+125	25	125
			-220	+200	50	320
			-170	+320	100	320
12A-H	150	6	-140	+320	150	320
			-95	+320	200	320
			-160	+320	100	320
			-160	+320	100	320
	75	3	-160	+320	100	320

Output Signal: 20 to 100 kPa or 3 to 15 psi.

Ambient Temperature Limits:

-35 and +80=°C (-30 and +180°F). The vinyl covered portion of the capillary tubing must be in an area between -55 and +105°C (-65 and +220°F).

Supply Pressure: 140 kPa or 20 psi.

Performance Specifications

(12A and 12AS Series with range limits, spans, and sensitive lengths as noted by asterisks in Range Limits table.)

Accuracy (Includes linearity, hysteresis, and repeatability):
±0.5% of calibrated span.

Repeatability:
0.2% of calibrated span.

Step Response Time (Basic thermal system and agitated water bath):
Maximum of 12 seconds for a 90% recovery from a step change on a bare sensor and less than 2 seconds for a 63% recovery.

Physical Specifications

Body:
Die-cast, low copper aluminum alloy with baked gray vinyl finish.

Cover:
Blue, high impact, glass filled polycarbonate.

Environmental Protection:
The transmitter housing is weatherproof. It is dust-protected as defined in IEC IP53 and, with its constant air purging, provides the environmental protection of NEMA Type 3.

Thermal System:
SAMA (Scientific Apparatus Makers' Association) Class IIIB gas pressure system.

Connecting Tubing:
Vinyl covered AISI Type 302 stainless steel (302 ss) flexible armor over 316 ss capillary. The length is 1m (3.5 ft).

Bushings:
Fabricated of 316 ss and available with R1/2, R3/4, R1, G1/2B, G3/4B, G1B, 1/2 NPT, 3/4 NPT, or 1 NPT external thread and 1-18 NS internal thread. Bushing not required if temperature is well specified.

Adjustable Union Packing:
pTfe: For temperatures up to 205°C (400°F).

Graphite Impregnated Inconel Mesh: For maximum temperature of 540°C (1000°F).

Sensor:
Fitted with an adjustable union and bendable extension. The jam nut has an external 1-18 UNS thread. All process wetted parts are 316 ss except for the 12A-H Series, which has a sensor and bendable extension fabricated of Inconel. Also, the 12A-H Series has a fixed union.

Diameter (Y): 9.53 mm (0.375 in).

Sensitive Length (X): 75 or 150 mm (3 or 6 in).


Extension Length (J): 450 mm (18 in). the J dimension for the 12A-A Series must be long enough to limit the temperature of the capillary tubing to 105°C (220°F).

Insertion Length (U): 200 to 530 mm (8 to 21 in), adjustable.

Immersion Length (R): As specified.

Air Connections:
The supply and output connections are tapped for 1/4 NPT.

Plain Bendable Sensor with Adjustable Union:

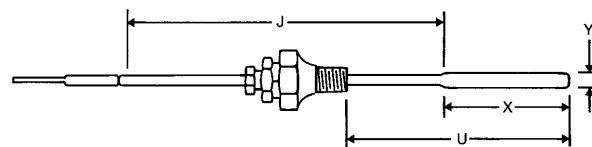

Optional Features

Air Supply Sets:
Available as fixed or adjustable filter regulators with or without gauges. Refer to Page 29.

Sausage Type Sensors:
For measurement of gas temperature in ducts or flues.

Thermowells:
For mechanical or corrosive protection. Refer to Page 37.

Derivative Unit:
Compensates for thermal lag in process.

Intermediate Spans:
Spans different from those listed in table under "FUNCTIONAL SPECIFICATIONS".

Optional Thermal System Configurations:
Other connection tubing, sensor types, and mounting

How to Order

1) SPECIFY MODEL NUMBER:

Transmitter with Basic Thermal System	
and Code 3542 Sensor	12A
Cryogenic Thermal System	
and Code 3542 Sensor	12A-C
High Temperature Thermal System	
and Code 3482 Sensor	12A-H
Sanitary Thermal System	
(see additional specifications below)	12AS

ADDITIONAL SPECIFICATIONS FOR 12AS SERIES SANITARY THERMAL SYSTEMS ONLY:

Sensor Code: 3242

Connector:

16A Bevel Seat	S1
16AMP Clamp Seat	S2
Type RJT	S3
Type ISS	S4
ISO Clamp Flange	S5
DIN Seat	S6

Nominal Line Size:

25 mm (1 in)	A
40mm(1 1/2in)	B
50 mm (2 in)	C
65mm(2 1/2in)	D
75 mm (3 in)	E
100 mm (4 in)	F

Sensor Sensitive Length (X):


75mm (3 in)	R
150 mm (6 in)	T

Capillary Tubing Length:

1 m (3.5 ft)	N
3 m (10 ft)	P

- 2) SPECIFY OUTPUT SIGNAL _____
- 3) SPECIFY RANGE LIMITS AND SPAN _____
- 4) SPECIFY CALIBRATED RANGE _____
- 5) SPECIFY SENSOR CODE _____
- 6) SPECIFY CONNECTING TUBING LENGTH _____
- 7) SPECIFY SENSOR DIMENSIONS _____
- A. Diameter (Y) [9.53 mm (0.375 in) standard] _____
- B. Length (X) [75 or 150 mm (3 or 6 in)—see Range Limits table] _____
- C. Extension length (J) [450 mm (18 in) standard] _____
- D. Insertion length (U) _____
- E. Immersion length (R) _____
- 8) SPECIFY BUSHING EXTERNAL THREAD (if required) _____
- 9) SPECIFY OPTIONAL FEATURES _____
- 10) SPECIFY INFORMATION FOR INSTRUMENT TAG AND APPLICATION _____

BYPASS MANIFOLDS

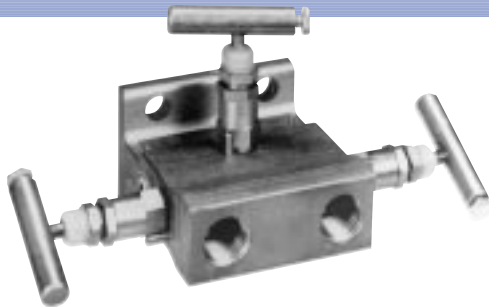


A variety of 3 and 5 valve manifolds is available for fast, convenient zero checks and adjustment of transmitters, and to isolate the transmitter from the process for maintenance.

AIR SUPPLY PRESSURE REGULATORS AND FILTERS (AIRSETS)




A broad selection of air pressure regulators, filters, and combination filter/regulators is available. They are used with pneumatic instruments requiring a regulated filtered air supply.

17BT, 17BS SERIES PNEUMATIC BUOYANCY TRANSMITTERS FOR LIQUID LEVEL MEASUREMENT

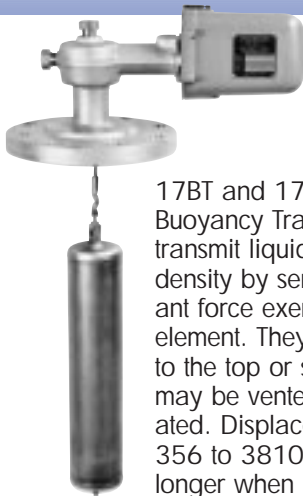

17BT and 17BS Series Pneumatic Buoyancy Transmitters measure and transmit liquid level interface level, or density by sensing changes in buoyant force exerted on a fixed displacer element. They can be flange mounted to the top or side of the vessel which may be vented, pressurized, or evacuated. Displacer lengths range from 356 to 3810 mm (14 to 150 in) or longer when required.

13R, 13RE SERIES PNEUMATIC REPEATERS FOR LIQUID LEVEL MEASUREMENT



13R, and 13RE Series Pneumatic Repeaters are used with level transmitters such as the 13F Series on closed, pressurized, or evacuated vessels to compensate for the effect of process pressure above the liquid. 13R and 13RE Series are suitable for vacuum and positive pressures to 240 kPa (35 psi). The 13RE Series has an extended diaphragm for high viscosity, clogging liquids.

45P SERIES PNEUMATIC INDICATING TRANSMITTERS



45P Series Pneumatic Indicating Deflection Type Transmitters measure pressure, temperature, differential pressure, or liquid level, depending on element selection, and transmit a proportional 20 to 100 kPa or 3 to 15 psi signal.

PRIMARY MEASUREMENT ELEMENTS

Using primary measurement elements, you can adapt many instruments to specific applications.

Foxboro makes elements for all types of measurements — flow, pressure, temperature, moisture, and humidity.

Orifice Plates and Flange Unions

Used with differential pressure meters to measure flow rate.

Pressure Seals

Ideal for measuring corrosive, viscous, or hot fluids.

Thermocouple/RTDs

Numerous configurations for use with transmitters, recorders, and controllers.

Thermowells

Protect thermocouples and RTDs from damaging process materials.

Dewcel Elements

The most accurate, reliable way to measure moisture and humidity.

These elements are designed for use with both pneumatic and electronic devices. With them, you can count on the high performance and dependability you expect from all Foxboro instruments.

ORIFICE PLATES AND FLANGE UNIONS

■ Proven Performance

- widely recognized as the industry standard.

■ Versatile

- works with either a d/p Cell Transmitter or a bellows meter.

■ Broad Choice of Sizes and Materials

- for just about any line size or application.

For complete specifications, refer to Product Specification Sheet PSS 3-5A1 A.

ORIFICE PLATES, FLANGE UNIONS



Orifice Plates are used with differential pressure meters to measure flow rate.

Orifice Plate Specifications

Material:

These plates conform to National Association of Corrosion Engineer's (NACE) Standard MR-01-75.

Flange Type Rating:

ANSI Class 150, 300, 400, or 600, as specified.

Bore:

Concentric, with sharp and square inlet edge. Plate is beveled if required by conformity specifications.

Nominal Plate Thickness:

4 mm (0.125 in) for 25 to 200 mm (1 to 8 in) pipe sizes, 7 mm (0.250 in) for 250 to 350 mm (10 to 14 in) pipe sizes, and 10 mm (0.375 in) for 400 to 500 mm (16 to 20 in) pipe sizes.

Legend:

Upstream side of tab handle marked "inlet" and with bore size and flange type/rating. Downstream side marked with trademark, material, and tag.

Conformity (Specifications and Computations):
Finish: Number 4 (45 microinch or better).

Dimensions:

Meet the intent of applicable portions of ASME "Fluid Meters" (Sixth Edition) and/or AGA Report 3 (1969), adopted as ANSI/API 2530.

Computations:

According to R.W. Miller's "Flow Measurement Engineering Handbook." This handbook is available from Foxboro. Refer to Part No. B0150YW.

Orifice Flange Union Specifications

Orifice Flange Unions are furnished in accordance with latest AGA and ASME code recommendations.

Construction:

Unions include 2 flanges, 2 jackbolts with nuts, 2 composition gaskets, 4 pipe plugs, and bolting.

Material:

Flanges: ASTM A-105 carbon steel, ASTM A-182 F304 ss, or ASTM A-182 F316 ss, as specified.

Bolting: With steel on stainless steel flanges; ASTM A193 Grade B7 alloy steel stud bolts with ASTM A194 Grade 2H nuts.

Pressure Tap Connections:

2 sets per union, 180 degrees apart. Class 300 and 600 unions are threaded for 1/2-inch pipe nipples. Class 900 and 1500 unions are threaded for 3/4-inch pipe nipples. The pressure tap hole diameter is: 6.35 mm (0.25 in) for 65 mm (2 1/2 in) pipe size and smaller, 9.53 mm (0.375 in) for 80 mm (3 in), and 12.7 mm (0.50 in) for 100 mm (4 in) pipe size and larger.

Optional Features

Reverse Flow:

For reverse flow applications, the plate is bored and finished equally on both faces and the bore is not beveled. The plate must be used with symmetrical taps.

Preparation for Nuclear, Oxygen, or Chlorine Service is Available.

Optional Orifice Bores:

Eccentric, segmental, or quadrant edge bore.

Materials of Construction:

Hastelloy C, Monel, Alloy 20, and titanium are available.

ORIFICE PLATES, FLANGE UNIONS

Optional Features (continued)

High Temperature and High Differential Pressure Operation:
The Orifice Plate may warp if the temperature of the process fluid exceeds 200°C (400°F) and the differential pressure (ΔP) is greater than 50 kPa (200 in H₂O). Refer to Foxboro for determination of the plate thickness for these conditions.

Drain or Vent Hole:
Plate drilled with recommended maximum diameter hole to applicable standard.

Other materials of construction, flange ratings, plate thickness, and line size are available.

How to Order

1) SPECIFY ORIFICE PLATE CODE:

Plate, Foxboro Tab Type	SERIES 120	-	-
Material: ASTM A-240 Type	SERIES 120		
304 ss		.304	
316 ss		.316	
For use with Flange Type Rating: ANSI Class			
150			.150
300			.300
400			.400
600			.600

2) SPECIFY NOMINAL LINE (PIPE) SIZE AND SCHEDULE NUMBER

3) SPECIFY ORIFICE DIAMETER OR SUPPLY COMPLETED FLOW DATA SHEET

(Refer to Foxboro)

4) SPECIFY OPTIONAL FEATURES

5) SPECIFY INFORMATION FOR IDENTIFICATION TAG

1) SPECIFY FLANGE UNION CODE:

Style:				
Slip-On	FU-S			
Threaded	FU-T			
Welding-Neck	FU-W			
Flange Facing:				
Raised Face	RF			
Ring Joint (Not available with FU-T)	RJ			
Material:				
ASTM A-105 Carbon steel			CS	
ASTM A-182 F304 ss			.304	
ASTM A-182 F316 ss			.316	
ANSI Rating:				
Class 300				.300
Class 600 (Not available with FU-T)				.600
Class 900 (Not available with FU-T)				.900
Class 1500 (Not available with FU-T)				.1500

2) SPECIFY NOMINAL LINE (PIPE) SIZE

3) SPECIFY PIPE SCHEDULE NUMBER OR ACTUAL INTERNAL DIAMETER FOR WELDING-NECK TYPE UNIONS


4) SPECIFY OPTIONAL FEATURES

5) FOR DIFFERENTIAL PRESSURE TRANSMITTER, REFER TO: Page 5.

IFOA SERIES INTEGRAL FLOW ORIFICE ASSEMBLIES

IFOA

- The IFOA has very high accuracy when equipped with associated piping
- The IFOA can be used with any differential pressure transmitter having standard process connections
- Process wetted materials are available for use with both corrosive and noncorrosive fluids
- The transmitter can be either integrally coupled or remotely connected
- Process wetted material meets NACE Standard MR-01-75

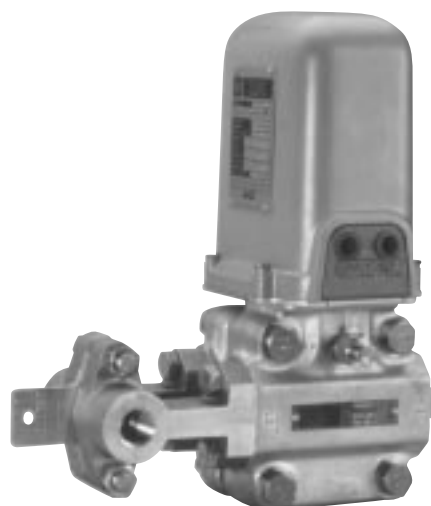

The IFOA Series Integral Flow Orifice Assemblies adapt electronic and/or pneumatic d/p Cell Transmitters for measuring small flow rates.

For complete specifications, refer to Product Specification Sheet PSS 3-5A1 B.

Specifications

Assemblies with Associated Piping:

Body Material:

Cast AISI Type 316 ss ASTM A351 Grade CF-8M stainless steel.

Piping Material:

Seamless stainless alloy steel pipe to ASTM A-312 Grade TP-316, Schedule 40 for the 15 and 25 mm (1/2 and 1 in) sizes, Schedule 80 for the 40 mm (1 1/2 in) size.

Both Types:

Static Pressure Rating and Process Temperature Limits:

Flange Material:

Forged 316 ss ASTM A182-F316.

Assemblies without Associated Piping:

Body Material:

Cast AISI Type 316 ss ASTM A351 Grade CF-8M stainless steel or cast Hastelloy C Grade CW-2M per ASTM A494/A494M-86, as specified.

End Connection	Assembly Size		Static Pressure Rating and Process Temperature Limits (a)	
	mm	in	SI Units	U.S.Units
WELD ENDS	15	1/2	20 MPa from -40 to +40°C 16 MPa at 150°C	3000 psi from -40 to +100°F 2300 psi at 300°F
	25	1	14 MPa from -40 to +40°C 10.5 MPa at 150°C	2000 psi from -40 to +100°F 1550 psi at 300°F
	40	1 1/2	5 MPa from -40 to +40°C 4 MPa at 150°C	750 psi from -40 to +100°F 580 psi at 300°F
THREADED ENDS	15 & 25	1/2 & 1	10 MPa from -40 to +150°C	1500 psi from -40 to +300°F
	40	1 1/2	5 MPa from -40 to +40°C 4 MPa at 150°C	750 psi from -40 to +100°F 580 psi at 300°F
FLANGED ENDS (b)	All sizes		Static Pressure Rating of Flange Selected	

a) Process temperature limits are -40 and +150°C (-40 and +300°F). Transmitter temperature limitations must be observed when integrally mounted to IFOA assembly. For higher pressures and temperatures, refer to Foxboro.

b) Available with associated piping only.

How to Order (continued)

1) SPECIFY MODEL NUMBER (continued): IFOA

Orifice Bore Diameter: Nominal Size 15 mm (1/2 in):

0.508 mm (0.020 in)	A
0.889 mm (0.035 in)	B
1.524 mm (0.060 in)	C
2.540 mm (0.100 in)	D
4.064 mm (0.160 in)	E
6.350 mm (0.250 in)	F
8.890 mm (0.350 in)	G
Jewel orifice. 316 ss base material. 0.0508 to 0.381 mm (0.002 to 0.015 in)	U
Nonstandard within beta limits of 0.1 to 0.8	V

Orifice Bore Diameter: Nominal Size 25 mm (1 in):

6.147 mm (0.242 in)	H
8.661 mm (0.341 in)	J
12.14 mm (0.478 in)	K
16.64 mm (0.655 in)	L
21.13 mm (0.832 in)	M
Nonstandard within beta limits of 0.1 to 0.8	V

Orifice Bore Diameter: Nominal Size 40 mm (1 1/2 in):

9.703 mm (0.382 in)	N
13.67 mm (0.538 in)	P
19.08 mm (0.751 in)	R
25.86 mm (1.018 in)	S
29.97 mm (1.180 in)	T
Nonstandard within beta limits of 0.1 to 0.8	V

Optional Connectors: For remote mounting d/p Cell Transmitter:


316ss, 1/2NPT	1S
316 ss, R1/2	2S
Hastelloy C, 1/2 NPT	1H
Hastelloy C, R1/2	2H

2) SPECIFY ORIFICE BORE DIAMETER OR SUPPLY COMPLETED FLOW DATA SHEETS
(Refer to Foxboro) FOR NONSTANDARD OR JEWEL ORIFICES

3) SPECIFY OPTIONAL FEATURES

4) SPECIFY INFORMATION FOR INSTRUMENT TAG

DIAPHRAGM PRESSURE SEALS

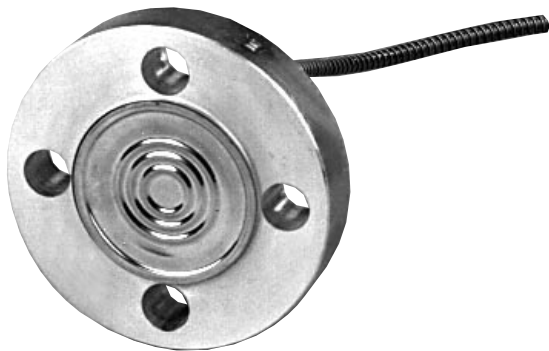






Diaphragm Pressure Seals are for connection to pressure instruments— to isolate the process from the instrument and piping.

DIAPHRAGM PRESSURE SEALS

- Foxboro offers a comprehensive line of Diaphragm Pressure Seals. These seals are used to separate pressure instruments from process fluids
- Separation is required if the process:
 - is corrosive.
 - is viscous enough to clog.
 - contains suspended solids.
 - could freeze or solidify.
 - is toxic.
 - requires sanitary handling.
- Diaphragm Pressure Seals are available in a wide range of designs and materials

For complete specifications, refer to Product Specification Sheet PSS 3-2C1 A.

Diaphragm Pressure Seals

Selection	Description	Illustrations and AS References (a)
THREAD ATTACHED	Process Connection: PES-SB: 1/4,1/2, 3/4,1,1 1/4, or 1 1/2 NPT PES-SG: 1/4,1/2,3/4, or 1 NPT Operating Pressure: Maximum working pressure: 0 to 17.5 MPa (0 to 2500 psi).	 As IllustratedAS Reference PES-SB With 1/4-inch flushing connection.....AS Reference PES-SG
FLANGE ATTACHED	Process Connection: ANSI raised face flange. Operating Pressure: Maximum working pressure: Governed by flange rating.	 As IllustratedAS Reference PES-SC With 1 /4-inch flushing connectionAS Reference PES-SD
IN-LINE FLOW-THROUGH	Process Connection: Welded to process line. Operating Pressures: Maximum working pressure: Governed by user's weld, 0 to 10.5 MPa at 38 C (0 to 1500 psi at 100°F).	  80 mm (3 in) line only100 mm (4 in) line & larger As Illustrated.....AS Reference PES-SJ  As IllustratedAS Reference PES-SM

a) Other types available. Wetted parts materials available: Steel, AISI Types 304 and 316 ss, Carpenter 20, Monel, nickel, titanium, Hastelloy B and C, PVC,polypropylene, pife, and Inconel.

THERMOWELLS

- **Rigid material, concentricity specifications, and individual hydrostatic testing assures maximum soundness and highest quality.**
- **Connections:**
 - Flanged (ANSI and ISO): Variety of sizes and pressure ratings.
 - Threaded (metric and NPT): R1/2, R3/4, and R1 (1/2, 3/4, and 1 NPT) .
- **Type:**
 - Drilled construction, welded construction, plain, with lagging, sanitary, straight, tapered, restricted tip.

- **Materials:**

Brass	347 ss	316L ss
Carpenter 20 Cb-3	F11 Alloy Steel	Aluminum
C1018 Carbon Steel	F22 Alloy Steel	Copper
R-Monel 405	Hastelloy B	K-Monel
304 ss (standard)	Hastelloy C 276	309 ss
304 Low Carbon (304L) ss	Inconel 600	310 ss
316 ss (standard)	Nickel 200	410 ss
	Titanium	446 ss

THERMOWELLS AND DEWCEL



Foxboro Thermowells separate the temperature measuring sensitive portion of an RTD, Thermocouple, or Filled Thermal System from a potentially corrosive or damaging process media. These wells permit ready removal of the sensor without process shutdown.

DEW POINT MEASUREMENT SYSTEM — DEWCEL

- **The DEWCEL System provides a direct reading of absolute humidity in ambient temperature between -45 and +105°C (-50 and +220°F).**

When connected to a temperature measurement device, the DEWCEL System measures absolute humidity. By means of appropriate tables, the temperature can be converted to dew point, percent water vapor, parts per million, or other units of absolute moisture. In practice, the conversion is accomplished in recorder chart layouts, characterized amplifiers, or computer programs.

- **Accuracy:** $\pm 0.8^{\circ}\text{C}$ ($\pm 1.5^{\circ}\text{F}$) at 32°C (90°F) dew point (not including temperature sensor tolerances).
- **Dew Point Range Limits:** -45 and $+60^{\circ}\text{C}$ (-50 and $+140^{\circ}\text{F}$).
- **Relative Humidity Limits:** 12 and 100% relative humidity.
- **Pressure Rating:** Zero Pa absolute to 865 kPa gauge (zero psia to 125 psig).



The DEWCEL is used with RTD, thermocouple, or filled thermal system temperature measuring equipment.

LARGE CASE INSTRUMENTS

Foxboro large case instruments have been on the job for years in process plants around the world.

These versatile instruments fit a wide range of applications. There's a unit for just about every process function:

- **Recording**
- **Indicating**
- **Controlling**
- **Totalizing**
- **Transmitting**

And they are available with a selection of measurement elements:

- **Flow**
- **Pressure**
- **Humidity**
- **Temperature**
- **Servo Elements for RTDs/Thermocouples and other Electrical Inputs**

You can also choose from an extensive list of options such as electrical contacts, integrators, batch controls, pen types, control modes—and numerous other features.

Foxboro large case instruments can be field mounted on pipe stands, in panels, or on flush surfaces. And their durable housings are resistant to moisture, corrosion, and damaging environments.

Their dependability is legendary. That's why process engineers specify them time and again.

40P, 40M SERIES RECORDING AND INDICATING PNEUMATIC CONTROLLERS

40P, 40M

- **Precise Control**
- **Chart Records or Indication**
- **weatherproof Construction (40P):**
NEMA Type 3
- **Wide Selection of Measuring Elements**
- **Versatile Mounting: Surface, Panel, or Pipe Mounting**

For complete specifications, refer to Product Specification Sheets PSS 3-1A1 A and 3-1A2 A, B, C, and F.



The 40P, 40M Series Recording and Indicating Pneumatic Controllers receive a mechanical input from an integrally mounted measuring element, compare it to a set point, and produce a pneumatic output signal.

Functional Specifications

Control Modes:

See "HOW TO ORDER."

Measurement Elements:

See "HOW TO ORDER."

Controller Action:

The output signal either increases or decreases with increasing measurement, as specified.

Output Signal:

See "HOW TO ORDER."

Supply Pressure:

140 kPa (20 psi, 1.4 bar or kg/cm²).

Single Action:

One control unit per 40P or 40M case. Dual, duplex, and auto-selector versions are also available.

Recorder Chart Drives:

Electrical: The standard speed is 1 revolution per 24 hours for nominal 120 or 240 V, 50 or 60 Hz, as specified.

Mechanical: The standard speed is 1 revolution per 24 hours with a 24-hour movement.

Battery Operated: 11 Speed

Recorder Pens:

Fiber tip disposable or box.

Physical Specifications

Enclosure:

40P Series: The case and door are glass-fiber reinforced polyester moldings, compounded for superior corrosion resistance. The overall construction provides the environmental protection of IEC IP53 and NEMA Type 3.

40M Series:

Durable, die-cast aluminum case and door with corrosion-resistant vinyl finish.

Mounting:

Standard mounting is flush in a panel up to 16 mm (0.6 in) thick or on a surface. A kit of parts for vertical mounting on a DN 50 or 2 in pipe is available (40P Series only).

Expendable Accessories:

Charts: 100 HUMITEX nominal 300 mm (12 in) circular charts [nominal 100 mm (4 in) calibrated scale] are supplied with each instrument.

Ink:

1 U.S. fl oz (30 cm³) is supplied for each box type pen.

40P, 40M

Performance Specifications

Accuracy:
See Measurement Element selected.

Repeatability:
0.25% of calibrated span.

Optional Features

Integrators:
To totalize flow. Refer to Page 61.

Transmitters:
To transmit measurement.

Pneumatic Set:
For remote set point adjustment.

External Manual Set Point Knob.

Ratio:
Maintains ratio between uncontrolled and controlled variable.

Batch:
For batch control.

Type 70 Contacts:
For electrical contact output. Refer to Page 61.

External Connection to Integral Bellows.

How to Order

1) SPECIFY MODEL NUMBER:
40P or 40M

Function:	-	A	-	-	-	-	-	-	/
Recording.....		R							
Indicating.....		N							
Action:									
Single (One control unit actuated by one measuring element. Control will apply to first listed element.).....		A							
Control:									
On/Off			1						
Full proportional 0.5 to 200%			2						
Full proportional plus derivative 0.01 to 50 minutes			3						
Full proportional plus integral (reset) 0.01 to 50 minutes per repeat.			4						
Full proportional plus integral (reset) plus derivative			5						
Narrow band proportional 0.5 to 25% or 1.0 to 50%			6						
Automatic/Manual Internal Transfer Switching:									
Without internal regulator, without transfer switch (a).....			J						
2-position nozzle seal switch (b)			L						
Balanceable automatic/manual unit - right (b).....			N						
Balanceable automatic/manual unit - left (b).....			P						
Output Signal and Gauge:									
20 to 100 kPa signal, 150 kPa gauge				5					
3 to 15 psi signal, 22 psi gauge				2					
0.2 to 1.0 bar signal, 1.5 bar gauge				6					
0.2 to 1.0 kg/cm ² signal, 1.5 kg/cm ² gauge				4					
Mounting:									
Flush (c).....						F			
Pipe (c), (d).....						P			
Surface (c).....						S			
Yoke. 40P Series available with Type 37 Element only						Y			

(a) Available with Control code 1 only. (b) Not available with Control code 1. (c) Not available with 40P Series with Type 37 Element. (d) Not available with 40M Series.

How to Order (continued)

1) SPECIFY MODEL NUMBER:

40P or 40M

Chart Drive or Scale:

Electrical - 24 h rotation, 120 V, 60 Hz (options available).....E
 Mechanical - 24 h rotation and wind (options available).....M
 SectorN

Pens or Pointers:

1 pen or pointer.....1
 2 pens or pointers.....2
 3 pens3

Pen Type or Scale Type:

Fiber tip disposable.....F
 BoxB
 Single range scale.....S
 Double range scale.....D

Elements: (Refer to Pages 52-60 for Element Descriptions)

Type 37 (a).....DE-A, B
 Absolute pressure bellows.....PA-CA
 Receiver.....PC
 Absolute pressure double spiral.....PA-MA
 Double spiral.....PB-MC
 Pressure helical.....PB-M
 Pressure spiral.....PB-BA
 Pressure bellows.....PB-CA, CC
 Diaphragm.....PB-DF, PF
 Stainless long helical.....PBGA
 High pressure helical (b).....PB-KA
 Temperature.....TA-1A, 1B,
 2A, 2B, 3B
 Electronic servo.....E

(a) Only one per instrument. (b) Not available with 40P Series.

2) SPECIFY MEASUREMENT RANGE _____

3) SPECIFY CONTROLLER ACTION _____

4) SPECIFY OPTIONAL FEATURES _____

5) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

43AP



The 43AP Series Pneumatic Indicating Controllers continuously indicate and control pressure, vacuum, temperature, or flow.

43AP SERIES PNEUMATIC INDICATING CONTROLLERS

- **Wide Selection of Direct Connected Measurement Elements**
- **Broad Choice of Control Modes**
 - On/off, proportional, proportional plus derivative, proportional plus integral (reset), proportional plus integral (reset) plus derivative, differential gap, and automatic shutdown.
- **Internal Bumpless Auto/Manual Transfer**
 - Smooth internal switching.
- **Weatherproof**
 - Glass-fiber reinforced case, gasketed door.
 - NEMA Type 3 protection.
- **Accuracy Unaffected by Mounting**
 - Measurement element and control unit mounted on rigid steel plate.

For complete specifications, refer to Product Specification Sheet PSS 3-1B3 A.

Functional Specifications

Control Modes:

See "HOW TO ORDER."

Measurement Elements:

See "HOW TO ORDER."

Output Gauge:

0 to 200 kPa, 0 to 30 psi, or 0 to 2 bar or kg/cm², as specified.

Set Point Adjustment:

By means of a knob mounted inside the case.

Controller Action:

Output signal either increases or decreases with increasing measurement, as specified; action is reversible in the field.

Supply Pressure:

140 kPa, 20 psi, 1.4 bar or kg/cm².

Output Signal:

See "HOW TO ORDER."

Ambient Temperature Limits:

-40 and +80°C (-40 and +180°F).

Performance Specifications

Accuracy (When used with the elements as listed

under "HOW TO ORDER"): $\pm 0.5\%$ of calibrated span.

Repeatability:

0.2% of calibrated span.

Physical Specifications

Mounting:

Panel, surface, pipe, or yoke. Panel: Flush in a panel up to 16 mm (0.6 in) thick.

Surface: suitable for all controllers having internally mounted elements. This mounting is not available with heavy duty helical elements. (These elements extend through the back of the case.)

Pipe: a kit of parts to fit a DN 50 or 2 in vertical pipe.

Yoke: a kit of parts to fit a vertical DN 50 or 2 in pipe stub. This mounting scheme is designed specifically for controllers having rear mounted differential pressure elements.

Physical Specifications (continued)

Enclosure:

The case and door are glass-fiber reinforced polyester moldings, compounded for superior corrosion resistance. The door has a shatterproof polycarbonate window, ultraviolet-resistant. The overall construction is weatherproof, meets IEC IP53, and provides the environmental protection of NEMA Type 3.

Scale:

Black markings on a white background, sector-shaped with nominal effective length of 150 mm (6 in). Refer to Chart and Dial Catalog 600 for available ranges.

Optional Features

Integral Air Supply Set.**Type 70 Contacts:**

For electrical contact output. Refer to Page 61.

Control Valve Mounting.**External Connection to Integral (Reset) Bellows (ECRB) .****External Set Point.****Batch:**

For batch control.

Vent Connection.**External Phenolic Nameplate.****Glass Window in Door.****Stainless Steel Data Plate.****Tamperproof Door Knob.****Hi-Lo Shutdown Operator.****External Subpanel for Automatic/Manual Switching:**

For controllers without internal switch.

How to Order

1) SPECIFY MODEL NUMBER: 43AP-**Mounting:**

Field (pipe or yoke)F
Panel or surfaceP

Control:

On/OffA1
Proportional 4 to 400%A2
Proportional plus derivative 0.05 to 50 minutesA3
Proportional plus integral (reset) 0.01 to 50 minutes per repeat.....A4
Proportional plus integral (reset) plus derivativeA5
Differential gap 1 to 100%A7
Automatic shutdownA8

Output Signal and Gauge:

20 to 100 kPa signal, 200 kPa gauge5
3 to 15 psi signal, 30 psi gauge2
0.2 to 1.0 bar signal, 2 bar gauge6
0.2 to 1.0 kg/cm² signal, 2 kg/cm² gauge4

Automatic/Manual Internal Transfer Switching:

NoneN
Bumpless with 2-position switch, balance gauge, regulatorC
2-position nozzle seal switch for manual controlD

Optional Suffix:

Remote pneumatic set point (not available with pressure element codes
PA-CA, PA-CC, PB-CA, PB-GA, PB-PF; servo element code E;
Type 70 Contacts; or options ECRB and "BATCH")P

How to Order (continued)

1) SPECIFY MODEL NUMBER: 43AP-

— — — — - — /

Elements: (Refer to Pages 52 to 60 for Element Descriptions)

Type 37 (43AP-F only)	DE-A, B
Absolute pressure bellows	PA-CA, CC
Absolute pressure double spiral	PA-MA
Pressure helical	PB-AA
Pressure spiral	PB-BA
Pressure bellows	PB-CA, CC
Diaphragm	PB-DF, PF
Stainless long helical (43AP-F only)	PB-GA
Receiver	PC
Temperature	TA-1A, 2A, 2B, 3B
Electronic servo	E

2) SPECIFY CONTROLLER ACTION

3) SPECIFY OPTIONAL FEATURES

4) SPECIFY INFORMATION FOR INSTRUMENT TAG AND APPLICATION

40P, 40M SERIES RECORDERS AND INDICATORS

40P, 40M

- **Wide Selection of Measuring Elements**
- **Versatile Mounting: Surface, Panel, or Pipe Mounting**
- **Choice of Circular Chart Recorder or either Concentric or Sector Scale Indicator**
- **Weatherproof Construction (40P Series): NEMA Type 3**

For complete specifications, refer to Product Specification Sheets PSS 3-1A1 A and 3-1A2 A, B, C, and E.



The 40P and 40M Series Instruments continuously record or indicate measurement of one or more process variables.

Functional Specifications

Measurement Elements:
See "HOW TO ORDER."

Battery Operated:
11 speed.

Recorder Chart Drives:
Electrical: The standard speed is 1 revolution per 24 hours for nominal 120 or 240 V, 50 or 60 Hz, as specified.

Ambient Temperature Limits:
-30 and +60°C (-20 and +140°F).

Mechanical: The standard speed is 1 revolution per 24 hours with a 24-hour movement.

Recorder Pens:
Fiber tip disposable or box.

Performance Specifications

See Measurement Element selected.

Physical Specifications

Enclosure:
40P Series: The case and door are glass-fiber reinforced polyester moldings, compounded for superior corrosion resistance. The door has a shatterproof glass window. The overall construction provides the environmental protection of IEC IP53 and NEMA Type 3.

40M Series: Durable, die-cast aluminum case and door with corrosion-resistant epoxy powder finish.

Mounting:
Standard mounting is flush in a panel up to 16 mm (0.6 in) thick or on a wall. A kit of parts for vertical mounting on a DN 50 or 2 in pipe is available as an option (40P Series only).

Cardboard Nameplate:
A cardboard nameplate is supplied for displaying the chart factor.

Expendable Accessories:
Charts: 100 HUMITEX nominal 300 mm (12 in) circular charts [nominal 100 mm (4 in) calibrated scale] are supplied with each instrument.

Ink:
1 U.S. fl oz (30 cm³) is supplied for each box pen.

Indicator Pointer:
Sector indicators have an orange pointer and concentric indicators have a black pointer.

Indicator Scales:
Black markings on white background. Refer to Chart and Dial Catalog 600 for available ranges.

Sector:
The effective length is 171 mm (6.75 in).

Concentric:
The effective length is 594 mm (23.4 in).

40P, 40M

Optional Features

- Incandescent Type Internal Illumination.

Bakelite Nameplate.

Flush Door Lock.

Segmental Indicating Scale.
- Indicating Scale Transparent Mounted in Instrument Door.

Plexiglass Circular Disc.

Portable Mounting.

How to Order

1) SPECIFY MODEL NUMBER: 40P or 40M-

Function:

- Circular Chart RecorderR

Sector Scale Indicator.....N

Concentric Scale Indicator.....K

Internal Mechanism:

- Recorder - standardR

Indicator- sectorN

Indicator - concentricK

With Type 70 Contacts (recorder or indicator)E

Mounting:

- Flush (a)F

Pipe (a), (b)P

Surface (a)S

Yoke. 40P Series available with Type 37 Element only.....Y

Chart Drive or Scale:

- Electrical, 24 h rotation, 120 V, 60 Hz (options available)E

Mechanical, 24 h rotation and wind (options available)M

Sector scale.....N

Concentric scale.....K

Battery operated (11 speed).....XX

Pens or Pointers:

- 1 pen (R) or 1 pointer (N or K)1

2 pens (R) or 2 pointers (N).....2

3 pens (R)3

4 pens (R)4

Pen Type or Scale Type:

- Fiber tip disposable.....F

BoxB

Single range scaleS

Dual range scale. For 40PN and 40MN Series only.....D

(a) Not available with 40P Series with Type 37 Element. (b) Not available with 40M Series.

HOW TO ORDER Continued on Next Page.

How to Order (continued)

1) SPECIFY MODEL NUMBER: 40P or 40M- _____

Elements: (Refer to Pages 52 to 60 for Element Descriptions)

Type 37 (yoke mounting only) (a)	DE-A, B
Absolute pressure bellows	PA-CA
Receiver	PC
Absolute pressure double spiral	PA-MA
Doublespiral	PB-MC
Pressure helical	PB-M
Pressure spiral	PB-BA
Pressure bellows	PB-CA, CC
Diaphragm	PB-DF, PF
Stainless long helical	PB-GA
Temperature	TA-1A, 1B, 2A, 2B, 3B
Electronic servo	E
Relative humidity (b)	MA-K

(a) Only one per instrument.

(b) Not available with 40P Series.

2) SPECIFY OPTIONAL FEATURES _____

3) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

Large Case Instruments (Recorders and Controllers)

39AF, 43APG



39AF Series Recorders provide a highly accurate circular chart record of flow, pressure, and temperature.
43APG Series Controllers provide precise indication and control of flow, pressure, vacuum, and temperature.

OIL AND GAS INDUSTRY FLOW RECORDERS AND CONTROLLERS

- **39AF Series Recorders:**
 - Wetted parts comply with NACE MR-01 -75.
 - High accuracy.
 - Choice of Foxboro 45° angular pen travel or industry standard 22.5°.
- **43APG Series Controllers:**
 - NACE compliant element materials available.
 - Low air consumption and internal corrosion resistance means the 43APG can be operated directly from the process gas.
 - Wide choice of measurement elements.
- **Glass-fiber reinforced case with gasketed door provides NEMA Type 3 protection.**

For complete specifications, refer to Product Specification Sheets PSS 7-3C3 A and B.

Functional Specifications

Measurement Elements and Configurations:
See "HOW TO ORDER."

Controller Output Signal and Supply Pressure:

Output Signal	Supply Pressure
20 to 100 kPa (a)	140 kPa (a)
3 to 15 psi	20 psi
0.2 to 1.0 bar or kg/cm ² (a)	1.4 bar or kg/cm ² (a)

(a) Not applicable to the 43APG Series Controllers.

Chart Drives:
Mechanical, electrical, or battery operated.

Recorder Pens:
Fiber tip disposable, or box, as specified.

WARNING:
EXPLOSION HAZARD CAN RESULT FROM USE OF NATURAL GAS AS SUPPLY. INSTRUMENT LOCATION MUST BE PROPERLY CLASSIFIED PER NFPA-70. TOXICITY HAZARD CAN RESULT FROM USE OF SUPPLY GAS CONTAINING HYDROGEN SULFIDE (H₂S). AREA MUST BE VENTILATED OR BREATHING APPARATUS USED. REFER TO MI 011-111.

Performance Specifications

Recorder Accuracy:
Zero-based spans 12.5 kPa, 50 inH₂O, 125 mbar ΔP and greater: ±0.25% of span.

Spans less than 12.5 kPa, 50 inH₂O, 125 mbar ΔP and all compound ranges: ±0.50% of span.

Controller (less element) Accuracy:
Repeatability: Less than 0.2% of span.

Dead Band: Less than 0.1 % of span.

Hysteresis: ±1 % of output span.

Physical Specifications

Door:

Hinged, glass-fiber reinforced phenylene oxide molding with blue polyurethane finish. The clear polycarbonate window is ultraviolet-resistant and shatter-proof.

Case:

Glass-fiber reinforced, gray polyester molding.

Enclosure Classification:

Meets IEC IP53 and provides the environmental protection of NEMA Type 3.

Optional Features

Refer to Foxboro.

How to Order

1) SPECIFY MODEL NUMBER: 39-
Pen Travel:

Foxboro standard 45° angular pen travelAF

Number of Pens:

1 Pen: FlowR
 2 Pens: Flow and PressurePR
 3 Pens: Flow, Pressure, and TemperaturePTR

Differential Pressure Range:

kPa	inH ₂ O	mbar	
0 to 5	0 to 20	0 to 50B
0 to 12.5	0 to 50	0 to 125E
0 to 25	0 to 100	0 to 250G
0 to 50	0 to 200	0 to 500J
-2.5 to +2.5	-10 to +10	-25 to +25P
-6.2 to +6.2	-25 to +25	-62 to +62Q
-12.5 to +12.5	-50 to +50	-125 to +125R
-25 to +25	-100 to +100	-250 to +250S
Intermediate	Intermediate	IntermediateZ

K-Monel Pressure Element: For 39AFPR and 39AFPTR only.

For 39AFPR and 39AFPTR only:

Element	Upper Range Limit (a)			
	MPa	psi	bar or kg/cm ²	
Spiral	0.14 to 0.34	20 to 50	1.4 to 3.4A
	0.35 to 0.69	51 to 100	3.5 to 6.9C
	0.7 to 1.4	101 to 200	7 to 14D
Helical	1.72 to 2.0	250 to 300	17.2 to 20.7F
	2.1 to 2.75	301 to 400	21 to 27.5H
	2.75 to 6.20	401 to 900	27.5 to 62K
	6.2 to 14	901 to 2000	62 to 140L

(a) Lower range limit is 0.

HOW TO ORDER Continued on Next Page.

39AF, 43APG

How to Order (continued)

1) SPECIFY MODEL NUMBER: 39-

AF - - - - -

Temperature Element (for 39AFPTR only): Standard
Class 1A filled thermal system with 4.5 m (15 ft) of capillaryZ

Chart Drive:

- Electrical; 24 h rotation; 120 V, 60 Hz or 220 V, 50 Hz, as specified1E
- Electrical; otherXE
- Mechanical, 24 h rotation and 7 d wind1M
- Mechanical, 24 h rotation and 7 d wind with Mullins Chart Changer1C
- Mechanical; 24 h rotation and 3 d wind, 7 d rotation and 31 d wind, or
8 d rotation and 31 d wind, as specified; with Mullins Chart ChangerXC
- Mechanical; otherXM
- Battery Operated (11 speed)XX

Pen Type:

- Fiber tip disposableF
- BoxB

2) SPECIFY MEASUREMENT RANGES (FLOW, PRESSURE, AND TEMPERATURE),
IF APPLICABLE _____

3) SPECIFY THERMOWELL, IF REQUIRED (SEE PAGE 37) _____

4) SPECIFY CHART NUMBER (SEE CHART AND DIAL CATALOG 600 OR REFER
TO FOXBORO) _____

5) SPECIFY SUPPLY VOLTAGE AND FREQUENCY FOR CHART DRIVE CODES
1E AND XE; ROTATION AND WIND FOR XC AND XM _____

6) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

HOW TO ORDER Continued on Next Page.

How to Order (continued)

1) SPECIFY MODEL NUMBER: 43APG-

Mounting:

FieldF
Panel or Surface.....P

Control:

On-OffA1
Proportional 4 to 400%A2
Proportional plus Derivative 0.05 to 50 minutes.....A3
Proportional plus Reset (Integral) 0.01 to 50 minutes per repeat.....A4
Proportional plus Integral plus DerivativeA5
Differential Gap 1 to 100%.....A7

Output Signal and Gauge:

3 to 15 psi signal, 30 psi gauge.....2

Automatic/Manual Internal Transfer Switching:

Bumpless with 2-position switch, balance gauge, regulatorC
2-position nozzle seal switch for manual controlD
NoneN

Optional Suffix:

Remote Pneumatic Set Point (not available with element code
PA-CA, PA-CC, PB-PF, or PB-GA)P

Element: (Select one, refer to Pages 52 to 60 for Element Descriptions)

Type 37 (43APG-F only)DE-A (a), B
Absolute pressure bellowsPA-CA, CC
ReceiverPC-OC
Absolute pressure double spiralPA-MA
Pressure helical.....PB-M, AM (b)
Pressure spiral.....PB-BA, BM (b)
Pressure bellows.....PB-CA, CC
Diaphragm.....PB-DF, PF
Stainless long helical (43APG-F only)PB-GA
Temperature (c)TA-1A, 1B,
2A, 2B, 3B

(a) Available in NACE compliant version.

(b) Element codes PB-AM and PB-BM comply with NACE Standard MR-01-75.

(c) Available with AISI Type 316 stainless steel tubing only.

2) SPECIFY SCALE FROM CHART AND DIAL CATALOG 600 OR REFER TO

FOXBORO _____

3) SPECIFY CALIBRATED RANGE _____

4) SPECIFY CONTROL ACTION (FIELD REVERSIBLE) _____

5) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

37



Type 37 Diaphragm Differential Pressure Elements translate differential pressure to angular shaft position.

TYPE 37 DIAPHRAGM DIFFERENTIAL PRESSURE ELEMENT

- Ideal for Liquid, Gas, and Steam Flow Measurement
- No Mercury Used: Safe Operation
- Ambient Temperature Compensation
- Overrange Protection
- Requires No Power for Operation

For complete specifications, refer to Product Specification Sheet PSS 3-4A2 A.

Functional Specifications

Spans:

Available between 5 and 50 kPa or 20 and 200 inH₂O.

Standard Differential Pressure Ranges:

0 to 5, 0 to 12.5, 0 to 25, and 0 to 50 kPa; or 0 to 20, 0 to 50, 0 to 100, and 0 to 200 inH₂O ΔP.

Maximum Process Pressure:

14 MPa (2000 psi).


Ambient Temperature Limits:

-34 and +110°C (-30 and +230°F).

PRESSURE MEASURING ELEMENTS

- Wide variety of element types, materials, and pressure ranges
- Durable and dependable for long service life

For complete specifications, refer to Product Specification Sheet PSS 3-2A1 A.

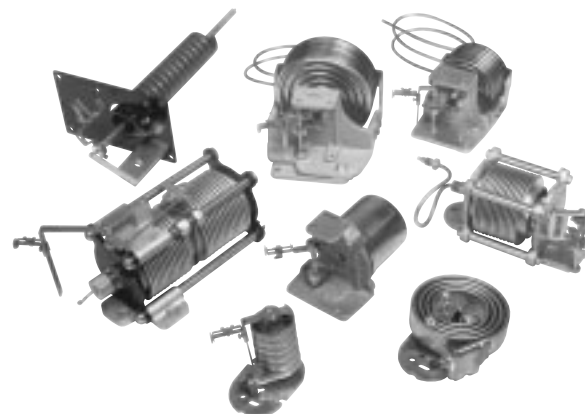

PRESSURE MEASURING ELEMENTS

Pressure Measuring Elements measure gauge and absolute pressure and actuate recorders, indicators, controllers, and transmitters.

Performance Specifications

Accuracy:
Better than $\pm 0.5\%$.

Physical Specifications

Element Materials:
AISI Type 316 ss (316 ss).
Bronze or Brass.

Copper-Nickel-Manganese (Cu-Ni-Mn) Alloy.
K-Monel.

Optional Features

Overrange Protection, Underrange Protection:
Provides protection to the linkage and pointer, not the pressure element.

Oxygen Service Preparation:
Available for 316 ss spirals and 316 ss helicals. Copper bearing brazing material will be in contact with process.

Large Case Instruments (Elements)

PRESSURE MEASURING ELEMENTS

How to Order

1) SPECIFY ELEMENT CODE:

Element		Normal Recorder Measurement Ranges (Torque Factor rating 30)		
Type	Material	kPa	psi,psia	
Receiver (Bellows)	Brass	80 kPa	12 psiPC (a)
		100 kPa	15 psi	
		—	24 psi	
Diaphragm 75 mm (3 in)	Cu-Ni-Mn Alloy	2 and 10 kPa 2 and 6 kPa vac	0.3 and 1.5 psi 0.3 and 0.9 Psi vacPB-PF
Diaphragm 50 mm (2 in)	Cu-Ni-Mn Alloy	6 and 70 kPa 6 and 35 kPa vac	0.9 and 10 psi 0.9 and 5 Psi vacPB-DF
Bellows	316 ss	35 and 200 kPa	4.5 and 29 PsiPB-CA
	Brass	30 and 180 kPa 34 and 100 kPa vac	4 and 26 psi 4.9 and 15 psi vacPB-CC
Spiral	316 ss	82 and 1400 kPa 82 and 100 kPa vac	12 and 200 psi 12 and 15 psi vacPB-BA
	K-Monel	140 and 1400 kPa	20 and 200 psiPB-BM
Helical	316 ss	1400 and 40 000 kPa	200 and 6000 psiPB-AA
	K-Monel	1700 and 14 000 kPa	250 and 2000 psiPB-AM
Heavy Duty Helical	316 ss	500 and 200 000 kPa	75 and 30 000 psiPB-GA
Absolute Bellows	316 ss	17 and 240 kPa abs	2.5 and 35 psiaPA-CA
	Bronze	13 and 270 kPa abs	1.9 and 39 psiaPA-CC
Absolute Double Spiral	316 ss	140 and 700 kPa abs	20 and 100 psiaPA-MA

(a) Code PC-OC when used with the 43APG Series Controller on Page 48.

2) SPECIFY MEASUREMENT RANGE _____

3) SPECIFY OPTIONAL FEATURES _____

4) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

FILLED THERMAL SYSTEM ELEMENTS

THERMAL ELEMENTS

■ Dependable

- Field-proven performance.

■ Nonelectric

- Continuous operation, even with power failure.

■ Safe

- Suitable for Class I, Division 1 hazardous locations.



For complete specifications, refer to Product Specification Sheet PSS 3-3A1 A.

Filled Thermal System Elements consist of sensor, connection tubing, and mechanical element.

Functional Specifications

Thermal System Types:

Class IA:

A thermal system that is completely filled with an incompressible liquid under pressure. The system is fully compensated for ambient temperature variations at case and along the tubing.

Class IIA:

A thermal system that is evacuated and partially filled with a volatile liquid, such as methyl chloride (CL), ether (ET), butane (BU), or toluene (T).

Class IIIB:

A gas system that is filled under pressure with purified nitrogen.

Standard Ranges, Standard Spans, and Range Limits:

CLASS IA					CLASS IIA	CLASS IIIB		
Standard Spans	X Length		Range Limits		Standard Ranges (Fills)	Standard Spans	Range Limits	
			Minimum	Maximum			Minimum	Maximum
°C	mm	in	°C	°C	°C	°C	°C	°C
25	122	4.8	13	120	38 to 105 (BU)	100	-40	170
50	69	2.7	-15	200	105 to 150 (ET)	150	-15	400
75	53	2.1	-38	200	50 to 205 (T)	200	-15	500
100	43	1.7	-63	200	38 to 150 (ET)	250	-15	500
150	36	1.4	-73	250	50 to 250 (T)	300	-15	500
200	30	1.2	-73	260		400	-15	500
250	28	1.1	-73	260		500	-15	500
°F	mm	in	°F	°F	°F	°F	°F	°F
50	112	4.4	50	250	100 to 180 (CL)	150	-50	240
100	69	2.7	0	400	100 to 220 (BU)	200	-50	425
150	51	2.0	-50	400	100 to 250 (BU)	300	0	825
200	43	1.7	-100	400	100 to 270 (BU)	400	0	1000
250	36	1.4	-100	400	100 to 300 (ET)	500	0	1000
300	33	1.3	-100	500	100 to 350 (ET)	600	0	1000
400	28	1.1	-100	500	100 to 400 (T)	700	0	1000
500	25	1.0	-100	500	200 to 500 (T)	800	0	1000
						1000	0	1000

THERMAL ELEMENTS

Performance Specifications

Accuracy:

Class IA:

 $\pm 0.5\%$ of calibrated span for spans up to 215°C (400°F). $\pm 0.75\%$ of calibrated span for spans between 215 and 330°C (400 and 600°F).

Class IIA:

 $\pm 0.5\%$ of calibrated span over upper 2/3 of scale.

Class IIIB:

 $\pm 0.5\%$ of calibrated span for spans up to 330°C (600°F). $\pm 0.75\%$ of upper range value for upper range value above 330°C (600°F). $\pm 0.75\%$ of lower range value for lower range value below 45°C (-50°F).

Physical Specifications

Sensor Type:

Adjustable union, bendable extension.

Sensor Dimensions:


X = Sensitive portion length.

U = Insertion length.

J = Extension length.

B = Bushing thread type and size.

Y = Sensor diameter.

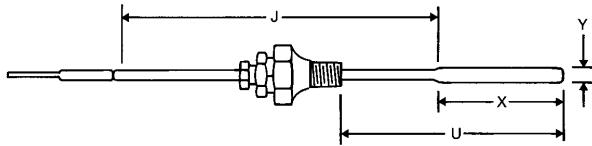

J = 450mm(18in).

X = 100 mm (4 in) for Class IIA and 150 mm (6 in) for Class IIIB systems. For Class IA systems, X is governed by sensor diameter and measurement span. See table under "FUNCTIONAL SPECIFICATIONS" on previous page.

U = (minimum) = X + 50 mm (2 in).

U = (maximum) = X + 380 mm (15 in).

B = 1/2, 3/4, or 1 NPT external threads as specified for Class IA or IIA systems and 1 NPT external threads for Class IIIB systems.

Y = 9.53 mm (3/8 in) for Class IA and IIA, 22.26 mm (7/8 in) for Class IIIB.

Connecting Tubing:

1.5, 4.5, or 7.5 m (5, 15, or 25 ft) flexible stainless steel over stainless capillary.

Optional Features

Alternative Thermal Systems:

- a) Longer capillary lengths and types.
- b) Other ranges and spans.
- c) Sanitary fittings.
- d) IIB system.

Thermowells:

Refer to Page 37.

Mounting Flanges.**Special Purpose Sensors:**


Preformed capillary, flush type, coated type, etc.

How to Order

- 1) **SPECIFY BASE INSTRUMENT BY MODEL NUMBER** (Recorder, Indicator, Controller, Transmitter) _____
- 2) **SPECIFY CLASS/TUBING/SENSOR CODES**
 - IA Liquid Filled: TA-1A/D-FS-SS/4542-J18 _____
 - IIA Vapor Filled: TA-2A/S-FS-SS/2542-J18 _____
 - IIIB Gas Filled: TA-3B/S-FS-SS/3542-J18 _____
- 3) **SPECIFY CALIBRATED RANGE** (must meet requirements of table under "Functional Specifications" on Page 55) _____
- 4) **SPECIFY NORMAL WORKING TEMPERATURE** _____
- 5) **SPECIFY AMBIENT TEMPERATURE AT CASE AND ALONG TUBING** _____
- 6) **SPECIFY SENSOR DISTANCE ABOVE OR BELOW CASE** (Class IIA systems only) _____
- 7) **SPECIFY ANTICIPATED "U" DIMENSION** (insertion length) _____
- 8) **SPECIFY BUSHING THREAD SIZE "B" DIMENSION; SPECIFY 1/2, 3/4, OR 1 NPT FOR IA OR IIA SYSTEMS, 1 NPT FOR IIIB SYSTEMS** _____
- 9) **SPECIFY OPTIONAL FEATURES** _____
- 10) **SPECIFY INFORMATION FOR INSTRUMENT TAG** _____

Large Case Instruments (Elements)

SERVO ELEMENTS

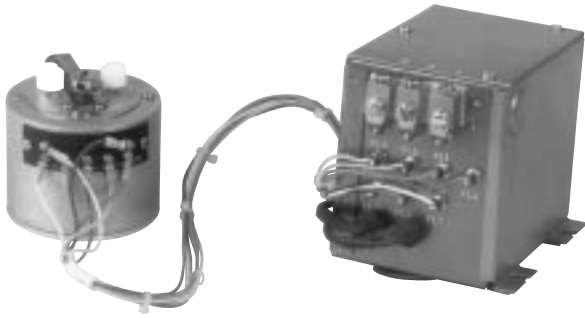

Electronic Servo Elements are used with 40P and 40M Series Recorders, Indicators, and Controllers; 43AP and 43EP Series Indicating Controllers; and 45P Series Transmitters.

ELECTRONIC SERVO ELEMENTS

■ Sealed Conductive Plastic Slidewire

- Does not need frequent cleaning.
- Fast response and long life.

■ RFI Protected Electronics

- Module may be field-mounted.

■ dc Torque Motor

- No brushes or gears.

For complete specifications, refer to Technical Information Sheet TI 27-1a.

Functional Specifications

Standard Ranges:

Measurement Range Code Table (see "HOW TO ORDER" for description of sensor codes):

Range Code	Range	Sensor Codes Available							
		mV	mA	°C		°F			
01	0 to 5	M							
02	0 to 10	M							
03	0 to 20	M							
04	0 to 30					Q			
05	0 to 50	M				Q			Q
06	-50 to -50					Q			Q
07	-100 to +50			J					
08	0 to 75	M				Q			
09	-20 to +80			J					
10	0 to 100	M		J		Q			Q
11	-100 to 0					Q		J	E
12	-200 to +100			J	E			J	E
13	-100 to +100				E				
14	50 to 100					Q			
15	-20 to +120								Q
16	—								
17	-25 to +125		T						
18	0 to 150			J		Q			Q
19	-50 to -150			J	E				
20	50 to 150								Q
21	4 to 20	A							
22	10 to 50	A							
23	0 to 200		T	J	K	Q		J	Q
24	-100 to +200				E			J	E
25	100 to 200					Q			Q
26	0 to 250		T	J		Q	T	E	Q
27	-50 to +250		T					J	
28	50 to 250					Q		J	Q
29	0 to 300			J	K	Q	T	J	Q
30	-350 to +300						T	E	
31	100 to 300			J		Q		J	Q
32	0 to 40			J	K	Q	T	J	K
33	100 to 40								K
34	200 to 400			J		Q			Q
35	0 to 500			J	K	Q	T	J	K
36	-150 to +500						T	E	
37	200 to 500				K				Q
38	300 to 500			J					

Range Code	Range	Sensor Codes Available									
		mV	mA	°C		°F					
39	0 to 600			K		T	J				Q
40	—										
41	200 to 600						J				
42	300 to 600			J		T					Q
43	0 to 700			J			J				
44	200 to 700			J							
45	0 to 750			J	K			K			
46	0 to 800				R		J				Q
47	100 to 800						J	K			
48	300 to 800			K			J	K			
49	0 to 900						J				Q
50	500 to 900			K			J				
51	700 to 900			K	S		J				
52	0 to 1000			K	S		J	K			
53	500 to 1000						J	K			
54	0 to 1200						J	K			
55	200 to 1200						J	K			
56	400 to 1200						J	K			
57	0 to 1300				R						
58	—										
59	800 to 1400				R						
60	900 to 1400				S						
61	0 to 1500				R		J				
62	500 to 1500						J	K			
63	0 to 1600							K			
64	1100 to 1600				S		J				
65	1200 to 1600							K			
66	500 to 1700				R			K			
67	0 to 1800						J	K			
68	0 to 2000							K			
69	1000 to 2000						J		R		
70	1200 to 2000								R		
71	0 to 2400							K			
72	1200 to 2400							K			
73	0 to 2500							K			
74	1000 to 2500							K			
75	1500 to 2500							K	R	S	
76	1700 to 2500								S		

Input Impedance (mA inputs):

4 to 20 mA (Range Code 21)-6.25 ohms.

10 to 50 mA (Range Code 22)-2.5 ohms.

Power Required:

See "HOW TO ORDER."

Performance Specifications

Accuracy:

±0.5% of calibrated span.

Repeatability:

0.25% of calibrated span.

Optional Features

Loop Power Supply:

30 V dc.

dc Voltage Inputs:

0.055 to 42 V dc.

Nonstandard Ranges:
Replacement Range Card:

Specify measurement type, measuring range code, range units, and thermocouple burnout (if required).

Power Failure Detection:

Positions pen either to 100% of range or to zero when ac power fails.

Item	Range Limits		Span Limits	
	lower	upper	minium	maximum
Millivolts, Thermocouples	-15 mV	100 mV	5 mV	100 mV
Resistance Temperature Detectors (RTDs)	18 ohms	330 ohms	8 ohms	300 ohms

SERVO ELEMENTS

How to Order

1) SPECIFY BASE INSTRUMENT BY MODEL NUMBER: _____

2) SPECIFY SERVO ELEMENT: E

Power Supply:

120Vac	S
220 V ac	N
240 V ac	P

Measurement—Sensor Type:

EC/ISA T (Cu-CuNi) Thermocouple	T
DIN 43710-77 (Cu-CuNi) Thermocouple	C
EC/ISA J (Fe-CuNi) Thermocouple	J
DIN 43710-77 (Fe-CuNi) Thermocouple	D
EC/ISA E (NiCr-CuNi) Thermocouple	E
EC/ISA K (NiCr-NiAl) Thermocouple (DIN 43710-77)	K
EC/ISA R (Pt13Rh-Pt) Thermocouple	R
EC/ISA S (Pt10Rh-Pt) Thermocouple (DIN 43710-77)	S
EC/ISA B (Pt30Rh-Pt6Rh) Thermocouple	B
dc mV	M
dc mA	A
Platinum RTD, 100-ohm DIN Resistance	Q
Nonstandard (including Temperature Difference)	X

Measurement Range:

Select 2-digit number from Measurement Range Code Table on Page 58. _____

Range Units:

Degrees Celsius	C
Degrees Fahrenheit	F
Millivolts	M
Milliamperes	A

Burnout Feature (thermocouples only):

Upscale action (not available with RTD)	U
Downscale action (not available with RTD)	D
None	N
Upscale action—Reverse Range (not available with RTD)	R
Downscale action—Reverse Range (not available with RTD)	S
None—Reverse Range	T

3) SPECIFY OPTIONAL FEATURES _____


4) SPECIFY SENSOR (e.g., THERMOCOUPLE OR RTD) TO BE ORDERED
SEPARATELY _____

5) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

TYPE 24E AND 24MB ELECTRIC INTEGRATORS

24E, 24MB, 70

- Used in 40P and 40M Series Recorders, Indicators, and Controllers

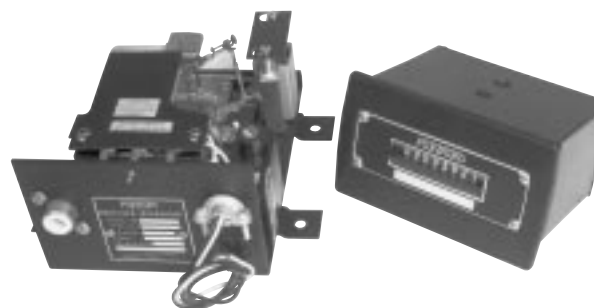

Type 24E and 24MB Electric Integrators are electromechanical devices used to totalize a measured variable.

Specifications

Type 24E:

Contacts:

Dry contact actuated triac (full wave solid-state switch).

Cam Function:

Uniform or square root, as specified.

Cam Cycle:

12 seconds.

Supply Voltage and Frequency:

120 V, 50 or 60 Hz or 240 V, 50 or 60 Hz; as specified.

Counter:

Choice of count rates.

Electrical Classification:

Foxboro and CSA certified for use in ordinary locations.

Type 24MB:

Contacts:

Magnet-actuated, mercury-wetted type, hermetically sealed.

Cam Function:

Uniform or square root, as specified.

Cam Cycle:

12 seconds.

Supply Voltage and Frequency:

120 V, 50 or 60 Hz or 240 V, 50 or 60 Hz; as specified.

Counter:

Choice of count rates.

Electrical Classification:

Foxboro and CSA certified for use in ordinary locations.

TYPE 70 ELECTRIC CONTACTS


- Used in 40P and 40M Series Recorders, Indicators, and Controllers and 43AP Series Indicating Controllers

Rotor Units:

Single or double rotor units are available, each having 3, 5, or 7 contact segments. One segment serves as the common or collector ring contact resulting in 2, 4, or 6 segments being available for relay actuation. Contact segments are adjustable with relation to each other by micrometer adjustment screws. This relationship is not disturbed by the contact setting mechanism.

Contact Setting Mechanism:

Each rotor unit is independently positioned to operate at desired values of measurement. A wide selection of setting mechanisms is available.

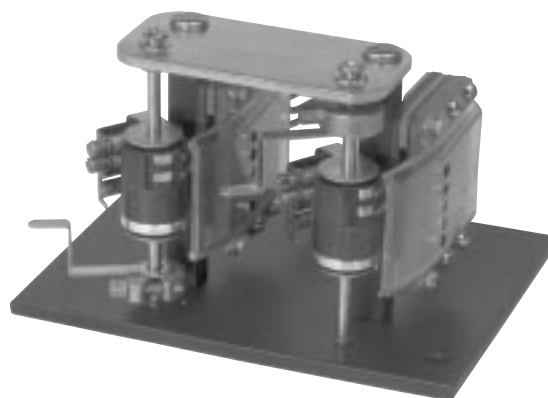

A Type 70 Electric Contact System is used to actuate external control or alarm circuits.

43EP, MR

43EP SERIES ELECTRIC INDICATING CONTROLLERS



43EP Series Electric Indicating Controllers indicate the measured variable. Errors between measurement and set point are detected and contacts are positioned accordingly. The contacts activate integral relays which may be used to operate solenoids, start and stop motors, etc. A wide variety of integrally mounted pressure, differential pressure, temperature, and electronic servo measuring elements is available.

MR Series Receiver Gauges



MR Series Receiver Gauges accept 3 to 15 psi inputs from remotely located pneumatic transmitters. A wide variety of dials and scales is available to indicate measurements in convenient engineering units.

PANEL MOUNTED PNEUMATIC INSTRUMENTS

CONSOTROL 100 is a complete family of pneumatic controllers, recorders, indicators, and auxiliary devices.

These instruments can handle the special requirements of virtually any application — from simple single control loops to interrelated multivariable systems.

Each CONSOTROL 100 unit is perfectly matched with other foxboro pneumatic instruments — including transmitters, valves, and accessories.

And they are engineered to fit into control configurations of all sizes. Together, they deliver exceptionally high system performance.

CONSOTROL 100 Instruments give you:

Bold, Readable Displays

Continuous scale indication of process variables and deviation from set point.

Separate Automatic and Manual Functions

Avoids forced shutdowns — control can be maintained in either mode.

Accurate Force Balance Control Modules

Metallic bellows, flexure-suspended balance member for precise operation.

Balanceless, Bumpless Auto/Manual Transfer

Fast, safe selection of operating mode.

Simple, Low Cost Mounting

Shelves accommodate up to ten instruments. Integral air manifold reduces piping costs. Individual air shutoff valve for each instrument.

Easy Service

Pneumatic circuit board has simple piping and connections. Components are highly accessible — all behind one sliding cover.

Panel Mounted Pneumatic Instruments *(Indicating Controllers)*

130M, 130P, 130F



130M



130P



130F

130M, 130P, and 130F Series Pneumatic CONSOTROL Indicating Controllers compare a remote transmitter signal with a set point and produce a control signal to a final actuator.

130M, 130P, 130F SERIES PNEUMATIC CONSOTROL INDICATING CONTROLLERS

- **130M**—manual set point adjustment.
- **130P**—set point pneumatically adjusted by a remote signal.
- **130F**—remote/local switch for manual or pneumatic adjustment of set point.

For complete specifications, refer to Product Specification Sheet PSS 2B-4H 1 A.

Functional Specifications

Supply Pressure:

140 to 150 kPa or 20 to 22 psi.

Input/Output Signal:

20 to 100 kPa or 3 to 15 psi, as specified.

Mode Adjustment Limits:

Proportional Band: 5 and 500%.

Integral Action:

0.01 and 50 minutes per repeat.

Derivative Action:

0.01 and 50 minutes.

Ambient Temperature Limits:

-20 and +65°C (0 and 150°F) .

Control Action Reversal:

The control action is reversed by a 90 degree rotation of the reversing switch.

Auto/Manual Transfer Unit:

A 2-position switch lever located on the front of the manual unit is used to switch directly from automatic to manual or, on controllers with integral, from manual to automatic without bumping the process.

Performance Specifications

Accuracy:

Measurement and Set Point Indicators: $\pm 0.5\%$ of calibrated span.

Output Indicator: $\pm 2\%$ of calibrated span.

Repeatability:

Measurement and Set Point Indicators: Better than 0.25% of calibrated span.

Alignment Error:

Automatic Control Unit: Less than 0.5% of calibrated span.

Dead Band:

Automatic Control Unit: Less than 0.1 % of calibrated span.

Measurement and Set Point Indicators: Less than 0.1% of calibrated span.

Physical Specifications

Mounting:

These controllers are designed for flush mounting in vertical panels 3 to 25 mm (0.13 to 1 in) thick using 102 or 101 Series Shelves. Each controller requires 1 unit of shelf capacity. They may be calibrated for mounting in a panel inclined up to 75 degrees from vertical with the rear of the instrument lower than the front.

Connections:

Separate electric and pneumatic connectors are located on the rear of the chassis in accordance with the standard arrangement for 102 Series Shelves.

Nameplate:

White translucent plastic with 2.5 mm (0.1 in) high black letters. There can be a maximum of 2 lines with 17 characters or spaces per line.

Physical Specifications (continued)

Pointers:

Measurement: Red.
Manual Set (130M Series) and Remote Set (130P and 130F Series): Black on white.
Local Set (130F Series): Black.
Output: Red.

Scales:

Vertical Scale: Removable, transparent plastic with black markings; 100 divisions, scaled as specified.
Output: Black markings on a white background; 20 divisions from 0 to 100% output signal. The red pointer continuously indicates automatic or manual output. Refer to Chart and Dial Catalog 600.

Optional Features

“Batch” Controller:

Prevents integral circuit saturation during shutdown or other periods of sustained set point and measurement deviation. Includes internal adjustment for preload.

High “Batch” Unit:

Operates when controller output pressure exceeds 100 kPa or 15 psi. Specify by substituting 130MB, 130PB, or 130FB in place of 130M, 130P, or 130F in Model Number.

Low “Batch” Unit:

Operates when controller output pressure falls below 20 kPa or 3 psi. Specify by substituting 130MB, 130PB, or 130FB in place of 130M, 130P, or 130F in Model Number plus AS Reference BSL.

External Connection to Integral Bellows:

Permits connection of external feedback signal to prevent integral circuit saturation.

External Set Point Connection:

Not available for 130F Series with External Connection to Integral Bellows option. Provides access to set point signal. Maximum transmission distance is 1.5 m (5 ft) and all external connections must be leaktight due to low air delivery of aspirating relay. Use 1:1 repeating relay for greater transmission distances.

Alarm Actuators, Alarm Lamps, and Flasher Systems:

Refer to Page 82.

How to Order

1) SPECIFY MODEL NUMBER:

Controller:

with Manually Positioned Set Point	130M-N
with Pneumatically Positioned Set Point.....	130P-N
with Remote/Local Set	130F-N

Control Function:

On/off	1
Proportional.....	2
Proportional plus derivative.....	3
Proportional plus integral.....	4
Proportional plus integral plus derivative	5

2) SPECIFY INPUT/OUTPUT SIGNAL _____

3) SPECIFY SET POINT AND MEASUREMENT SCALE RANGE—REFER TO CHART AND DIAL CATALOG 600_____

4) SPECIFY MOUNTING EQUIPMENT—102 OR 101 SERIES SHELVES_____

5) SPECIFY OPTIONAL FEATURES _____

6) SPECIFY INFORMATION FOR NAMEPLATE AND INSTRUMENT TAG _____

130 AUTO-SELECTOR



The 130 Series Pneumatic CONSOTROL Auto-Selector Control System controls two or more related variables within preset limits.

For complete specifications, refer to General Specification Sheet GS 2B-4H 1 D.

130 SERIES PNEUMATIC CONSOTROL AUTO SELECTOR CONTROL SYSTEM

■ One Final Actuator

- To prevent any of several process measurements from exceeding their set points.

■ Continuous Measurement

- Variables are measured and control is transferred to the one that is tending to exceed its limit.

■ Auto/Manual Switch

- Smooth transfer by means of a single 2-position switch.
- Balanceless, bumpless.

■ A Complete System Consists of:

- One 130MS (local set) or 130FS (local/remote set) controller with manual transfer unit.
- One or more 130MA (local set) or 130FA (local/remote set) controllers without manual units.
- Rack mounted high or low selector relays.
- A rack mounted seal valve.

Functional Specifications

Supply Pressure:

140 to 150 kPa or 20 to 22 psi.

Input/Output Signal:

20 to 100 kPa or 3 to 15 psi, as specified.

Mode Adjustment Limits:

Proportional Band: 5 and 500%.

Integral Action:

0.01 and 50 minutes per repeat.

Derivative Action:

0.01 and 50 minutes.

Ambient Temperature Limits:

-20 and +65°C (0 and 150°F).

Control Action Reversal:

The control action is reversed by a 90 degree rotation of the reversing switch.

Auto/Manual Transfer Unit:

A 2-position switch lever located on the front of the manual unit is used to switch directly from automatic to manual and from manual to automatic without

Performance Specifications

Accuracy:

Measurement and Set Point Indicators: $\pm 0.5\%$ of calibrated span.

Output Indicator: $\pm 2\%$ of calibrated span.

Repeatability:

Measurement and Set Point Indicators: Better than 0.25% of calibrated span.

Dead Band:

Automatic Control Unit: Less than 0.1% of calibrated span.

Measurement and Set Point Indicators: Less than 0.1% of calibrated span.

Alignment Error:

Automatic Control Unit: Less than 0.5% of calibrated span.

Physical Specifications

Mounting:

These controllers are designed for flush mounting in vertical panels 3 to 25 mm (0.13 to 1 in) thick using 102 or 101 Series Shelves. Each controller requires

1 unit of shelf capacity. They may be calibrated for mounting in a panel, inclined up to 75 degrees from vertical, with the rear of the instrument lower than the front.

Physical Specifications (continued)

Connections:
Separate electric and pneumatic connectors are located on the rear of the chassis in accordance with the standard arrangement for 101, 102 Series Shelves..

Nameplate:
White translucent plastic with 2.5 mm (0.1 in) high black letters. There can be a maximum of 2 lines with 17 characters or spaces per line.

Pointers:
Measurement: Red.

Manual Set (130M Series) and Remote Set (130F Series): Black on white.

Local Set (130F Series): Black.

Output: Red.

Scales:
Vertical Scale: Removable, transparent plastic with black markings; 100 divisions, scaled as specified.

Output:
Black markings on a white background; 20 divisions from 0 to 100% output signal. The red pointer continuously indicates automatic or manual output. Refer to Chart and Dial Catalog 600.

Nominal Dimensions (including manual unit):
205 mm high x 70 mm wide x 555 mm deep (8.2 in high x 2.8 in wide x 21.8 in deep).

Selector Relays and Volume Booster:
A low selector relay is required for each controller in a "LOW" Auto-Selector System. A "HIGH" selector system requires one less high selector relay than the number of controllers and one low selector relay used as a volume booster in the system output. Specify High Selector, Part No. B0114YL or Low Selector, Part No. B0114BZ.

Seal Valve:
One pneumatically actuated seal valve is required per Auto-Selector System. Specify Part No. C0138RM.

Optional Features

"Batch" Controller:
High "Batch" feature available only for controllers used in "LOW" Auto-Selector Systems. Add Suffix -B to Model Number.

Alarm Actuators, Alarm Lamps, and Flasher System: Refer to Page 82.

How to Order

1) SPECIFY MODEL NUMBER:

Controller:
with Manually Positioned Set Point130M
with Remote/Local Set Point130F

Auto-Selector:
without Manual Transfer Unit.....A
with Manual Transfer UnitS

Control Function:
Proportional plus integral.....N4
Proportional plus integral plus derivative.....N5

- 2) SPECIFY INPUT/OUTPUT SIGNAL _____
- 3) SPECIFY SET POINT AND MEASUREMENT SCALE—REFER TO CHART AND DIAL CATALOG 600 _____
- 4) SPECIFY SELECTOR RELAYS AND SEAL VALVE _____
- 5) SPECIFY MOUNTING EQUIPMENT—102 OR 101 SERIES SHELVES _____
- 6) SPECIFY OPTIONAL FEATURES _____
- 7) SPECIFY INFORMATION FOR NAMEPLATE AND INSTRUMENT TAG _____

130Z



The 130Z Series Pneumatic CONSOTROL Ratio Controllers maintain a controlled or secondary process variable at a preset ratio to an uncontrolled or primary variable.

130Z SERIES PNEUMATIC CONSOTROL RATIO CONTROLLERS

■ Versatile

- Wide variety of standard ranges.

■ Self-Contained

- All functions fully enclosed.

■ Indicator Sharing Switch

- Permits indication of the uncontrolled or primary variable before and after it is multiplied by the ratio mechanism.

■ Local Setting

- Set point may be manually adjusted.

For complete specifications, refer to General Specification Sheet GS 2B-4H1 F.

Functional Specifications

Supply Pressure:

140 to 150 kPa or 20 to 22 psi.

Input/Output Signal:

20 to 100 kPa or 3 to 15 psi, as specified.

Mode Adjustment Limits:

Proportional Band: 5 and 500%.

Integral Action: 0.01 and 50 minutes per repeat.

Derivative Action: 0.01 and 50 minutes.

Ambient Temperature Limits:

-20 and +65°C (0 and 150°F).

Control Action Reversal:

The control action is reversed by a 90 degree rotation of the reversing switch.

Auto/Manual Transfer Unit:

A 2-position switch lever located on the front of the manual unit is used to switch directly from automatic to manual or from manual to automatic without bumping the process.

Performance Specifications

Accuracy:

Measurement, Set Point, and Ratio Indicators: $\pm 0.5\%$ of calibrated span.

Output Indicator: $\pm 2\%$ of calibrated span.

Repeatability:

Measurement and Set Point Indicators: Better than 0.25% of calibrated span.

Dead Band:

Automatic Control Unit: Less than 0.1 % of calibrated span.

Measurement and Set Point Indicators: Less than 0.1% of calibrated span.

Alignment Error:

Automatic Control Unit: Less than 0.5% of calibrated span.

Physical Specifications

Mounting:

These controllers are designed for flush mounting in vertical panels 3 to 25 mm (0.13 to 1 in) thick using 102 or 101 Series Shelves. Each controller requires 1 unit of shelf capacity. They may be calibrated for mounting in a panel inclined up to 75 degrees from vertical with the rear of the instrument lower than the front. Specify the mounting angle.

Connections:

Separate electric and pneumatic connectors are located on the rear of the chassis in accordance with the standard arrangement for 101, 102 Series Shelves.

Nameplate:

White translucent plastic with 2.5 mm (0.1 in) high black letters. There can be a maximum of 2 lines with 17 characters or spaces per line.

Physical Specifications (continued)

Pointers:
Ratio set, black; controlled or secondary variable, red; uncontrolled or primary variable, black on white.

Output: Red.

Nominal Dimensions (including manual unit):
205 mm high x 70 mm wide x 555 mm deep (8.2 in high x 2.8 in wide x 21.8 in deep).

Scales:
Vertical Scale: Removable, transparent plastic with black markings; 100 divisions, scaled as specified. Refer to Chart and Dial Catalog 600.

Output: Black markings on a white background; 20 divisions from 0 to 100% output signal. The red pointer continuously indicates automatic or manual output.

Optional Features

“Batch” Controller:
Prevents integral circuit saturation during shutdown or other periods of sustained set point and measurement deviation. Includes internal adjustment for pre-load.

High “Batch” Unit:
Operates when controller output pressure exceeds approximately 100 kPa or 15 psi. Specify Model Suffix -B.

Low “Batch” Unit:
Operates when controller output pressure falls below approximately 20 kPa or 3 psi. Specify Model Suffix -B plus AS Reference BSL.

External Connection to Integral Bellows:
(Not available with External Set Point Connection option.) Permits connection of external feedback signal to prevent integral circuit saturation.

External Set Point Connection:
(Not available with External Connection to Integral Bellows option.) Provides access to set point signal. Maximum transmission distance is 1.5 m (5 ft) and all external connections must be leaktight due to low air delivery of aspirating relay. Use 1:1 repeating relay for greater transmission distances.

Alarm Actuators, Alarm Lamps, and Flasher System:
Refer to Page 82.

How to Order

1) SPECIFY MODEL NUMBER: 130Z

Ratio Range:	
0 to 1.0 linear or square root.....	W
0.6 to 1.3 linear	X
0 to 3.0 linear or 0 to 1.7 square root	Y
Control Function:	
Proportional plus integral	N4
Proportional plus integral plus derivative.....	N5

- 2) SPECIFY INPUT/OUTPUT SIGNAL _____
- 3) SPECIFY SET POINT AND MEASUREMENT SCALE RANGE—REFER TO CHART AND DIAL CATALOG 600 _____
- 4) SPECIFY MOUNTING EQUIPMENT—102 OR 101 SERIES SHELVES _____
- 5) SPECIFY OPTIONAL FEATURES _____
- 6) SPECIFY INFORMATION FOR NAMEPLATE AND INSTRUMENT TAG _____

130K



The 130K Series Computer Set Indicating Controllers provide supervisory set point analog control of a process.

130K SERIES COMPUTER SET INDICATING CONTROLLERS

■ Self-Contained

- Set point drive and interface circuitry enclosed in controller chassis.

■ Dependable

- Drive coupled directly to set point shaft.

■ Choice of Feedback Signals

- Pneumatic feedback of set point signal.
- Voltage feedback proportional to set point.
- Voltage feedback proportional to process measurement.

■ Positive Set Point Limits

- Accurate and repeatable.

■ Inherent Set Point

- During computer or electrical failure, set point remains at last indicated value.

For complete specifications, refer to Product Specification Sheet PSS 2B-4H 1 G .

Functional Specifications

Input/Output Signal:

20 to 100 kPa or 3 to 15 psi, as specified.

Supply Pressure Limits:

140 and 150 kPa or 20 and 22 psi.

Power Requirements:

250 mA dc at 24 V dc, +10 -0% (300 mA dc with -LL option).

Mode Adjustment Limits:

Proportional Band: 5 and 500%.

Integral Action: 0.01 and 50 minutes per repeat.

Derivative Action: 0.01 and 50 minutes.

Ambient Temperature Limits:

5 and 65°C (40 and 150°F).

Control Action Reversal:

90 degree rotation of reversing switch reverses controller action.

Scale:

Measurement and Set Point Indicators: 100 divisions, scaled as specified, 100 mm (4 in) graduated length.

Output Indicator: 20 divisions from 0 to 100% reading output pressure, continuously indicates automatic or manual output.

Nameplate:

White translucent plastic with 2 mm (0.1 in) high black characters. Maximum of 2 lines with 20 characters or spaces per line.

Pointers:

Process Measurement: Red.

Set Point: Black.

Output: Red.

Set Point Resolution:

0.1% of calibrated span per input closure, nominal.

Status Contact Rating:

Computer/Local Switch: 100 mA dc maximum at 24 V dc.

Auto/Manual Switch: 100 mA dc maximum at 24 V dc.

Set Point Limit Switches: 100 mA dc maximum at 24 V dc.

Functional Specifications (continued)

Computer Set Point Input Signals:

Parameter	Contact Closure to Logic Common	Solid State to Logic Common	Positive Pulse to Logic common
Duration	4 ms minimum open or closed time	4 ms minimum on or off time	4 ms minimum pulse width and time between pulses
Rating	1.5 mA minimum	1.5 mA minimum	—
Amplitude (High)	—	—	5 to 24 V dc
Amplitude (Low)	—	—	-3 to +0.8 V dc
Bounce	0.5 ms maximum	—	—
Current Sink	—	—	1.5 mA maximum
Transition	—	1 ms maximum, active transition	1 ms maximum, active transition
Active	Opening or closing jumper selectable	High-to-low or low-to-high jumper selectable	Leading or trailing edge, jumper selectable
Rest State	Open or closed	On or off	High or low
Rate	125 closures per second maximum	125 closures per second maximum	125 closures per second maximum
Lead Wire Resistance	100 Ω maximum	100 Ω maximum	100 Ω maximum

Performance Specifications

Measurement and Set Point Indicators:

Accuracy: $\pm 0.5\%$ of calibrated span.

Repeatability: Less than 0.25% of calibrated span.

Dead Band: Less than 0.1% of calibrated span.

Automatic Control Unit:

Alignment Error: Less than 0.5% of calibrated span.

Dead Band: Less than 0.1% of calibrated span.

Output Indicator:

Accuracy: $\pm 2\%$ of calibrated span.

Physical Specifications

Connections:

Multipole electrical and multichannel pneumatic connectors on rear of chassis.

Mounting:

Flush in panels 3 to 25 mm (0.13 to 1 in) thick using 102 or 101 Series Shelves. These controllers require 1 unit width of mounting capacity.

Output Options

Pneumatic Set Point Feedback:

Provides a high capacity relay to generate the set point signal with an external connection for readout. Not available with electric set point or measurement feedback features. Specify Model Suffix -PF.

Electric Set Point Feedback:

Provides an accurate voltage signal proportional to the set point. Voltage ranges of 1.0 to 5.0 or 0.2 to 1.0 V do into 20 k Ω or 200 k Ω minimum (respectively), selected on-site or as specified. Not available with pneumatic set point or measurement feedback features. Specify Model Suffix -SF.

Measurement Feedback:

Provides an accurate voltage signal proportional to the process measurement signal. Voltage ranges of 1.0 to 5.0 or 0.2 to 1.0 V dc into 20 k Ω or 200 k Ω minimum (respectively), selected on-site or as specified. Not available with pneumatic or electric set point feedback features. Specify Model Suffix -MF.

External Connection to Integral Bellows:

Allows the integral circuit pressure to be supplied from an external source. Specify AS Reference ECRB.

Set Point Limit Warning Lamps:

Two lamps, located behind the nameplate above the process scale, are actuated by the high and low set point limit circuits. Specify Model Suffix -LL.

Externally Powered Lamps:

As an alternate to the signal lamps in the set point limit option, the two lamps may be connected to the terminal block at the rear of the shelf using three wires, identified as left lamp, right lamp, and lamp common. The lamps are externally powered by 24 V ac or dc. Specify Model Suffix -LE.

Set Point Limits:

Accurate and repeatable limit switches open the high or low input circuits for positive stops. Limit points are indicated on the left side of the process measurement scale by black pointers. The limits are individually adjustable, without tools, through an access slot on the left side of the controller. The limit adjustments are accessible from the front of the panel by partially withdrawing the instrument from the shelf. The limit switches also provide limit status feedback. Specify Model Suffix -LS.

130K

How to Order

1) SPECIFY MODEL NUMBER:

Control Function:	
Proportional.....	130K-N2
Proportional plus derivative.....	130K-N3
Proportional plus integral.....	130K-N4
Proportional plus integral plus derivative	130K-N5

2) SPECIFY INPUT/OUTPUT SIGNAL _____

3) SPECIFY SET POINT AND MEASUREMENT SCALE RANGE—REFER TO CHART AND
DIAL CATALOG 600 _____

4) SPECIFY MOUNTING EQUIPMENT _____

5) SPECIFY 24 VOLT POWER SUPPLY _____

6) SPECIFY OPTIONAL FEATURES _____

7) SPECIFY INFORMATION FOR NAMEPLATE AND INSTRUMENT TAG _____

127S SERIES PNEUMATIC CONSOTROL RECORDERS

127S

■ Bold, Readable Displays

- Bright red, green, and blue ribbon indicators.
- Individual scales.

■ Simple Maintenance


- Accessible modular components.
- Adjustments can be made while instrument is in operation.

■ Easy Chart Changing and Pen Replacement

- Removable chart drive.
- Snap-in, fiber-tip pen cartridges.

■ Precise Servo Mechanism

- Accurately positions pens.
- All-pneumatic.
- Guided by force balance detector.

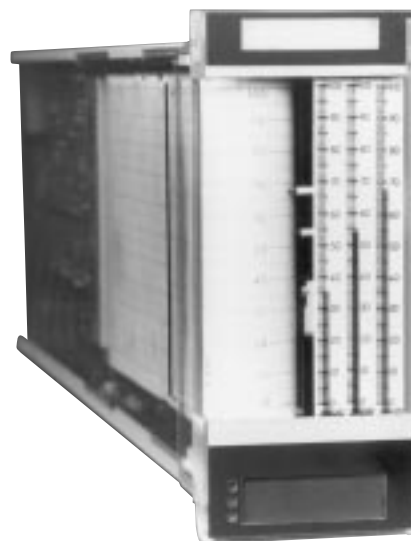

The 127S Series Pneumatic CONSOTROL Recorders record up to 3 process measurements received from remote transmitters.

For complete specifications, refer to Product Specification Sheet PSS 2B-3E2 B.

Functional Specifications

Pneumatic Input Signal:

3 to 15 psi (20 to 100 kPa) (0.20 to 1.0 Kg/cm²) or 3 to 18 psi (20 to 120 kPa) (0.2 to 1.2 Kg/cm).

Supply Pressure:

120 to 150 kPa or 18 to 22 psi.

Power Requirements:

24 \pm 4 V ac, 120 or 240 V ac, +10, -15%, 50 or 60 Hz, as specified. Required with electric chart drive only.

Fusing:

Required with electric chart drive only. For 24 V ac: No fuse required.

For 120 V ac: 3/8 A.

For 240 V ac: 1/4 A.

Ambient Temperature Limits:

5 and 50°C (40 and 120°F).

Pen Speed:

The elapsed time for the pen to travel from 10 to 90% of full scale is adjustable from less than 3 to greater than 20 seconds.

Mounting Position:

Normal mounting position is horizontal. Instrument can also be mounted up to a 15 degree angle with the rear of the instrument above the front, or down to a 75 degree angle with the rear of the instrument below the front.

Adjustments:

Zero and span adjustments are accessible in the service (partially withdrawn) position, and provide a minimum of \pm 2% adjustment after the instrument has been calibrated. Ribbon indicator has an adjustment for zeroing relative to pen. No separate ribbon span adjustment is necessary, since the ribbon travels with the pen.

Electrical Classification:

These instruments have been designed for use in ordinary locations.

Performance Specifications

Accuracy:

\pm 0.5% of calibrated span.

Repeatability:

0.15% of calibrated span.

Physical Specifications

Connections:

Separate electric and pneumatic connectors are located on the rear of the instrument chassis in accordance with the standard arrangement for 102 and 101 Series Shelves.

Front Door:

Hinged at bottom to provide access to chart and pens. Lens material is transparent molded polycarbonate.

Right Side Access Cover and Calibration**Door:**

Removable access cover and a hinged-down calibration door provide access to internal parts and adjustments.

Nominal Dimensions:

69 mm wide x 165 mm high x 478 mm long (2.7 in wide x 6.5 in high x 18.8 in long).

Pens:

1, 2, or 3, as specified.

Red Pen: Located in center position.

Green Pen: Located in inner position.

Blue Pen: Located in outer position.

Pen Separation: Approximately 12 minutes at the standard chart speed of 20 mm/h (0.8 in/h).

Left Side Access Cover:

Sliding cover provides access to internal parts. Cover material is transparent molded polycarbonate.

Instrument Mounting:

Up to 10 instruments can be mounted in Foxboro 102 Series Shelves (706 mm [27.8 in] deep). Up to 4 instruments can be mounted in Foxboro 101 Series Shelves (544 mm [21.4 in] deep). Shelves are designed for flush mounting in 3 to 25 mm (0.13 to 1 in) thick panels.

Nameplate:

A gray polycarbonate nameplate is attached to the lower surface of the front door. It provides space for 3 lines which can have approximately 24 characters (including spaces) to accommodate a description of each input signal. A green, red, and blue (from top to bottom) color identification dot at the beginning of each line corresponds to the pen color and applicable input signal description.

Optional Features

Chart Drives:

The following chart drives are available at supply voltages of 24, 120, or 240 V, and frequencies of 50 or 60 Hz; EXCEPTION: 5 mm/h (0.2 in/h) not available with 24 V. Selectable by specifying single or dual speed, chart speed, voltage, and frequency.

Single Speed: 5, 10, 20, 40, 80, 120, 320, 720 and 2400 mm/h (0.2, 0.4, 0.8, 1.6, 3.1, 4.7, 6.4, 28.2 and 96.0 in/h).

Dual Speed: 20 mm/h and 20 mm/min (0.8 in/h and 0.8 in/min). 20 mm/h and 40 mm/min (0.8 in/h and 1.6 in/min).

Pneumatic Impulse: 20 mm/h (0.75 in/h).

Special Pen Position for 2-Pen Recorder:

Optionally available is a 2-pen recorder with the red pen in the center position and the blue pen in the outer position. Selectable by specifying model number for 2-pen recorder and AS Reference SPP.

Charts:

A selection of standard charts is available. Refer to Foxboro Chart and Dial Catalog 600.

Alarm Lamps:

Refer to Page 82.

How to Order

1) SPECIFY MODEL NUMBER: 127S-

Pen and Indicator Quantity and Color:

- 1 pen and 1 indicator (red)1
- 2 pens and 2 indicators (red and green).....2
- 3 pens and 3 indicators (red, green, and blue).....3

Chart Drive:

- Electric, single speed, 20 mm/h (0.8 in/h)E
- Pneumatic impulse, 20 mm/h (0.8 in/h). Not available with code 3 above.
- Codes X and O below must be specified.P

Voltage:

- 120 V ac.....A
- 240 V ac.....B
- 24 V ac.....C
- None. Select with Chart Drive code PX

Frequency:

- 50 Hz5
- 60 Hz6
- None. Select with Chart Drive code P.....0

Optional Feature:

- 3 alarm lamps, externally operated. Available with Voltage code C above onlyL

2) SPECIFY INPUT SIGNAL _____

3) SPECIFY SCALE RANGES AND CHART RANGES FROM CHART AND DIAL
CATALOG 600 _____

4) SPECIFY MOUNTING EQUIPMENT—102 OR 101 SERIES SHELVES _____

5) SPECIFY OPTIONAL FEATURES _____

6) SPECIFY INFORMATION FOR NAMEPLATE AND INSTRUMENT TAG _____

110



The 110 Series Pneumatic CONSOTROL Indicators indicate 1, 2, or 3 process measurements received as proportional pneumatic signals from remote transmitters.

110 SERIES PNEUMATIC CONSOTROL INDICATORS

■ Simple Construction

- No cables, clutches, or complicated mechanisms.
- Ball and socket connectors for frictionless linkage.

■ Bold, Readable Display

- Large, brightly colored pointers.

■ Easy Calibration

- Indicator partially slides out of shelf.
- Adjustments made at front end of panel.

■ Integral Recording

- Optional circular chart recording mechanism.

■ Versatile Mounting

- Singly or with other instruments in 102 or 101 Series Shelves.

For complete specifications, refer to General Specification Sheet GS 2B-3D1 A.

Functional Specifications

Element:

One brass bellows per variable.

Damping:

Integral and adjustable.

Input Signal:

20 to 100 kPa or 3 to 15 psi, as specified.

Scale:

Vertical. Effective length 100 mm (4 in). Black figures on clear plastic, scaled as specified.

Pointers:

Red, green, blue.

Ambient Temperature Limits:

-20 and +65°C (0 and 150°F).

Performance Specifications

Accuracy:

±0.5% of calibrated span.

Repeatability:

0.25% of calibrated span.

Dead Band:

Less than 0.1 % of calibrated span.

Physical Specifications

Mounting:

Flush in panels 3 to 25 mm (0.13 to 1 in) thick using 102 or 101 Series Shelves. Indicators require 1 unit width of mounting capacity.

Connections:

Electrical and pneumatic multiprong receptacles on rear of chassis.

Nameplate:

White translucent plastic with 2.5 mm (0.1 in) high black characters. Maximum of 2 lines, 17 characters or spaces per line.

Overall Dimensions:

165 mm high x 71 mm wide x 554 mm deep (6.5 in high x 2.8 in wide x 21.8 in deep).

Optional Features

Chart Record:
Single variable indicators only may be furnished with an integral recording mechanism to provide a continuous record on a nominal 125 mm (5 in) circular chart with 50 mm (2 in) wide recording area. Electrical 2-speed chart drive, 24 h/24 min/off or 7 day/2.8 h/off rotation, as specified. Supply voltage 24, 120, or 240 V ac, 50 or 60 Hz, as specified. 24 V ac must be specified when alarm option is used. Foxboro and CSA certified for ordinary and Class I, Groups C and D, Division 2 hazardous locations. CSA certified units, Source - Canada. Maximum angle mounting is 15 degrees from vertical.

Alarm Actuators, Alarm Lamps, and Flasher System:
Refer to Page 82.

How to Order

1) SPECIFY MODEL NUMBER:

One Variable	111
Two Variables.....	112
Three Variables.....	113

- 2) SPECIFY INPUT SIGNAL _____
- 3) SPECIFY SCALE RANGES—REFER TO CHART AND DIAL CATALOG 600 _____
- 4) SPECIFY MOUNTING EQUIPMENT—102 OR 101 SERIES SHELVES _____
- 5) SPECIFY OPTIONAL FEATURES _____
- 6) SPECIFY NAMEPLATE AND INFORMATION FOR INSTRUMENT TAG _____




135 Series Stations are complementary auxiliary units for 100 Series Control Systems.

135 SERIES MANUAL
LOADING, SWITCHING, AND
BIAS STATIONS

- Selective Pneumatic Switching
- Remote Control Setting
- Manual Loading of Final Operators

For complete specifications, refer to General Specification Sheet GS 2B-4H2 A.

Functional Specifications

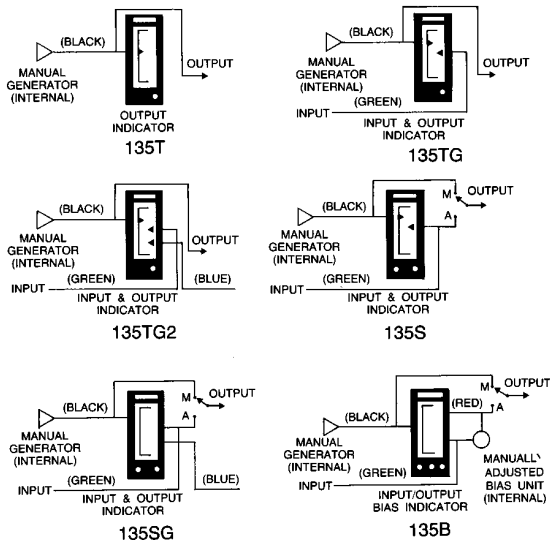

Model 135T:
Provides an accurate manually adjusted standard output signal used for remote manual control of final operators or for the remote setting of any pneumatic receiver. A manual adjusting knob regulates a stable standard output indicated on a 100 mm (4 in) vertical scale.

Model 135TG:
Performs the same function as the Model 135T (above). An additional pointer is provided to display a standard input signal.

Model 135TG2:
Performs the same function as the Model 135T. Two additional pointers are provided to display standard input signals.

Model 135S:
Passes a standard input signal to a final operator or manually generates an accurate standard signal. It is normally used in control loops where a single master controller regulates two or more final operators. The station contains a vertical scale, indicating the input signal and the output of the manual generator. By matching the two indicators on the vertical scale and flipping the simple 2-position transfer switch, a bumpless transfer is ensured.

Model 135SG:
Performs the same function as the Model 135S (above). An additional pointer is provided to display a standard input signal.

Model 135B:
Performs the same functions as the Model 135S with the added feature that up to $\pm 100\%$ bias may be manually added to the standard input signal. It is normally used where a single master controller regulates two or more final operators, or where it remotely sets two or more controllers, and where it is necessary to bias one with respect to the other. This unit has three pointers. One is used to indicate the manually generated signal and the other two indicate the input signal before and after it is biased.

Ambient Temperature Limits:
-20 and +65°C (0 and 150°F).

Input/Output Signal and Supply Pressure:

Input/Output Signal	Supply Pressure
20 to 100 kPa	140 to 150 kPa
3 to 15 psi	20 to 22 psi

Performance Specifications

Receiver-Indicator:

Accuracy: ±0.5% of calibrated span.
Repeatability: 0.25% of calibrated span.
Dead Band: Less than 0.1% of calibrated span.

Manual Output Pointer:

Output Indicator: 0.5% of calibrated span.
Repeatability of Setting: 0.25% of calibrated span.

Physical Specifications

Element:

Brass bellows.

Scale:

100 mm (4 in) vertical, black markings on white background.

Pointers:

Manual output: black.
Bias output: red.
Inputs: green and blue.

Connections:

Electrical and pneumatic multiprong receptacles on rear of chassis.

Nameplate:

White translucent plastic with 2.5 mm (0.1 in) high black letters. Maximum of 2 lines, 17 letters or spaces per line.

Mounting:

Flush in panels 3 to 25 mm (0.13 to 1 in) thick using 102 or 101 Series Shelves. Units require 1 unit of

Optional Features

Alarm Actuators, Alarm Lamps, and Flasher

System:

Refer to Page 82.

How to Order

1) SPECIFY MODEL NUMBER:

Manual Loading	135T
Manual Loading with Variable Indicator	135TG
Manual Loading with Two Variable Indicators	135TG2
Automatic/Manual Switching.....	135S
Automatic/Manual Switching with Variable Indicator	135SG
Automatic/Manual Switching and Bias.....	135B

- 2) SPECIFY INPUT AND OUTPUT SIGNALS _____
- 3) SPECIFY SCALE RANGES—REFER TO CHART AND DIAL CATALOG 600 _____
- 4) SPECIFY MOUNTING EQUIPMENT—102 OR 101 SERIES SHELVES _____
- 5) SPECIFY OPTIONAL FEATURES _____
- 6) SPECIFY INFORMATION FOR NAMEPLATE AND INSTRUMENT TAG _____

556, 557



Units provide output proportional to mathematical function of input. Model 557 performs square root function only.

556 SERIES AND MODEL 557
PNEUMATIC ANALOG
COMPUTERS

- **Versatile**
 - multiply.
 - divide.
 - square.
 - square root.
- **Wide Range of Applications**
 - flexible scaling for multiplication and division.
- **Built-in Function Switch**
 - to select any of four computing functions.
- **Weatherproof**
 - plastic cover.
 - die-cast, low copper content aluminum alloy manifold.
 - IEC IP53 and NEMA Type 3.

For complete specifications, refer to Product Specification Sheets PSS 2B-5E1 A and B.

Functional Specifications

Functions and Related Equations:

The 556 Series performs any one of four functions and solves an equation as shown in the table. The 557 performs square root only.

Function	Equation
Multiplication	$A = fB(z + sC)$
Division	$B = \frac{A}{(f)(z + sC)}$
Square Root	$B = \sqrt{A}$
Square	$A = C^2$

A, B, and C are pneumatic signals expressed as decimal equivalents of percent of span.

f = Scaling factor (limits: 0.750 and 3.500).

s = Span factor for C signal (limits: 0.050 and 1.000).

z = Zero suppression of C signal (limits: 0.000 and 0.950).

NOTE: The sum of s and z must equal 1.000.

Input and Output Signals:

20 to 100 kPa or 3 to 15 psi, as specified.

Supply Pressure Limits:

130 and 150 kPa or 19 and 22 psi.

Ambient Temperature Limits:

-40 and +80°C (-40 and + 180°F).

Air Consumption Under Normal Operation:

<.10 m³/h (.06 scfm) at standard conditions.

Air Connections:

All air connections are tapped for 1/4 NPT.

Mounting:

A bracket is supplied for vertical mounting on a rack or DN 50 or 2 in pipe. The bracket is designed for either horizontal or vertical pipes or rack struts.

Performance Specifications

Accuracy:

Multiplication: ±0.5% of output span referred to input.

Division: ±0.5% of output span referred to input.

Square Root:

556: ±0.25% of output span referred to input.

557: ±0.5% of output span referred to input.

Square: ±0.5% of output span.

Repeatability:

0.1 % of output span.

Physical Specifications

Materials of Construction:

Cover: Molded plastic with textured gray finish.

Manifold: Low copper content aluminum alloy die-casting with a gray epoxy finish.

Flexures: 17-4 PH stainless steel.

A and C Bellows: Brass.

B Diaphragm: Copper alloy.

Environmental Protection:

The housing construction is weatherproof. It is dust-protected as defined in IEC IP53 and provides the environmental protection of NEMA Type 3.

How to Order

1) SPECIFY MODEL NUMBER:

Function	Formula
Multiplication	$A = fB(z+sC)$
Division	$B = A/f(z + sC)$
Square Root (a)	$B = \sqrt{A}$
Square	$a + C^2$
Square Root	$B = \sqrt{A}$

.....	556-8
.....	556-9
.....	556-10
.....	556-11
.....	557

(a) Refer also to Model 557, and accuracy statement in "PERFORMANCE SPECIFICATIONS".

2) SPECIFY INPUT/OUTPUT RANGE IN PROCESS UNITS _____

3) SPECIFY FOR MODELS 556-8 AND 556-9:

SUPPLY THE VALUE OF f, s, AND z _____

DEFINE INPUT/OUTPUT SIGNAL RANGE DESIRED, kPa OR psi _____

4) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

Panel Mounted Pneumatic Instruments (*Miscellaneous*)

130MD, 130PD, 130FD, 138, 130M-N, 102, 101, 120

130MD, 130PD, AND 130FD SERIES PNEUMATIC CON- SOTROL CONTROL STATIONS



130MD, 130PD, and 130FD Series Pneumatic CONSOTROL Control Stations provide panel mounted measurement, set point, and auto/manual transfer functions to operate separately mounted controllers. The stations are used with the 138 Series Controllers to minimize time lag resulting from long distances between control panels and the process.

138 SERIES REMOTE MOUNTED PNEUMATIC CONTROLLERS



138 Series Remote Mounted Pneumatic Controllers are used with 130MD, 130PD, and 130FD Series Control Stations. They provide the response advantage of a local controller with the convenience of a panel mounted display.

130M-N SERIES PNEUMATIC CONSOTROL INDICATING GAP CONTROLLERS



The Model 130M-N7 Differential Gap Controller is an on/off unit with an adjustable inert zone (gap) within which the controller will not respond to changes in the measurement.


The Model 130M-N94 Gap Action Floating Controller provides standard proportional plus integral control action when the measurement exceeds the high or low gap limit.

102 AND 101 SERIES PNEUMATIC CONSOTROL SHELVES




102 and 101 Series Pneumatic CONSOTROL Shelves allow flush panel mounting of pneumatic CONSOTROL instruments in panels. They are compact units, available in ten sizes for one to ten instruments. The shelves allow instruments to be wholly or partially withdrawn without interfering with the operation of others.

120 SERIES PNEUMATIC CONSOTROL RECORDERS



120 Series Pneumatic CONSOTROL Recorders record up to four process measurements received as standard pneumatic transmission signals from remote transmitters. Large, brightly colored pens clearly indicate the measurement. The recording is on a SCAN-FOLD chart.

ALARM ACTUATORS, ALARM LAMPS, AND FLASHER SYSTEM

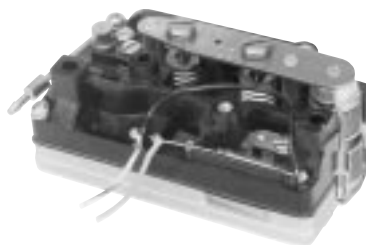

100 Series Pneumatic Alarm Actuators are available integrally mounted in CONSOTROL 100 instruments. The actuators are operated directly by the pneumatic input signals. They provide high sensitivity, accuracy, and dependability by eliminating intermediate receiver mechanisms. A wide variety of alarm configurations is available.

CONVERTERS

Many processes require both electronic and pneumatic instrumentation. Converters allow you to integrate that combination into your control strategy.

Foxboro makes converters for both purposes:

CURRENT-TO-PNEUMATIC (I/P) E69 SERIES

- Available with a selection of input/output signals.
- Small, compact, lightweight—for easy installation.
- High air delivery rate for direct valve actuation.

PNEUMATIC-TO-CURRENT (P/I) 892 SERIES

- Low installation costs with dedicated field-mounted configurator.
- Small-sized and lightweight for optimum ease of retrofit.
- Dual compartment housing for wiring simplicity.
- Usable in Division 1 or 2 areas.

E69, E69R



E69F and E69R Series Current-to Pneumatic Converters accept a dc milliampere input signal and convert to a proportional pneumatic output signal.

E69F AND E69R SERIES
CURRENT-TO-PNEUMATIC
CONVERTERS

- **Light, Compact**
 - easy to install.
- **Low Air Consumption**
 - reduced operation costs.
- **High Air Capacity**
 - eliminates need for volume boosters.
- **Choice of Various Input and Output Signals**
 - suitable for all applications.
- **Sealed Air Purged Case (E69F)**
 - long term dependability in dirty environments.
- **Precise Performance**

For complete specifications, refer to Product Specification Sheets PSS 4-8B1 A (E69F) and 2B-2A2 A (E69R).

Functional Specifications

Input Signal Ranges (mA dc):

4 to 20, 4 to 12, 12 to 20.
10 to 50, 10 to 30, 30 to 50.

Output Signal Ranges:

20 to 100 kPa or 3 to 15 psi.
40 to 200 kPa or 6 to 30 psi.
3 to 27 psi.
7 to 125 kPa or 1 to 18 psi.
7 to 220 kPa or 1 to 32 psi.

Input Impedance:

170 Ω (4 to 20 mA dc).
27 Ω (10 to 50 mA dc).

Supply Pressure: (a)

Nominal	Limits
140 kPa or 20 psi 240 kPa or 35 psi	130 and 160 kPa or 19 and 23 psi 225 and 260 kPa or 33 and 38 psi

a) Not less than 20 kPa or 3 psi above maximum output.

Electrical Classification:

FM, CSA, CENELEC and SAA certified. Explosion proof and intrinsically safe versions available. Refer to Foxboro for complete specifications.

Physical Specifications

Accuracy:

Output Signal codes 2 and 3: $\pm 1.0\%$ of calibrated span.

Output Signal codes 7 and 8: $\pm 2\%$ of calibrated span.

Linearity:

0.5% of calibrated span typical.

Repeatability:

0.25% of calibrated span typical.

E69F

Enclosure:

Die-cast copper (1 % maximum) aluminum alloy body and cover (ASTM 512A and 512B), with a

vinyl or epoxy powder finish. Meets the requirements of IEC IP65 and provides the environmental protection of NEMA Type 4.

Mounting:

Valve yoke, surface, or DN 50 or 2 in pipe. Calibrated for vertical mounting unless otherwise specified. Bracket is supplied as standard.

Input/Output Connections:

Electrical: Tapped 1/2 in for conduit fitting to connect to a pair of 0.5m (18 in) long 18 AWG (1.0 mm²) twisted leads.

Pneumatic:

1/4 NPT for air supply and output signal.

Physical Specifications (continued)

E69R**Enclosure:**

Die-cast aluminum front and back plates with extruded top and bottom rails and steel side covers. Finish is vinyl, polyurethane, or acrylic enamel.

Mounting:

Up to 6 units may be mounted across in a 483 mm (19 in) rack.

Input/Output Connections (on front panel):

Electrical: Screw terminal with terminal cover.

Pneumatic: 1/4 NPT for air supply and out signal.

Optional Features

Alternative Output Signal:

Refer to Foxboro for other than standard output signals.

Adjustable Filter Regulator (E69F):

Provided without gauge.

Supply (Input) and Output Pressure Gauges (E69F):

Mounted integral to converter.

Explosionproof Junction Box (E69F):

Mounted integral to converter. PG 11 Cable Gland (Trumpet Connector) for nonexplosionproof applications.

Miniature Junction Box (E69F):

Consists of an aluminum box, 64 x 58 x 33 mm (2.5 x 2.3 x 1.3 in), and meets the IEC/ IP65 requirements and the environmental protection of NEMA Type 4. Provided with 1/2 in conduit, 20 mm threaded hole, or PG 11 or PG 13.5 Trumpet Type Cable Connectors.

Assembled to Valve Actuator by Foxboro (E69F).

How to Order

1) SPECIFY MODEL NUMBER: E69F-**Housing:**

Bolted cover (weatherproof)B
Threaded cover (explosionproof)T

Input Signal (a), (b) and Impedance:

4 to 20 mA dc (170 Ω)I
10 to 50 mA dc (27 Ω)H

Output Signal (c):

kPa	psi	
20 to 100	3 to 152
40 to 200	6 to 303
—	3 to 273
7 to 125	1 to 187
7 to 220	1 to 328
Other	X

Optional Features:

Explosionproof junction boxJ
Adjustable filter regulator without gaugeR
Supply/output gaugesS
Miniature junction box (1/2 in conduit connector) - front entry (d)M
Miniature junction box (1/2 in conduit connector) - rear entry (d)P

a) Converter action may be direct or reverse. (Specify.)

b) Input signal may be split-ranged (i.e., 4 to 12 mA). (Specify.)

c) When ordering valves not employing valve positioners, specify code 7 or 8 depending on the actuator spring range.

d) Cannot be used with Electrical Classification CSE/LDE.

This product and its components are protected by U.S. Patent 4,213,478. Corresponding patents have been issued or are pending in other countries.

HOW TO ORDER Continued on Next Page.

How to Order (continued)

1) SPECIFY MODEL NUMBER: E69R-

Housing:

Input Signal (a), (b) and Impedance:

4 to 20 mA dc (170 Ω)I
10 to 50 mA dc (27 Ω)H

Output Signal (c):

kPa	psi		
20 to 100	3 to 15	2
40 to 200	6 to 30	3
—	3 to 27	3
7 to 125	1 to 18	7
7 to 220	1 to 32	8
Other		X

- a) Converter action may be direct or reverse. (Specify.)
b) Input signal may be split-ranged (i.e., 4 to 12 mA) (Specify.)
c) When ordering valves not employing valve positioners, specify code 7 or 8 depending on the actuator spring range.

- 2) SPECIFY DIRECT OR REVERSE ACTION _____
3) SPECIFY OUTPUT SIGNAL _____
4) SPECIFY ELECTRICAL CLASSIFICATION _____
5) SPECIFY OPTIONAL FEATURES _____
6) SPECIFY INFORMATION FOR INSTRUMENT TAG _____

892 SERIES PNEUMATIC-TO-CURRENT CONVERTERS

892

■ High Performance

- Ideal computer interface on existing pneumatic loops.
- Can interface between pneumatic transmitters and electronic control equipment up to 1.6 kilometres (1 mile) away.

■ Intrinsically Safe

- Agency certified.

■ Compact

- Rack design allows horizontal, vertical, or integral mounting.

■ Weatherproof

- Field mounted enclosure is both sealed and durable.



The 892 Series Pneumatic-to-Current Converters receive a standard pneumatic signal and transmit a proportional 4 to 20 mA dc signal.

For complete specifications, refer to Product Specification Sheet PSS 2A-2A3 A.

Functional Specifications

Input Signals:

See "HOW TO ORDER."

Ambient Temperature Limits:

-28 and +80°C (-20 and + 180°F).

Electrical Classification:

FM, CSA, and BASEEFA certified. Division 2 and Division 1 intrinsically safe versions available. Refer to Foxboro for complete specifications.

Power Requirements:

Requires external dc power for operation. See "Output Signal" table below.

Output Signal:

Output Signal	Supply Voltage From Separate Unit (V dc)			Allowable Loop Load (ohms) at Nominal Supply Voltage	
	Min.	Nom.	Max.	Min.	Max.
4 to 20 mA dc	12.5	24	36	0	1175

Performance Specifications

Accuracy:

±0.25% of calibrated span.

Physical Specifications

Connections:

Electrical: Screw terminal.

Pneumatic: 1/4 NPT.

Conduit: 1/2 NPT both sides.

Mounting:

Field. Nominal DN 50 (2 in) pipe with mounting bracket.

Enclosure Classification:

Meets IEC IP66 and NEMA Type 4X.

How to Order

1) SPECIFY MODEL NUMBER: 892-

Input Signal:


3 to 15psi	2
3 to 27psi	3
0.2 to 1.0 kg/cm2	4
20 to 100 kPa	5
0.2 to 1.0 bar	6

Optional Feature:

Delete mounting bracket	Y
-------------------------------	---

2) SPECIFY INFORMATION FOR INSTRUMENT TAG_____

2A SERIES CYLINDER ACTUATOR WITH POWER POSITIONER

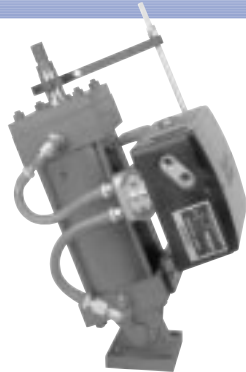


The 2A Series Cylinders are used to actuate dampers, gates, shutters, doors, and large control valves. Power positioners are required with all pneumatic cylinders for throttling action. They convert the standard 20 to 100 kPa (3 to 15 psi) controller signal to full supply pressure on the cylinder piston and assure precise, positive positioning. Cylinders are available in bore sizes 83 through 355 mm (3 1/4 through 14 in) with strokes up to 810 mm (32 in).

E69P SERIES CURRENT-TO-PNEUMATIC VALVE POSITIONERS



The E69P Series Current-to-Pneumatic valve Positioner converts a direct current milliamper input signal into a pneumatic output signal for positioning control valve actuators. It eliminates the need for a separate converter and a separate positioner. It is available with the following input signal ranges (mA): 4 to 20, 4 to 12, 12 to 20, 10 to 50, 10 to 30, 30 to 50 with a corresponding output signal of up to 240 or 420 dPa (35 or 60 psi, 2.4 or 4.2 bar or kg/cm²).

MODELS 20F/P50 AND 30C/P110 DIAPHRAGM LEVER ACTUATORS

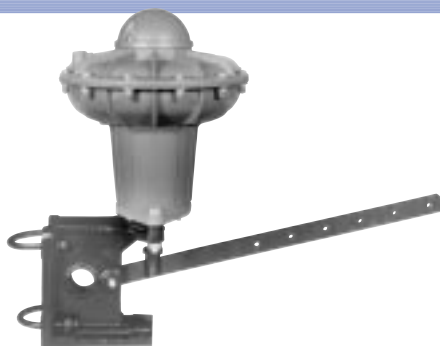

The Models 20F/P50 and 30C/P110 Diaphragm Lever Actuators are used to actuate dampers, gates, and butterfly valves. The topworks of the size P50 and P110 Diaphragm Actuators are made of vinyl-coated, die-cast aluminum. Maximum input pressure is 420 kPa (60 psi). Bracket material is cast iron, and the carbon steel lever is predrilled. Lever strokes range from 116 to 254 mm (4.56 to 10 in).

P SERIES PNEUMATIC SPRING DIAPHRAGM ACTUATORS



The P Series Actuators can operate a variety of control valves, dampers, louvers, and gates. They are lightweight field-reversible units with low hysteresis and fast, precise response.

Model	Maximum Stroke		Effective Area		Material Construction
	mm	in	m ²	in ²	
P25	19	3/4	0.016	25	aluminum
P50	38	1 1/2	0.032	50	with cast iron yoke
P110	57	2 1/4	0.071	110	
P30	19	3/4	0.021	32	steel with cast iron yoke
P60	19	3/4	0.035	54	

Nominal input signal: 20 to 100 or 40 to 200 kPa (3 to 15 or 6 to 30 psi).

Humitex Circular and Strip Charts

Foxboro recording charts complement the precision and fine craftsmanship of our wide range of recording instruments. Charts combine the essential elements of special high-quality paper with rigidly controlled printing and trimming procedures. Over 17,000 different charts can be supplied in ranges and calibrations to meet the requirements of practically any process recording application. Special charts and new ranges not listed in the Chart Catalog and Dial List (Catalog 600) may require a new electro printing plate for specific customer needs. Contact our nearest Branch Office for Catalog 600.

Chart Purchase Agreement

Any Foxboro instrument user with an estimated yearly requirement of 500 boxes of circular and/or 500 boxes of strip charts or more may request a Chart Purchase Agreement. Under the agreement system, quantity prices are applied to the individual chart purchase order. The agreement is continuous, reviewed yearly for actual purchases, and a 30-day advance notice to changes is given. Refer to Foxboro with your annual requirements to receive a Chart Purchase Agreement.

Minimum Order Quantity—15 boxes of circular charts or 15 boxes of strip charts.

Toll Free Number

To order charts, call 888-FOXBORO (888-369-2676).

Types of Calibration Charts Available for Circular and Strip Charts

Uniform, Differential Pressure, Flow (Type 27), Vacuum Pressure, Square Root, Vapor Pressure, Dairy Charts, Dew Point, Thermocouple, Thermopile, Flow-Open Channel Weir and Flume, Log Function, Specific Gravity, and Balsbaugh.

Circular Chart Specifications

Standard circular charts are printed with gray ink, 1 side only, on 0.122 mm (0.0048 in) thick paper. Circular charts with heavy paper are printed on 0.178 mm (0.0070 in) paper. Charts are packaged 100 to a box.

Instrument	Chart Size
125 mm (5 in) Side-Mounted Recorder	125 mm (5 in) (a)
12 Series Recorders	300 mm (12 in)
40/740 Series Recorders	300 mm (12 in)
39A Series Flow Recorders	300 mm (12 in) (a)
39 B Series Flow Recorders	MW Series
	300mm (12in)(a)
740R Series Recorders	300 mm (12 in)

a) Always printed on heavy paper.

Foxboro also prints circular charts for American Meter, Arcco-Anubis, Bailey, Bristol, Gotham (Ametek), Honeywell (Brown), Mercury, Palmer, Ranarex (Permutit), Rockwell, Taylor, UGC Industries, Warren Controls (Tagliabue), and Weksler which are made to their specifications.

Options for 300 mm (12 in) Circular Charts:

Description	Code (b)
Heavy Paper	-HP
Backprinting (c)	-BP
Mullins Slotting (d)	-MS-HP
Read-Out Holes (e)	-ROH-HP
Tejas Chart Changer Hole	-TCH-HP
Overprinting of Two-Color Charts (f)	-OP
Color of Ink on Chart:	
Green	-GRN
Scanner Blue Ink	-BLU-SBI
Black	-BLK
Aqua	-AQUA
Dark Blue	-DBLU
Shrink Wrap	-SW

- b) Add as suffix to circular chart number.
- c) Add Foxboro backprint number.
- d) Specify drop time and/or day of the week.
- e) Specify time.
- f) Must be available as an existing chart; see Catalog 600.

Humitex Circular and Strip Charts

Strip Chart Specifications

4 in Roll, 100 mm Roll, and SCAN-FOLD charts can be supplied with or without time mark numbering. Standard time mark numbering is the hour of the day printed on the left side of the chart at 2-hour intervals (on the even hour). The standard speed for the 4 in Roll and SCAN-FOLD is 3/4 in/h which coincides with the chart drive speed. The standard speed for the 100 mm Roll is 20 mm/h.


A large selection of non-standard time mark numbering is available to match the chart speeds of your recorders. Refer to Catalog 600 for a listing.

4 in Roll ChartOne 30-day chart per box
 100 mm Roll ChartOne 30-day chart per box
 SCAN-FOLD ChartTwo 16-day charts per box

Recorders	Chart
E20S 53 54 64 120 220S	<u>4 in Roll or SCAN-FOLD</u> For 4 in Roll, specify chart number suffix -T if time numbering is required. For SCAN-FOLD, specify chart number suffix -6TX if time numbering is required.
E27R 126S 127S 226S 227S 760R	<u>100 mm Roll only</u> Specify chart number suffix -T if time numbering is required.
761R	L0120NP
762R	Fold - L0122RQ 50 Divisions - L0122RS 0-100 Linear Roll - L0122RR 50 Divisions - L0122RT 0-100 Linear
751R	Fold - L0122RS 0-100 Linear Roll - L0122RT 0-100 Linear

Pens and Pen Arms

- Large, Disposable, Fiber Tip Pens for Circular Chart Recording Instruments
- Designed to Write 365 metres (1200 feet)
- Prepackaged 6 Pens per Card

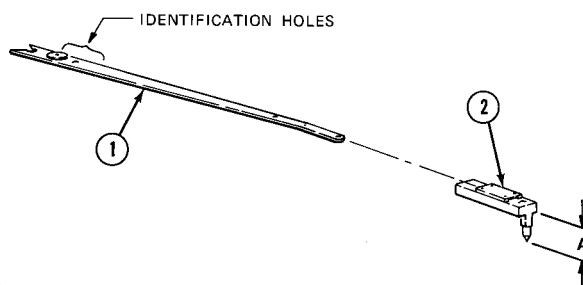

Recorders

40, 40M, 40P, and 39 Series Rectangular Case Recorders:

Pen Location	Pen Arm, Item 1		Fiber Tip Pens (Package of 6), Item 2			
	Part Number	Identification Holes	Color	Part Number	A-Length	
					mm	in
1-Pen	0044897	2	Red	L0121CH	12	0.47
2-Pen						
inner	M0122AC	1	Violet	L0121CM	6	0.24
outer	0044897	2	Red	L0121CH	12	0.47
3-Pen						
inner	M0122AC	1	Violet	L0121CM	6	0.24
center	0044897	2	Red	L0121CH	12	0.47
outer	M0122AB	3	Green	L0121CU	18	0.71
4-Pen						
inner	M0122AC	1	Violet	L0121CM	6	0.24
next to inner	0044897	2	Red	L0121CH	12	0.47
next to outer	M0122AB	3	Green	L0121CU	18	0.71
outer	M0122AA	0	Blue	L0121DA	24	0.94

12R Series Round Case Recorders:

Pen Location	Pen Arm, Item 1		Fiber Tip Pens (Package of 6), Item 2			
	Part Number	Identification Holes	Color	Part Number	A-Length	
					mm	in
1-Pen	0044899	2	Red	L0121CH	12	0.47
2-Pen						
outer	0046965	3	Violet	L0121CR	6	0.24
inner	0044899	2	Red	L0121C J	12	0.47

12RD (1 to 3 Pen) and 12RM (1 and 2 Pen) Series Round Case Recorders:

Pen Location	Pen Arm, Item 1		Fiber Tip Pens (Package of 6), Item 2			
	Part Number	Identification Holes	Color	Part Number	A-Length	
					mm	in
1-Pen	0044899	2	Red	L0121CT	18	0.71
2-Pen						
inner	0046964	1	Violet	L0121CR	12	0.47
outer	0044899	2	Red	L0121CT	18	0.71
3-Pen						
inner	M0122NE	0	Violet	L0121CR	12	0.47
center	0046964	1	Red	L0121CT	18	0.71
outer	0044899	2	Green	L0121CZ	24	0.94

Pens and Pen Arms (continued)

Recording Controllers

40, 40M, and 40P Series Rectangular Case Recording Controllers:

Controller Type	Pen Location	Pen Arm/Index, Item 1		Fiber Tip Pens (Package of 6), Item 2			
		Part Number	Identification Holes or Color	Color	Part Number	A-Length	
						mm	in
Single Action	1-Pen Index	0044897 0032301	2 Plain	Red	L0121CH	12	0.47
Single Action with Additional Pen	2-Pen inner outer Index	M0122AC	1	Violet	L0121CR	12	0.47
		0044897 M0122LT	2 Red	Red	L0121CT	18	0.71
Single Action with 2 Additional Pens	3-Pen inner center outer Index	M0122AC	1	Violet	L0121CR	12	0.47
		0044897	2	Red	L0121CT	18	0.71
		M0122AB	3	Green	L0121CZ	24	0.94
		M0122LT	Red				
Triple Setting	1-Pen Index inner center outer	0044897	2				
		M0122LS	Violet	Red	L0121CY	24	0.94
		M0122LT M0122MA	Red Green				
Ratio	2-Pen inner outer Index	M0122AC	1	Violet	L0121CR	12	0.47
		0044897 M0122LS	2 Violet	Red	L0121CT	18	0.71
Ratio with inner Additional Pen	3-Pen inner center outer Index	M0122AC	1	Violet	L0121CR	12	0.47
		0044897	2	Red	L0121CT	18	0.71
		M0122AB	3	Green	L0121CZ	24	0.94
		M0122LS	Violet				
Duplex	1-Pen Index inner outer	0044897	2				
		M0122LT M0122LS	Red Violet	Red	L0121CT	18	0.71
Auto-Selector, Dual, or Duplex with Additional Pen	2-Pen inner outer Index inner outer	M0122AC	1				
		0044897	2	Red	L0121CT	18	0.71
		M0122LT	Red	Violet	L0121DB	24	0.94
		M0122LS	Violet				

1. On multiple pen recorders, if pens L0121CR (Violet), L0121CS (Black), L0121CP (Green), or L0121CQ (Blue) are used as arcing pens, then the red inner pen (L0121CJ) must be used. Its length is 6 mm (0.24 in).
2. Black pens may be substituted for red or violet as follows:
Use L0121CN for pen arm lengths of 6 mm (0.24 in)
Use L0121CS for pen arm lengths of 12 mm (0.47 in)
3. If replacing box pens with fiber tip pens, the color dot on the pen arm (Item 1 in drawing on preceding page) must be removed.

Disposable Fiber Tip Pen Cartridges for 40P/40M/12 and 740 Chart Recorders:

A-Length		Red	Violet	Green	Blue	Black
mm	in					
6	0.24	L0121CJ	L0121CM	L0121CK	L0121CL	L0121CN
12	0.47	L0121CH	L0121CR	L0121CP	L0121CQ	L0121CS
18	0.71	L0121CT	L0121CW	L0121CU	L0121CV	L0121CX
24	0.94	L0121CY	L0121DB	L0121CZ	L0121DA	L0121DC

RELATED OFFERINGS




I/A SERIES SYSTEMS

I/A Series Systems from Foxboro have the advanced, open industrial packaging, software, control capabilities, operation, information structure, and application tools to provide the extended functionality, the flexibility, and the open architecture you need to automate your entire plant. Contact your Foxboro representative for more information or call 1-888-FOXBORO.



TRICONEX CORPORATION

Triconex Corporation is the world's leading manufacturer of TMR fault-tolerant control systems. Typical applications include emergency shutdown, burner management, turbomachinery control, and fire and gas systems. For additional information, call 1-714-699-2100.



SIEBE ENVIRONMENTAL CONTROLS

Siebe Environmental Controls manufactures a complete line of facility management systems and HVAC control components that provide interoperable building management solutions to help industry maximize operation efficiency and deliver effective building comfort and energy control to commercial, institutional, and industrial buildings worldwide. For additional information, call 1-815-637-3000.



BARBER-COLMAN COMPANY INDUSTRIAL INSTRUMENTS DIVISION

The Barber-Colman Company is a manufacturer and distributor of specialized electronic control components and systems for plastics machinery, heat treating furnaces, and industrial and commercial thermal process control applications. For additional information, call 1-800-232-4343 for the name of the representative office located near you.

SIEBE CONTROL VALVES DIVISION

Siebe Control Valves Division offers a broad line of control valves with the superior efficiency of a single source. Uniting valves from respected global manufactures Eckardt, NAF, Gestra/UNIVAM, P& W, and Schmidt with intelligent automation systems from Foxboro can provide true total information integration. Ask your Foxboro representative for Catalog 620 or call 1-888-FOXBORO.



FOXBORO ELECTRONIC INSTRUMENTS

Foxboro offers an extensive array of electronic measurement and control instruments. Ask your Foxboro representative for Catalog 630 or call 1-888-FOXBORO.



FOXBORO ENVIRONMENTAL MONITORING

Foxboro offers a wide choice of portable and stationary environmental monitoring equipment to meet the safety and regulatory needs of industry. Ask your Foxboro representative for Bulletin K56 or call 1-508-378-5556.



THE FOXBORO TRAINING INSTITUTE

The Foxboro Training Institute starts where others leave off. From simple maintenance to sophisticated applications, we can teach you everything you need to know about process control. Classroom courses and seminars are offered both at our Massachusetts headquarters and at selected field locations around the world. For further details, ask your Foxboro representative for Catalog 700 or call 1-800-682-0022.



TRADEMARKS

Alumel is a trademark of Hoskins Manufacturing Company.
Aminco is a trademark of American Instrument Company.
Bakelite is a trademark of Union Carbide Corporation.
Carpenter is a trademark of Carpenter Technology Corporation.
Chromel is a trademark of Hoskins Manufacturing Company.
Dacron is a trademark of E. I. duPont de Nemours & Company, Inc.
Duranickel is a trademark of Huntington Alloys, Incorporated.
Fluorinert is a trademark of 3M Company.
Fluorolube is a trademark of Hooker Chemical Corporation.
Grafoil is a trademark of Union Carbide Corporation.
Hastelloy is a trademark of Stellite Division of Cabot Corporation.
HART is a trademark of the HART Foundation
Inconel is a trademark of Huntington Alloys, Incorporated.
Kel-F is a trademark of 3M Company.
Kynar is a trademark of The Pennwalt Corporation.
Linatex is a trademark of Wilkinson Process Rubber, Ltd.
Monel is a trademark of Huntington Alloys, Incorporated.
Ni-Span is a trademark of Huntington Alloys, Incorporated.
Noryl is a trademark of The General Electric Company.
Ryton is a trademark of Phillips Petroleum Company.
Teflon is a trademark of E. I. duPont de Nemours & Company, Inc.
Tefzel is a trademark of E. I. duPont de Nemours & Company, Inc.
TriClamp is a trademark of Ladish Company.
Viton is a trademark of DuPont Dow Elastomers L.L.C.
17-4 PH is a trademark of Armco Steel Corporation.
17-7 PH is a trademark of Armco Steel Corporation.
SIEBE is a trademark of Siebe plc

The following are trademarks of The Foxboro Company:

CONSOTROL
DEWCEL
d/p Cell
DYNATHERM

FOXBORO
HUMITEX
SCANFOLD

The Intelligent Automation People is a Service Mark of The Foxboro Company.

CORPORATE HEADQUARTERS

**The Foxboro Company
33 Commercial Street
Foxboro, Massachusetts 02035-2099
U.S.A.**

Foxboro is a multinational company with manufacturing, engineering, sales, service, and application support facilities located throughout the world. Foxboro is a part of the Siebe Controls division of SIEBE plc of Windsor, U.K.

Your Foxboro representative:

