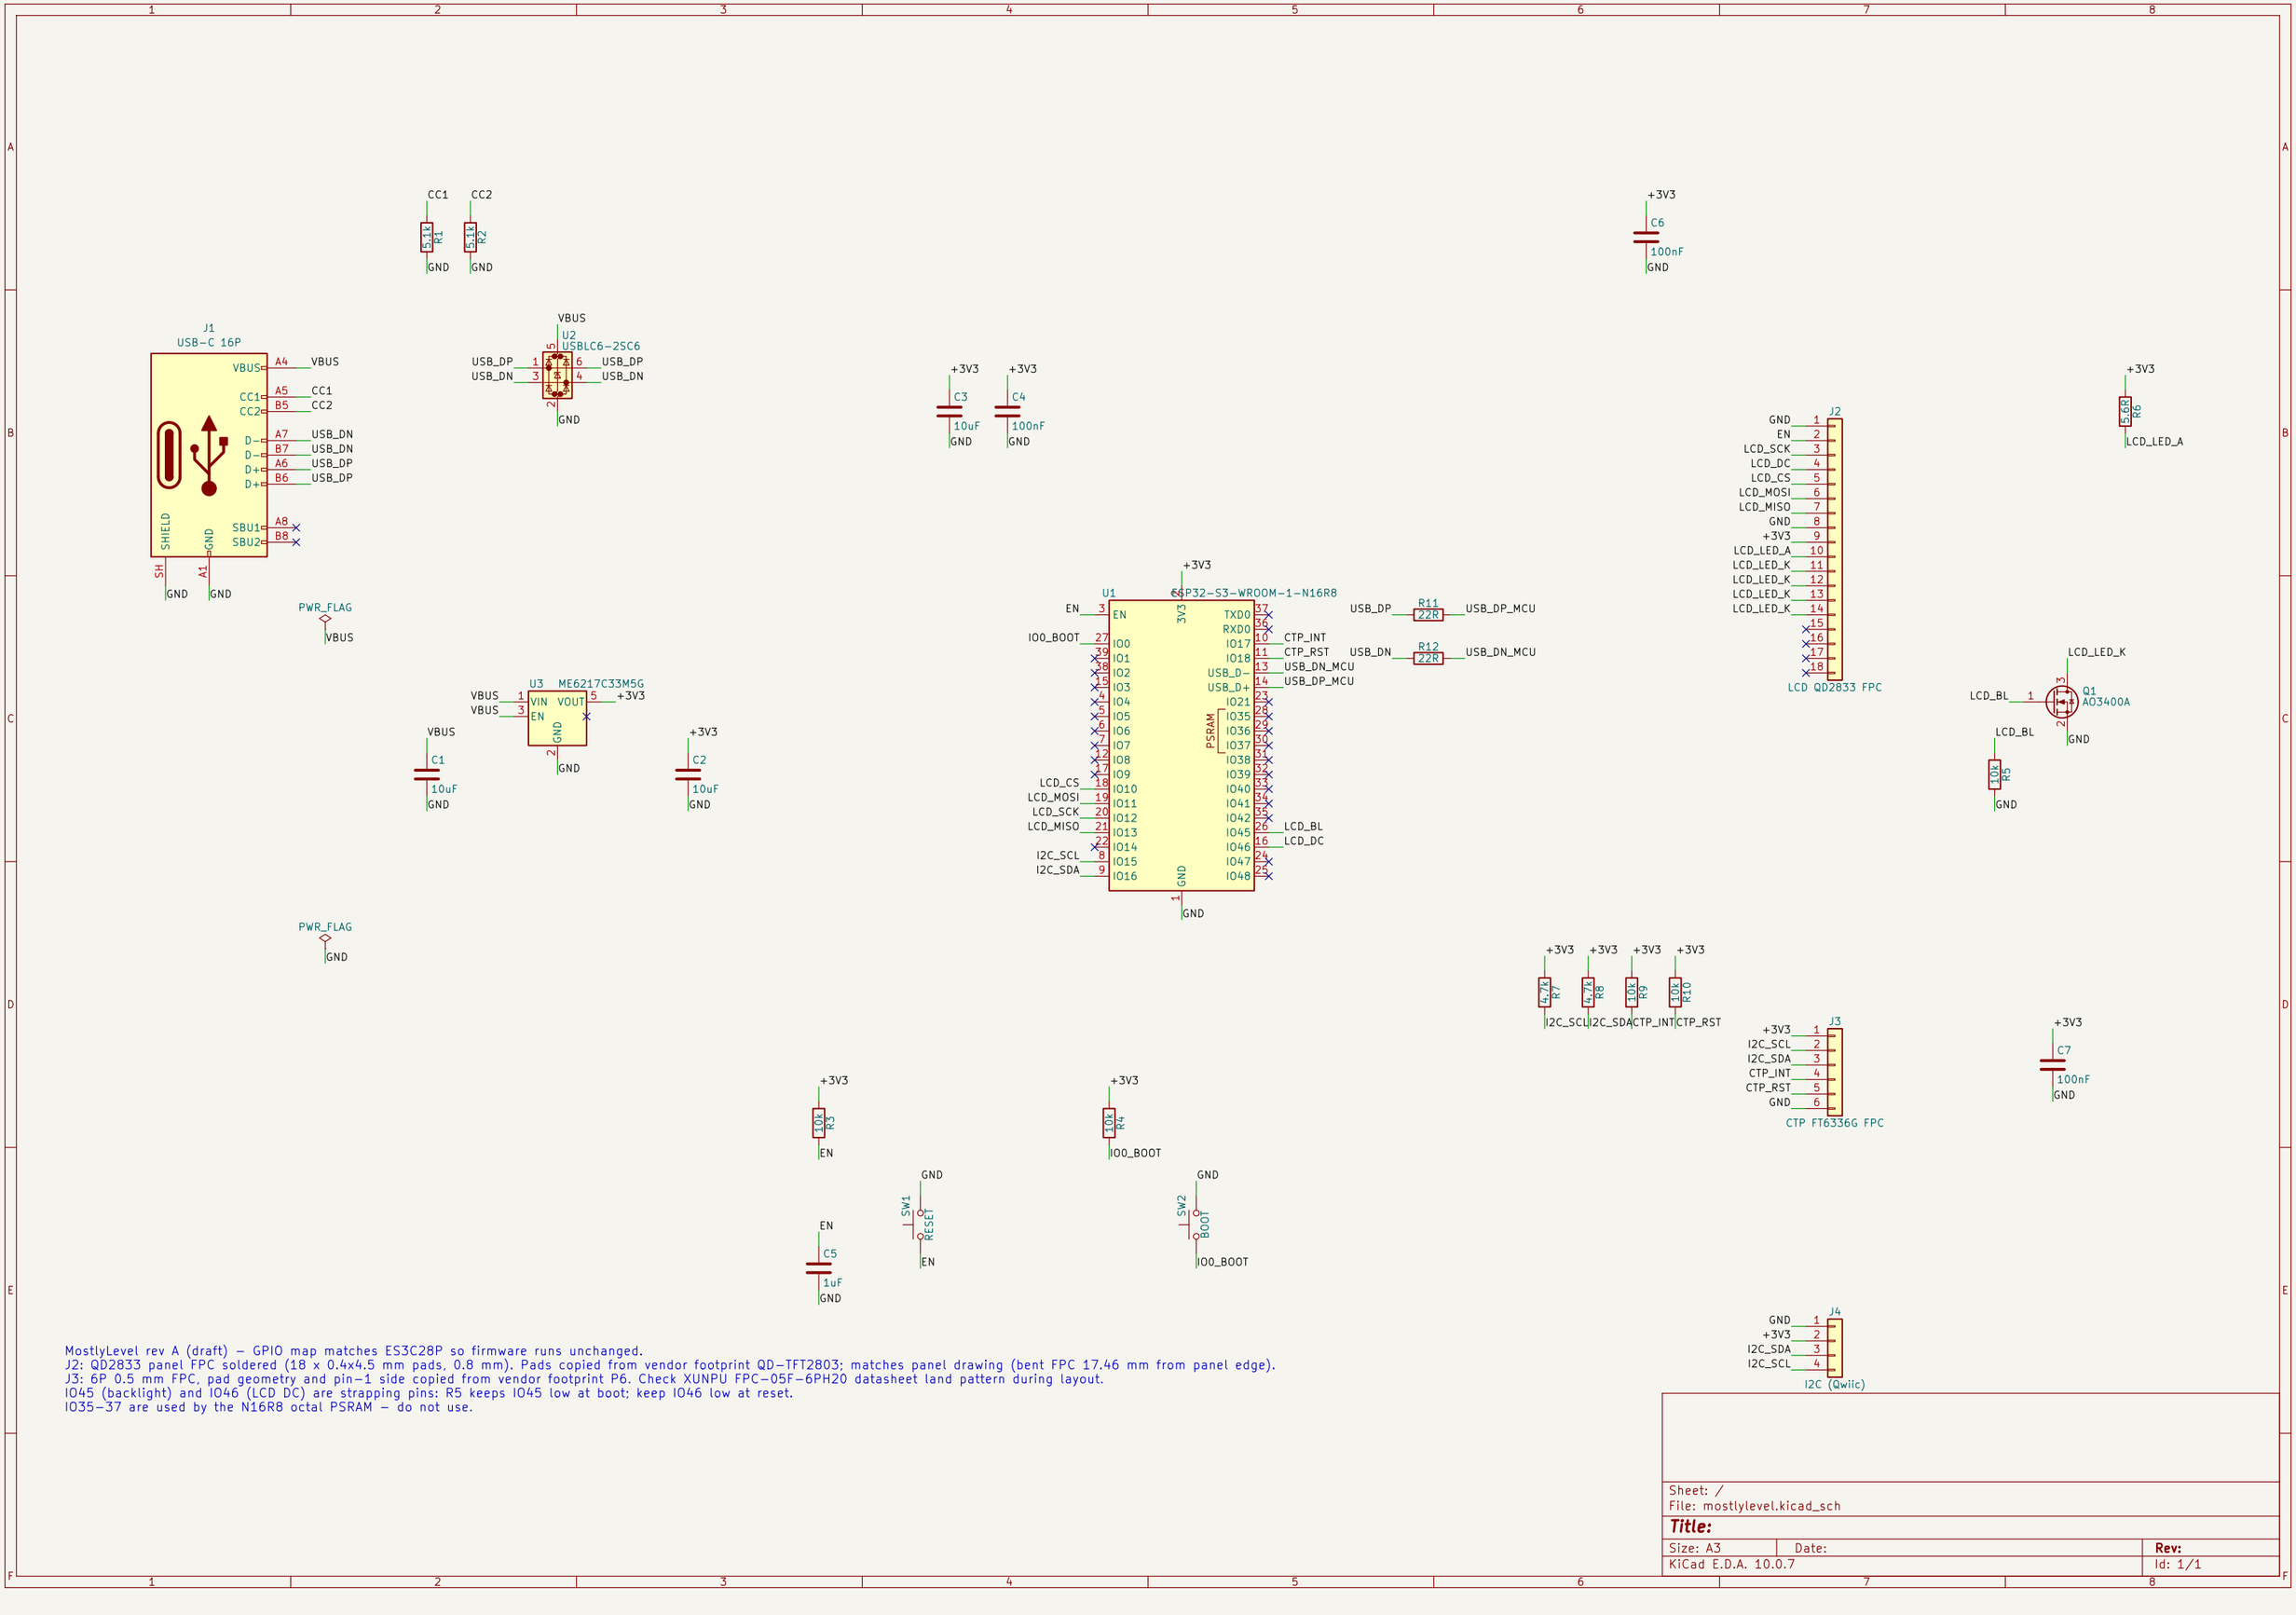


MostlyLevel rev A (draft) — GPIO map matches ES3C28P so firmware runs unchanged.
J2: QD2833 panel FPC soldered (18 x 0.4x4.5 mm pads, 0.8 mm). Pads copied from vendor footprint QD-TFT2803; matches panel drawing (bent FPC 17.46 mm from panel edge).
J3: 6P 0.5 mm FPC, pad geometry and pin-1 side copied from vendor footprint P6. Check XUNPU FPC-05F-6PH20 datasheet land pattern during layout.
IO45 (backlight) and IO46 (LCD DC) are strapping pins: R5 keeps IO45 low at boot; keep IO46 low at reset.
IO35-37 are used by the N16R8 octal PSRAM — do not use.

Sheet: /		
File: mostlylevel.kicad_sch		
Title:		
Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 1/1