FLAC3D Gitbook



Kyeong Sun Kim

Civil and Environmental Engineering

Seoul National University

 $Sept,\,2021$

Contents

1	KA.	IST Model	1
	1.1	Initial Configuration	1
	1.2	Zones	2
	1.3	Group	3
	1.4	Constitutive Model	3
	1.5	Soil-Structure Interface	6
	1.6	Boundary Conditions	7
	1.7	Initial Equilibrium	7
	1.8	Alterations	7
	1.9	Results	7
2	Axi	al Concrete Pile	8
	2.1	Problem Description	8
		2.1.1 Problem Statement	8
		2.1.2 Main Parameters	9
	2.2	Modeling Procedure	9
	2.3	Zones	0
	2.4	Groups	0
	2.5	Properties	1
	2.6	B.C. and I.C	2
	2.7	Initial Equilibrium	2
	2.8	Alterations	3
		2.8.1 install the pile	3
		2.8.2 vertical loading	3
		2.8.3 vertical then lateral loading	4

Contents

3	Pull	-Tests 15						
	3.1	Problem Description						
	3.2	Zones						
	3.3	Properties						
	3.4	Initial Equilibrium						
	3.5	Alterations						
	3.6	Some other notes						
4	Grid 19							
	4.1	Primitive Shapes						
	4.2	several primitive shapes connected:						
	4.3	Structural Element Operation						
	4.4	Densifying grid by specifying max size length						
		4.4.1 Densify a grid using geometric information						
5	Syn	tax and Grammar 27						
	5.1	Introduction						
	5.2	Zones						
	5.3	Properties						
	5.4	Gridpoints						
	5.5	Structural Elements						
	5.6	Extra Variables						
	5.7	Groups and B.C						
	5.8	Parameteric Studies						
	5.9	Setting FISH variables						
		5.9.1 Issuing Command						
	5.10	String						
	5.11	KAIST Model Code						
	5.12	Fish Syntax						
		5.12.1 Use of						
		5.12.2 Variable Types						
		5.12.3 Traditional for loop in FISH $\dots \dots \dots$						
		5.12.4 if else endif construct						
		5.12.5 Arrays and Maps						
		5.12.6 Fish Function						

Contents

Appendices

A	1. T	empla	te	44
	A.1	Proble	em Description	. 45
	A.2	Model	ling Procedure	. 45
	A.3	Zones	/Groups	. 45
	A.4	Proper	rties	. 45
	A.5	B.C. a	and I.C	. 45
	A.6	Initial	Equilibrium	. 45
	A.7	Altera	tions	. 45
	A.8	Result	ts	. 45
В	Refe	erence	Collective	46
		B.0.1	Uplift Resistance of Anchor Plate	. 46
		B.0.2	Numerical Analysis	. 47
		B.0.3	Standards	. 47
		B.0.4	Textbook	. 47
		B.0.5	Ph.D Thesis	. 47
		B.0.6	Award Lecture	. 47

There is grandeur in this view of life, with its several powers, having been originally breathed into a few forms or into one; and that, whilst this planet has gone cycling on according to the fixed law of gravity, from so simple a beginning endless forms most beautiful and most wonderful have been, and are being, evolved.

Charles Darwin(1809-1882)


1

KAIST Model


1.1 Initial Configuration


```
import itasca as it
import numpy as np
np.set_printoptions(threshold=20)
it.command("python-reset-state false")
from itasca import zonearray as za
from itasca import gridpointarray as gpa
```

1.2 Zones

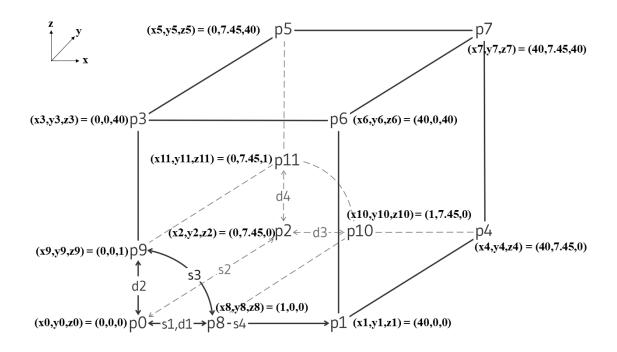

```
model new
zone create radial-cylinder point 0 (0,0,0) ...
                            point 1 (40,0,0) ...
                            point 2 (0,10,0) ...
                            point 3 (0,0,40) ...
                            point 4 (40,10,0) ...
                            point 5 (0,10,40) ...
                            point 6 (40,0,40) ...
                            point 7 (40,10,40) ...
                            point 8 (1,0,0) ...
                            point 9 (0,0,1) ...
                            point 10 (1,10,0) ...
                            point 11 (0,10,1) ...
                            size 10 20 26 40 ...
                            rat 1 1 1 1.5 ...
                            fill group "shaft"
```



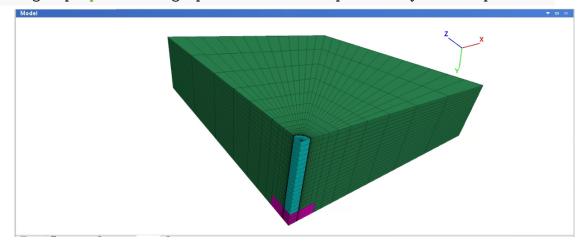

1.3 Group

zone group "plate" range position-x 0 3.2 position-y 8.5 10 position-z 0 3.2

1.4 Constitutive Model

Besides standard looping as depicted above, one can easily loop over sets of model objects (i.e., zones, gridpoints, structural element nodes, etc.) using the loop foreach construct. In this case, a container of objects must be given by a FISH intrinsic such as zone.list. A practical use of the loop foreach construct is to install a nonlinear initial distribution of elastic moduli in a FLAC3D grid. Suppose that the Young's modulus at a site is given by this equation:

$$E = E_0 + c\sqrt{z}$$

where z is the depth below surface, and c and E are constants. We write a FISH function to install appropriate values of bulk and shear modulus in the grid, as in this example:

Again, you can verify correct operation of the function by printing or plotting shear and bulk moduli.


In the function install, the loop takes place over all zones in the global list of zones. The FISH statement loop foreach is a variation of the loop statement that sets put to each zone in zone.list. Inside the loop, the z-coordinate of each zone centroid is used to calculate the Young's modulus, given in the equation above. We assume that the datum (or ground surface reference point) is at z=0. The variables zone.pos.z(pnt) and zone.prop(pnt, 'young') are zone intrinsics. (Recall that we talked about the gridpoint intrinsic gp.force.unbal earlier.) Here, we set properties directly from within a FISH function, rather than with a zone property command as in an earlier example.

```
#Constitutive model and properties for soil
zone cmodel assign strain-softening range group "Radial Cylinder1"
zone property density 2500 bulk 2e8 shear 1e8 range group "Radial Cylinder1"
zone property cohesion 2e6 friction 45 tension 2e5 dilation 10 range group "Radial
```

```
zone property table-friction 'fri' table-cohesion 'coh' table-dilation 'dil' range table 'fri' add (0, 45) (.05, 42) (.1, 40) (1, 40) table 'coh' add (0,2e6) (.05,1e6) (.1,5e5) (1,5e5) table 'dil' add (0, 10) (.05, 3) (.1, 0) #Constitutive modeland properties for shaft and plate zone cmodel assign elastic range group 'shaft' zone property bulk 13.9e9 shear 10.4e9 range group 'shaft' zone cmodel assign elastic range group 'plate' zone property bulk 13.9e9 shear 10.4e9 range group 'plate'
```

Table 1: Material Properties for a Concrete Pile Foundation in Clay

	Concrete Pile	Clay
Dry density	2500 kg/m^3	1230 kg/m ³
Wet density	-	1550 kg/m ³
Elastic Properties:		
Young's modulus	25.0 GPa	100.0 MPa
Poisson's ratio	0.20	0.30
Bulk modulus	13.9 GPa	83.33 MPa
Shear modulus	10.4 GPa	38.46 MPa
Strength Properties:		
Cohesion	-	30 kPa
Friction angle	-	0.0

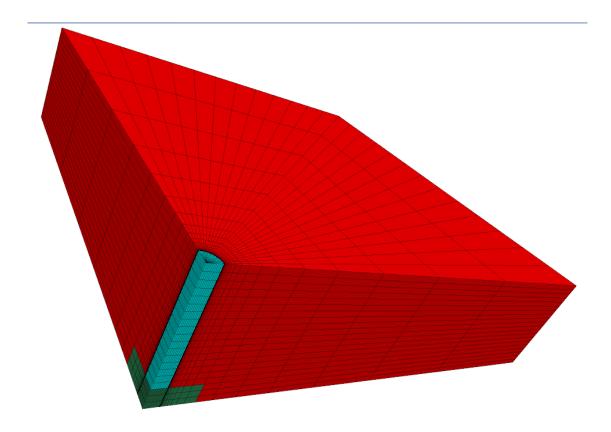

1.5 Soil-Structure Interface

```
# Name intersections of things named in the two extruder views
zone group 'clay' range group 'clay-c' or 'clay-s' or 'wetclay-s'
zone group 'pile' range group 'pile-c' group 'pile-s' or 'remove-s'
zone group 'remove' range group 'remove-s' group 'pile-c' not;
zone face group 'wall' internal range group 'wall-c' group 'pile'
zone face group 'base' internal range group 'base-s' group 'pile'
zone face skin; Name far field boundaries
# Delete the area marked for removal
zone delete range group 'remove'
;
# setup interfaces - separate using ZONE SEPARATE
# all at once so common nodes are separated
zone separate by-face new-side group 'iwall' slot 'int' ...
```

```
range group 'wall' or 'base'

# Want two different interfaces for proper normal direction at corner

zone interface 'side' create by-face range group 'wall' and 'iwall'

zone interface 'base' create by-face range group 'base' and 'iwall'

# Save initial geometric state

model save 'geometry'
```

- 1.6 Boundary Conditions
- 1.7 Initial Equilibrium
- 1.8 Alterations
- 1.9 Results

2

Axial Concrete Pile

2.1 Problem Description

2.1.1 Problem Statement

The pile is subjected to an axial load of 100 kN, and then the top of the pile is moved horizontally for a displacement of 4 cm. The goal is to determine relation of axial loading to the ultimate bearing capacity. And, lateral load-deflection curve is calculated.

- 1) origin at the top of the pile, z upward.
- 2) z=0: free surface
- 3) z=-8: fixed in z-eirection
- 4) x=+8, -8, y = 8: roller
- 5) skin friction is modeled by placing an interface between pile concrete wall and clay. In it, fric angle of 20 and c=30kPa are assumed.

6) toe interface is placed between pile tip and clay note: Zone faces are separated in a previous command so that the gridpoints common to both will be separated as well.

note: include Figure of grid (geometry)

2.1.2 Main Parameters

Diameter = 0.6 m

Length = 5

Clay

GWT = 5.5m

2.2 Modeling Procedure

- 1) equil. stress state under gravity load before install.
 - 1-1) water table is created at z=5.5
 - 1-2) wet density of clay is assigned below this water table.
- 2) equil. stress state after installation.
 - 2-1) change properties of pile zones from those representing clay to those representing concrete.
 - 2-2) vertical equil. stress distribution at this equil. state is shown in note: include Figure of contours of vertical stress at ini state incld. pile weight
- 3) apply vertical velocity at top of pile

 "ramp" = boundary condition is increased linearly

 note: critical timestep is controlled by high stiffness of concrete

 If velocity is sudden, inertial effects will dominate and renders difficulty to identification of steady state response of system

 table "ramp" is used to apply velocity to pile top gridpoints.

note: FISH FUNCTION vert_load calculates axial stress at the top of pile and stores value as a history

For efficiency, gridpoints on cap surface are stored in symbol "cap" as a map note: include plot of axial stress vs axial displ. at pile toe. ramp = (0.5e-8), $step \ number = 30000$

note: combined damping is used to remove kinetic energy for prescribed loading condition. This is because mass-adjustment process depends on velocity sign-changes..

note: FISH FUNCTION tot_reac monitors soil reaction along pile as a func of lateral displ. tot_reac creates tables of soil reaction (p) vs. lateral displ (y) at diff. locations along pile to generate p-y curve.

note: include Figure of p-y curve at 11 equidistant points along pile

2.3 Zones

```
model new

model title 'Axial and lateral loading of a concrete pile'

; create grid interactively from the extruder tool,

; exported to geometry.f3dat from State Record pane.

call 'geometry' suppress

zone generate from-extruder

; Reflect the grid to get a 1/2 space instead of a 1/4 space

zone reflect dip-direction 270 dip 90
```

2.4 Groups

```
; Name intersections of things named in the two extruder views zone group 'clay' range group 'clay-c' or 'clay-s' or 'wetclay-s'
```

```
zone group 'pile' range group 'pile-c' group 'pile-s' or 'remove-s'
zone group 'remove' range group 'remove-s' group 'pile-c' not ;
zone face group 'wall' internal range group 'wall-c' group 'pile'
zone face group 'base' internal range group 'base-s' group 'pile'
zone face skin; Name far field boundaries
; Delete the area marked for removal
zone delete range group 'remove'
; setup interfaces
; separate using zone separate
; all at once so common nodes are separated
zone separate by-face new-side group 'iwall' slot 'int' ...
    range group 'wall' or 'base'
; Want two different interfaces for proper normal direction at corner
zone interface 'side' create by-face range group 'wall' and 'iwall'
zone interface 'base' create by-face range group 'base' and 'iwall'
; Save initial geometric state
model save 'geometry'
```

2.5 Properties

```
; Initialize gravity, pore-pressures, density, and stres state
model gravity 10
; water table information
zone water density 1000
zone water plane origin (0,0,-5.5) normal (0,0,-1)
zone initialize density 1230
zone initialize density 1550 range group 'wetclay-s'; Wet density
; assign properties to the soil and interfaces - temporarily remove pile cap
```

```
zone cmodel assign mohr-coulomb ...
range group 'clay'

zone property bulk 8.333e7 shear 3.846e7 cohesion 30000 fric 0 ...
range group 'clay'

zone cmodel assign elastic range group 'pile'

zone property bulk 8.333e7 shear 3.846e7 range group 'pile'

zone cmodel assign null range group 'remove-s'

zone interface 'side' node property stiffness-normal 1e8 ...

stiffness-shear 1e8 friction 20 cohesion 30000

zone interface 'base' node property stiffness-normal 1e8 ...

stiffness-shear 1e8 friction 20 cohesion 30000
```

2.6 B.C. and I.C.

```
; boundary and initial stress conditions

zone face apply velocity-normal 0 range group 'Bottom'

zone face apply velocity-normal 0 range group 'East' or 'West'

zone face apply velocity-normal 0 range group 'North' or 'South'

zone initialize-stress ratio 0.4286

zone interface 'side' node initialize-stresses

zone interface 'base' node initialize-stresses
```

2.7 Initial Equilibrium

```
; Solve to initial equilibrium

zone ratio local

model solve ratio 1e-4

model save 'initial'
```

2.8 Alterations

2.8.1 install the pile

```
; install the pile

model restore 'initial'

zone cmodel assign elastic range group 'pile'

zone property bulk 13.9e9 shear 10.4e9 density 2500 range group 'pile'

model solve ratio 1e-4

model save 'install'
```

2.8.2 vertical loading

2.8.3 vertical then lateral loading

```
; vertical loading then lateral loading
model restore 'install'
zone initialize state 0
zone gridpoint initialize displacement (0,0,0)
zone gridpoint initialize velocity (0,0,0)
zone face apply stress-zz [-1.0e5/(math.pi*0.3*0.3)] range group 'Top'
model solve ratio 1e-4
model save 'lateral-load-start'
; apply lateral loading as x-velocity on cap
zone initialize state 0
zone gridpoint initialize displacement (0,0,0)
zone gridpoint initialize velocity
zone face apply velocity-x 1e-7 range group 'Top'
zone history name 'disp' displacement-x position 0,0,0
call 'p-y' suppress; Calculates p-y curve for pile, when tot reac is called
@make_pydata
               ; Generate p-y curve calculation data
@output_structure ; Sanity check of p-y curve data
fish history name 'load' @tot_reac
model step 416500
model save 'lateral-load'
```

3

Pull-Tests

3.1 Problem Description

note: FISH function force is used to sum the raction forces and monitor nodal displacement generated by the pull-test

 $note: free\ length\ of\ bolt\ that\ extends\ out\ of\ block\ +\ larger\ diameter$

Perfectly plastic behavior of grout = max cohesion is exceeded +post-peak weakening of shear bond strength

note: bond strength softening of the grout is defined with keyword coupling-cohesiontable (see Rockbolt Behavior)

The relation btw shear disp. and cohesion weakening is prescribed thru table cct. softening of friction of grout canbe defined using keyword couplingfriction-table.

3.2 Zones

3.3 Properties

```
struct pile property coupling-cohesion-table 'cct'
; change in cohesion with relative shear displacement
table 'cct' add (0,1.75e5) (0.025,1.75e4)
```

3.4 Initial Equilibrium

```
struct node fix velocity-x range position-z 0.7
struct node initialize velocity-x 1e-6 local range position-z 0.7
call 'pileforce' suppress; FISH function calculates reaction force on zones
```

3.5 Alterations

```
; Set up histories for monitoring model behavior
history interval 10
fish history name 'force' Offorce
struct node history name 'disp' displacement-z position (0.2,0.2,0.7)
; Achieve a total displacement of 4.0 cm
model cycle 40000
;
model save 'pull-5'
```

3.6 Some other notes

2.3. pull test with confinement "Pulltest06.f3dat" +modified pile logic.(see Behavior of Shear Coupling Springs) linear law is implemented.whereby reinforcement shear strength is defined as constant

 $(coupling-cohesion-shear)+\ effective\ pressure perimeter fric\ angle (coupling-friction-shear)$


This pressure dependence is activated automatically by issuing reinforcement


3. Pull-Tests

properties(perimeter) and


2.5. pull test with tensile rupture "Pulltest08.f3dat" note: tensile-yield, tensile-failure-strain: for limiting axial yield force and limiting axial strain for rockbolt

4.1 Primitive Shapes

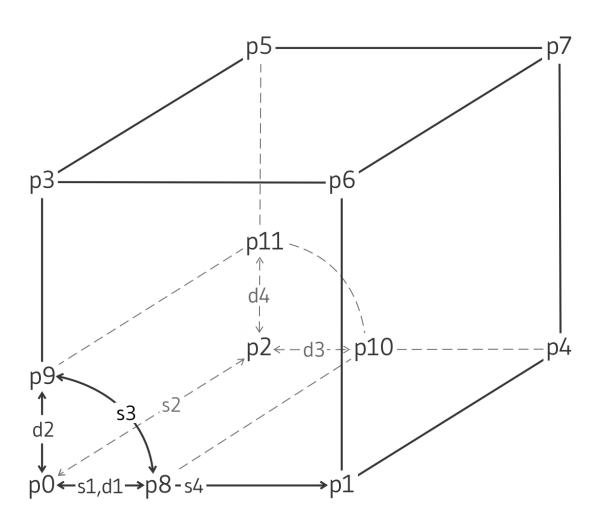

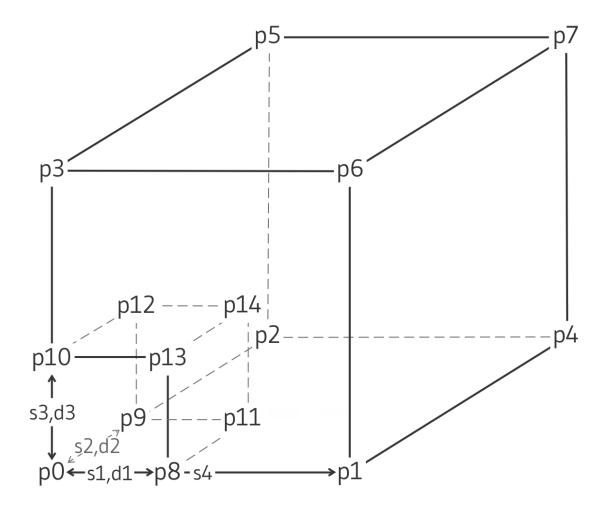

4. Grid

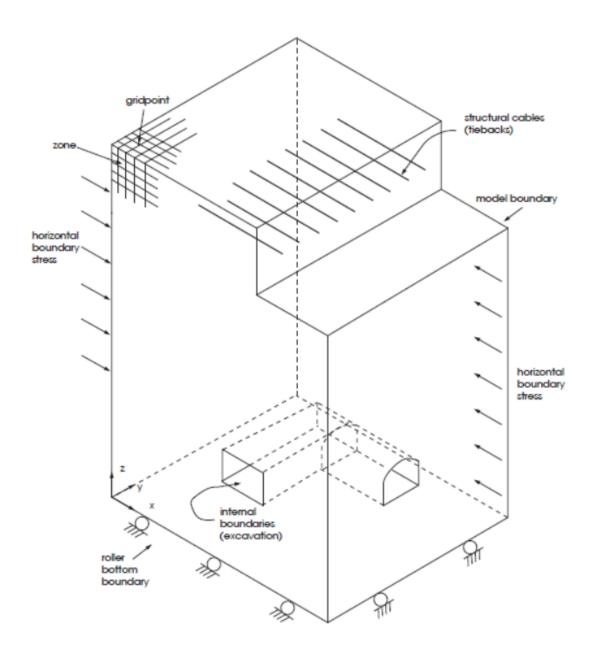

note: zone create generates primitive grid

note: zone gridpoint create puts gridpoints at specific locations
note: zone gridpoint merge ensures separate primitives are connected properly
note: zone attach connects primitive meshes of different zone sizes.

```
zone create radial-cylinder size 5 10 6 12 fill
zone create radial-cylinder size 5 10 6 12 ratio 1 1 1 5
each size is controlled by a ratio (geometric ratio of 1.2 times preceding zone)
```

4. Grid

```
ex) 5 along innder radius of cylindrical tunnel,
10 along axis
6 along circumference of tunnel
12 between periphery of tunnel and outer boundary of model
note: size keyword defines the number of zones in the grid.
```

keywords for zone create:

- dimension - edge - fill - point (boundary dimensions) - ratio (coarser toward edge) - size

4.2 several primitive shapes connected:

this adds symmetric part.

note: The symmetry plane is a vertical plane (located by the dip, dip-direction, and origin keywords) coincident with the x=0 plane. Note that dip angle (dip) and dip direction (dip-direction) assume that x corresponds to "East," y to "North", and z to "Up."

4. Grid

third option, the zone gridpoint create command, is available to position single points in the model region.

note: zone gridpoint create is used for positioning reference points of primitives

During execution of a zone create command, a check is made for each boundary gridpoint against the boundary gridpoints of zones that already exist.

If two boundary gridpoints fall within a tolerance of 1 ? 10-7 (relative to the magnitude of the gridpoints position vector) of each other, they are assumed to be the same point,

If it is discovered that some gridpoints don't match, the zone gridpoint merge command can be used to merge these gridpoints after the zone create command has been applied.

Example: (zone attach) - Two unequal sub-grids

Example: (zone densify)

```
zone create brick size 4 4 4
zone densify segments 2 range position-x 2 4
```

the first two command lines can be changed to where zone densify segments 2 refines the upper zones (between the z-coordinate of 2 and 4) with the segment number of 2 on each edge.

4.3 Structural Element Operation

Creating a liner in the service tunnel

```
; liner structure shell create by-face range cylinder ... end-1\ (0,0,-1)\ end-2\ (0,50,-1)\ \dots radius 3
```

The liner contains 240 structural shell elements and is connected to the FLAC3D grid at 143 structural-node links. The grid with the liner is shown below.

4.4 Densifying grid by specifying max size length

```
model new
zone create brick size 4 4 4
plot 'Brick' export bitmap filename 'densify3.png'
;
zone densify local maximum-length (0.5,0.5,0.4) range position-z 2 4
zone attach by-face
;
plot 'Brick' export bitmap filename 'densify4.png'
```

note that in the local z-direction, the maximum size length is 0.4. FLAC3D densifies the maximum length in this direction to be 1/3 (= 0.4)

The zone attach by-face command in this example is used to attach faces of sub-grids together rigidly to form a single grid

Always use the zone attach by-face command after the zone densify command if there are different numbers of gridpoints along faces of different zones.

4.4.1 Densify a grid using geometric information

5

Syntax and Grammar

5.1 Introduction

```
import itasca as it
it.command("python-reset-state false")
it.command("""
model new
zone create brick size 10 10 10
zone cmodel assign elastic
zone property density 2950 young 12e9 poisson 0.25
cycle 1
""")
it.zone.count()
z=it.zone.find(1)
print z
z.pos()
```

5. Syntax and Grammar

```
volume_sum = 0.0
for z in it.zone.list():
    volume_sum += z.vol()

print volume_sum
print z.vol() * it.zone.count()

assert volume_sum == z.vol() * it.zone.count()

z = it.zone.near ((5,5,5))
z.pos()
```

5.2 Zones

```
it.zone.count() # 1000

z = it.zone.find(1)

for z in it.zone.list():
    z = it.zone.near((5,5,5))

z.pos()
z.vol()
```

5.3 Properties

```
z.props() or z.props()['bulk']
z.prop('shear')
z.set_prop('bulk', 8.5e9)
```

5.4 Gridpoints

```
gp = it.gridpoint.near((2,2,2))
for gp in it.gridpoint.list():
   total_mass = gp.mass_gravity()
z.vol()*z.density()*1000
```

5.5 Structural Elements

```
it.structure.list()
it.structure.find(1)
it.structure.near((0,2,2))
it.structure.node.find(1)
s_node.links()[0]
```

5.6 Extra Variables

```
z.set_extra(1, 1.23)
z.set_extra(2, "a test string")
z.set_extra(1, gp.pos())
```

5.7 Groups and B.C.

```
if z.group("default") == "lower":
    gp.set_fix(0, True)
    gp.set_fix(1, True)
    gp.set_force_load((1e6,2e6,1e6))
it.zone.near((5,5,5)).stress()
```

```
it.zone.near((5,5,5)).strain()
"""
```

5.8 Parameteric Studies

```
"*note: for modulus in [6e9, 8e9, 10e9, 12e9]:"
it.command("""
model restore 'before_cycling'
zone prop young {}
model solve
""".format(modulus))
vertical_disp = it.gridpoint.near((5,5,10)).disp_z()
print "~~~".format(modulus,vertical_disp)
```

5.9 Setting FISH variables

```
import itasca as it
it.command('python-reset-state false')
it.fish.set('x', 10)
x = it.fish.get('x') yields 10
```

5.9.1 Issuing Command

```
import itasca as it
import numpy as np
data = np.loadtext('brick-data.txt')
command_template = ;;;
zone create brick
zone cmodel assign elastic
```

5. Syntax and Grammar

```
zone property density {density} young {young} poisson {poisson}
;;;
density = data[0]
young = data[1]
poisson = data[2]

command = command_template.format(density=density, young=young, poisson=poisson)
it.command(command)
```

5.10 String

```
"The value of x is {:.2f}".format(0.3872)

"The value of x is {:.2e}".format(0.3872)

"My name is Sasha"

"My name is {}".format("Sasha")

"My name is {name}".format(name="Sasha")
```

5.11 KAIST Model Code

5. Syntax and Grammar

```
it.command("""
model new
zone create radial-cylinder point 0 (0,0,0) ...
                         point 1 (40,0,0) ...
                         point 2 (0,10,0) ...
                         point 3 (0,0,40) ...
                         point 4 (40,10,0) ...
                         point 5 (0,10,40) ...
                         point 6 (40,0,40) ...
                         point 7 (40,10,40) ...
                         point 8 (1,0,0) ...
                         point 9 (0,0,1) ...
                         point 10 (1,10,0) ...
                         point 11 (0,10,1) ...
                         size 10 20 26 40 ...
                         rat 1 1 1 1.5 ...
                         fill group "shaft"
zone group "plate" range position-x 0 3.2 position-y 8.5 10 position-z 0 3.2
""")
" =======GROUPS AND MASKS======== "
" ----- "
" GROUPS AND MASK ARRAYS "
it.command("zone group \"lower\" range position-z 0 5")
za.in_group("lower")
za.in_group("lower").sum(), "zones in lower group."
corner_mask = reduce(np.logical_and, (x<3, y<3, z<3))
za.set_group(corner_mask, "corner", "geometry")
```

```
print za.in_group("corner", "geometry").sum(), "zones in corner group."
" GRIDPOINTS ARRAY FUNCTIONS "
gpos = gpa.pos()
gx, gy, gz = gpos.T
print gz
f = gpa.fixity()
print f
f[:,][gz==0] = True, True, True
print f
gpa.set_fixity(f)
top_gridpoints = gz==10
radial_distance = np.sqrt((gx-5)**2+(gy-5)**2)
central_gridpoints = radial_distance < 5</pre>
mask = np.logical_and(top_gridpoints, central_gridpoints)
print "boundary load applied to {} gridpoints".format(mask.sum())
fapp = gpa.force app()
print fapp
fapp[:,2] = mask*1e6*(5.0-radial_distance)/5.0
gpa.set force app(fapp)
print "zone centroids: "
print za.pos()
za.gridpoints()
za.faces()
za.ids()
print za.neighbors()
```

```
" ========PROPERTIES======== "
it.command("""
zone cmodel assign elastic
zone property density 2950 young 12e9 poisson 0.25
cycle 1
""")
" ======BOUNDARY CONDITIONS======== "
it.command("model solve")
print "gridpoint displacements:"
print gpa.disp()
print "gridpoint displacement magnitudes: "
mag = np.linalg.norm(gpa.disp(), axis=1)
print mag
```

```
max_index = np.argmax(mag)
print "Maximum displacement: {} at location {}".format(gpa.disp()[max_index],
                                        gpa.pos()[max_index])
print "Vertical displacement along the vertical line x=5, y=5: from z=0 to z=10"
print gpa.disp()[np.logical_and(gx==5, gy==5)][:,2]
za.stress()
za.stress_flat()
" ______ "
" =======REFERENCE EXAMPLES======= "
""" Some Numpy Operation Examples
np.array([1,2,3,4,5])
np.linspace(0,1,15)
np.zeros((4,4))
a = np.linspace(0,1,15)
b = np.ones_like(a)
np.sin(a)
print a[0]
a[0] = 20.2
print a
c = np.array(((1,2,3),(4,5,6),(7,8,9),(10,11,12)))
print c
c[0][0]
```

```
c[:,0]
"""

""" SOME GRIDPOINTS EXAMPLES

z = it.zone.near((5,5,5))
print "central zone id: {}, position: {}".format(z.id(), z.pos())

for gp in z.gridpoints():
    print "gridpoint with id: {} at {}".format(gp.id(), gp.pos())
"""
```

5.12 Fish Syntax

5.12.1 Use of ...

A complete FISH statement occupies one line. However, a line may be typed across two or more lines as long as each line but the ultimate is terminated with the continuation character (...). Use of temporary variables as hinge points to concatenate lengthy formulas can also be handy. The following example shows how this can be done:

```
fish define long_sum ; example of a sum of many things

local temp = v1 + v2 + v3 + v4 + v5 + v6 + v7 + v8 + v9 + v10

long_sum = temp + v11 + v12 + v13 + v14 + v15

end
```

5.12.2 Variable Types

```
model new

fish define types

v1 = 2

v2 = 3.4
```

```
v3 = 'Have a nice day'
v4 = v1 * v2
v5 = v3 + ', old chap'
v6 = vector(1,2,3)
v7 = matrix(vector(1,1,1))
v8 = true
end
@types
fish list
```

The resulting screen display looks like this:

```
Name
                   Value
(function) types 0 (integer)
           v1
                 2 (integer)
                 3.400000000000000e+00 (real)
           v2
                 'Have a nice day' (string)
           vЗ
                 6.800000000000000e+00 (real)
           v4
                 'Have a nice day, old chap' (string)
           v5
           v6
                 (1.00000000000000e+00,2.0000000000000e+00,
                  3.0000000000000000e+00) (vector3)
                                                                    **
                 3 x 1 (matrix)
           v7
                 true (boolean)
           8v
```

5.12.3 Traditional for loop in FISH

standard for loop is also available in FISH to provide for additionalloop control.

```
fish define xxx

sum = 0

prod = 1

loop for (n = 1, n <= 10, n = n + 1)</pre>
```

5.12.3.1 Controlled loop

```
model new
fish define xxx

sum = 0

prod = 1

loop n (1,10)

sum = sum + n

prod = prod * n

end_loop

io.out('The sum is ' + string(sum) + ...

' and the product is ' + string(prod))
end

@xxx
```

In this case, the loop variable n is given successive values from 1 to 10, and the statements inside the loop (between the loop and endloop statements) are executed for each value. As mentioned, variable names or an arithmetic expression could be substituted for the numbers 1 or 10. Note that the exit statement can be used to break out of a FISH loop and the continue statement can be used to skip the remaining instructions in the loop, moving to the next sequence of the loop.

It is important to note that this formulation of looping is different from a for loop in most high-level programming languages. For instance, one cannot easily control

the ending condition (i.e., loop from 1 to 10 excluding 10) or the incrementing mechanism (i.e., loop from 1 to 10 by twos or loop backward). A standard for loop is also available in FISH to provide for additional loop control.

5.12.4 if else endif construct

These statements allow conditional execution of FISH function segments; else and then are optional. The item test consists of one of the following symbols or symbol pairs:

The displayed value of abc in this example depends on the argument provided to abc when it is executed. You should experiment with different test symbols (e.g., replace > with <).

Until now, our FISH functions have been invoked from FLAC3D, either by using the square brackets [] of inline FISH, by giving the function name prepended with the the @ character, or by using the fish list command. It is also possible to do the reverse, to give FLAC3D commands from within FISH functions. Most valid FLAC3D commands can be embedded between the following FISH statements:

```
model new
fish define abc(xx)
    if xx > 0 then
        abc = 33
    else
        abc = 11
    end_if
end
[abc(1)]
[abc(-1)]
```

5.12.5 Arrays and Maps

It is often the case that one would like to store a list of objects that they will loop over in the future. These may be computed values from zones, for instance, or specific gridpoint pointers themselves. FISH has two containers to use in these circumstances, termed arrays and maps.

An array holds a list of FISH variables of any type that can be looped over or accessed by the integer index of the element of the array. Arrays can be multidimensional and do not resize dynamically. The simple example below shows how one can create an array of integers and then sum the values.

5.12.5.1 Array example

```
model new
fish define array_operation
    ;create and populate an array with products of 2
    arr = array.create(10)
    loop local n(1,10)
        arr[n] = 2*n
    end loop
    ; compute the sum and product of elements in the array
    sum = 0
    prod = 1
    local i = 1
    loop while (i <= array.size(arr,1))</pre>
        sum = sum + arr[i]
        prod = prod * arr[i]
        i = i + 1
    end_loop
    io.out('The sum is ' + string(sum) + ...
```

```
' and the product is ' + string(prod))
end
@array_operation
```

In this example, an array is created and filled with numbers. The loop while construct is used to loop over the array entries and the sum and product are computed and output.

A map, on the other hand, is an associative container, meaning that one can access the members of a map by an integer or string used to insert a value in the map. Maps can dynamically be resized and added to one another (appending maps together), and are the preferred constructs for storing lists of FISH variables for later access.

5.12.5.2 Map example

```
model new
fish define map_operation

;create and populate a map with products of 2

my_map = map(1,2)
loop local n(2,10)
    map.add(my_map,n,2*n)
end_loop

;compute the sum and product of elements in the map
sum = 0
prod = 1
loop foreach n my_map
    sum = sum + n
    prod = prod * n
end_loop
io.out('The sum is ' + string(sum) + ...
```

```
' and the product is ' + string(prod))
end
@map_operation
```

Unlike with arrays, maps can be looped through using the loop foreach construct. In this case, n is the value held in each map entry, not the integer name of the object in the map. Likewise, instead of using integers to insert objects into the map, one could use strings such as first, second, etc. This allows one to easily and efficiently store and access FISH variables by a user-defined name.

5.12.6 Fish Function

FISH functions to calculate bulk and shear moduli

```
model new
fish define derive(y_mod,p_ratio)
    s_mod = y_mod / (2.0 * (1.0 + p_ratio))
    b_mod = y_mod / (3.0 * (1.0 - 2.0 * p_ratio))
end
[derive(5e8,0.25)]
[b_mod]
[s_mod]
```

Appendices



1. Template

- A.1 Problem Description
- A.2 Modeling Procedure
- A.3 Zones/Groups
- A.4 Properties
- A.5 B.C. and I.C.
- A.6 Initial Equilibrium
- A.7 Alterations
- A.8 Results

B

Reference Collective

B.0.1 Uplift Resistance of Anchor Plate

B.0.1.1 Before 1968

- Coulomb
- Mohr
- Kotter's equation
- Balla (1961)
- Mors
- Matsuo

B.0.1.2 Post-1968

- Meyerhof, G.G., and Adams, J.I. 1968
- Meyerhof, G.G. 1973
- Das, B.M., and Seeley, G.R. 1975
- Rowe, R.K., and Davis, H. 1982
- Dickin, E.A., and Leung, C.F. 1983

B. Reference Collective

- Murray, E.J., and Geddes, J.D. 1987
- Dickin, E.A. 1988
- Merifield, R.S., and Sloan, S.W. 2006

B.0.2 Numerical Analysis

B.0.3 Standards

- IEEE 2001
- DS 1110, DS 1111

B.0.4 Textbook

• Das, B. M. 2013. Earth Anchors

B.0.5 Ph.D Thesis

B.0.6 Award Lecture