


Zinc Yellow-Chromate Plated Hex Head Screw

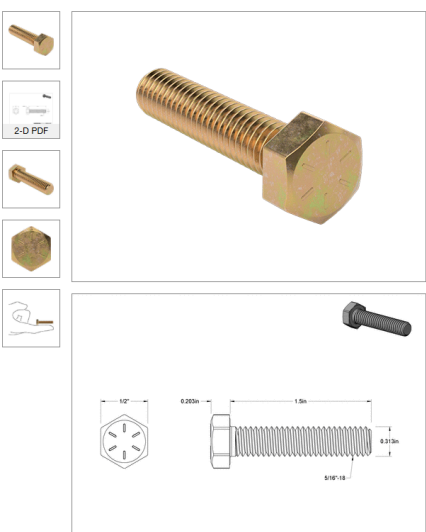

\$7.43 per pack of 10
Delivers Thursday
92620A587

☐ Packs of 10



[ADD TO ORDER](#)

[3-D Solidworks](#) [Download](#)
Learn more about our [Solidworks Add-In](#)


Head Type	Hex
Drive Style	External Hex
System of Measurement	Inch
Thread Direction	Right Hand
Thread Size	5/16"-18
Screw Size Decimal Equivalent	0.3125"
Thread Type	UNC
Thread Fit	Class 2A
Length	1 1/2"
Threading	Fully Threaded
Thread Spacing	Coarse
Head	
Width	1/2"
Height	13/64"
Fastener Strength Grade/Class	Grade 8
Material	Steel
Finish	Zinc Yellow-Chromate Plated
Tensile Strength	150,000 psi
Hardness	Rockwell C33
Specifications Met	ASME B18.2.1, SAE J429
RoHS	RoHS 3 (2015/863/EU) Compliant
REACH	REACH (EC 1907/2006) (06/27/2024, 241 SVHC) Compliant
DFARS	Specialty Metals Compliant (252 225-7009)
Country of Origin	Canada
USMCA Qualifying	No
Schedule B	731815.9000

[Home](#) | [Locations](#) | [Returns](#) | [Careers](#) | [Mobile App](#) | [Solidworks Add-In](#) | [Help](#) | [Settings](#)

By using this website, you agree to our [Terms and Con](#)



316 Stainless Steel Phillips Flat Head Screws

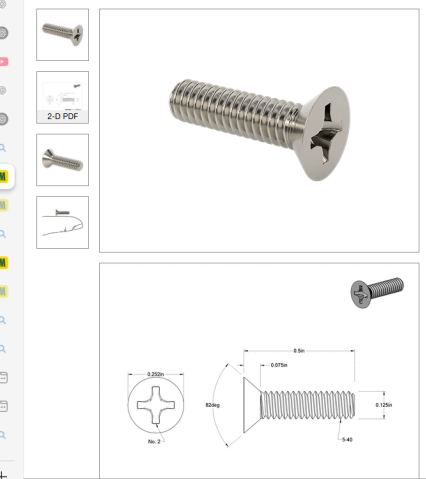

\$9.80 per pack of 100
Delivers tomorrow
91500A312

☐ Packs of 100

[ADD TO ORDER](#)

[3-D Solidworks](#) [Download](#)
Learn more about our [Solidworks Add-In](#)

Thread Size	5-40
Length	1/2"
Threading	Fully Threaded
Flat Head Profile	Standard
Head Diameter	0.252"
Head Height	0.075"
Countersink Angle	82°
Drive Style	Phillips
Drive Size	No. 2
Material	316 Stainless Steel
Finish	Passivated
Hardness	Rockwell B80
Tensile Strength	70,000 psi
Thread Type	UNC
Thread Spacing	Coarse
Thread Fit	Class 2A
Thread Direction	Right Hand
Head Type	Flat
System of Measurement	Inch
Specifications Met	ASME B18.6.3
RoHS	RoHS 3 (2015/863/EU) Compliant
REACH	REACH (EC 1907/2006) (11/07/2024, 242 SVHC) Compliant
DFARS	Not Specialty Metals Compliant
Country of Origin	Taiwan
Schedule B	731815.9000
ECN	EAR99

More corrosion resistant than 18-8 stainless steel screws, these screws have excellent resistance to chemicals and salt water. They're passivated for added protection against

[91500A311](#) | [91500A310](#)

[Home](#) | [Locations](#) | [Returns](#) | [Careers](#) | [Mobile App](#) | [Solidworks Add-In](#) | [Help](#) | [Settings](#)

[Terms and Conditions](#) | [Privacy Policy](#)



https://www.mcmaster.com/94895A030/

McMASTER-CARR.

High-Strength Steel Hex Nut
Grade 8, Zinc Yellow-Chromate Plated, 5/16"-18 Thread Size

94895A030
\$10.22 per pack of 100

Quantity 1 Pack of 100

Delivers Thursday

ADD TO ORDER

3-D Solidworks Download

Learn more about our Solidworks Add-In

Hex Nut Profile Standard
Fastener Strength Rating High
Material Zinc-Yellow-Chromate-Plated Steel
Thread Size 5/16"-18
Width 1/2"
Height 17/64"
Fastener Strength SAE Grade 8
Grade/Class
Drive Style External Hex
Nut Type Hex
Performance High Strength
System of Measurement Inch
Thread Direction Right Hand
Thread Fit Unified Standard Class 2B
Thread Spacing Coarse
Thread Type UNC
Country of Origin Canada
DFARS Compliance Not Specialty Metals Compliant
Export Control Classification EAR99
Number (ECCN)
REACH Compliance Not Compliant
RoHS Compliance Not Compliant
Schedule B Number 731816.0000
U.S.-Mexico-Canada Agreement (USMCA) No
Qualifying

The most commonly used hex nuts, these are suitable for fastening most machinery and

Home Locations Returns Careers Mobile App Solidworks Add-In Help Settings

By using this website, you agree to our Terms and Conditions and Privacy Policy

12°C Sunny

https://www.mcmaster.com/1603A7/

McMASTER-CARR.

Surface-Mount Hinge with Holes
Brass, Nonremovable Pin, 2" x 1/2" Door Leaf

\$4.54 Each
Delivers tomorrow
1603A7

Each

ADD TO ORDER

3-D Solidworks Download

Learn more about our Solidworks Add-In

Hinge Type Butt
Mount Type Screw-On
Mounting Holes With Holes
Mounting Style Surface
Opening/Closing Action Standard
Material Brass
Appearance Polished
Door Leaf
Height 2"
Width 1/2"
Frame Leaf
Height 2"
Width 1/2"
Overall Width 1"
Leaf Thickness 0.035"
Range of Motion 270°
Capacity Not Rated
Door Mounting Location Reversible
Pin Type Nonremovable
Pin Diameter 3/32"
Pin Material Brass
Mounting Fasteners Included No
Number of Mounting Holes 6
Mounting Hole Style Countersunk
Mounting Screw Size No. 5
RoHS RoHS 3 (2015/863/EU) Compliant
REACH REACH (EC 1907/2006) (01/21/2025, 247 SVHC) Compliant
DFARS Specialty Metals COTS-Exempt
Country of Origin United States
USMCA Qualification No.

No. 5 Screw Size

← 1603A23 | 1603A24 →

Terms and Conditions and Privacy Policy

12°C Sunny

Zinc Yellow-Chromate Plated Hex Head Screw
Grade 8 Steel, 5/16"-18 Thread Size, 2-1/2" Long, Fully Threaded



\$9.56 per pack of 10
Delivers tomorrow
92620A593

☐ Packs of 10

[ADD TO ORDER](#)

[Download](#)
Learn more about our [Solidworks Add-in](#)

Head Type	Hex
Drive Style	External Hex
System of Measurement	Inch
Thread Direction	Right Hand
Thread Size	5/16"-18
Screw Size Decimal Equivalent	0.3125"
Thread Type	UNC
Thread Fit	Class 2A
Length	2 1/2"
Threading	Fully Threaded
Thread Spacing	Coarse
Head Width	1/2"
Head Height	13/64"
Fastener Strength	Grade 8

[← 91257A592](#) | [91257A593 →](#)