


**Nim : L200170147**


## MODUL 5

- 
- The diagram illustrates a star network topology. At the center is a 24-port switch labeled "24-Port Switch". Radiating from this central switch are 23 black lines, each representing a network cable. Each cable terminates at a peripheral device, marked by a small green dot on the switch side. The peripheral devices include 22 PCs, labeled "PC-PT PC1" through "PC-PT PC25", with "PC-PT PC12" and "PC-PT PC13" missing from the sequence. Additionally, a "Server-PT Server1" is connected to the switch. All devices are represented by computer icons.


2. Pada server, pilih tab Config. Merubah konfigurasi server pada menu Interface pada bagian Fast-Ethernet. Isikan Server1 dengan IP Address 192.268.123.1 dan subnet Mask 255.255.255.0

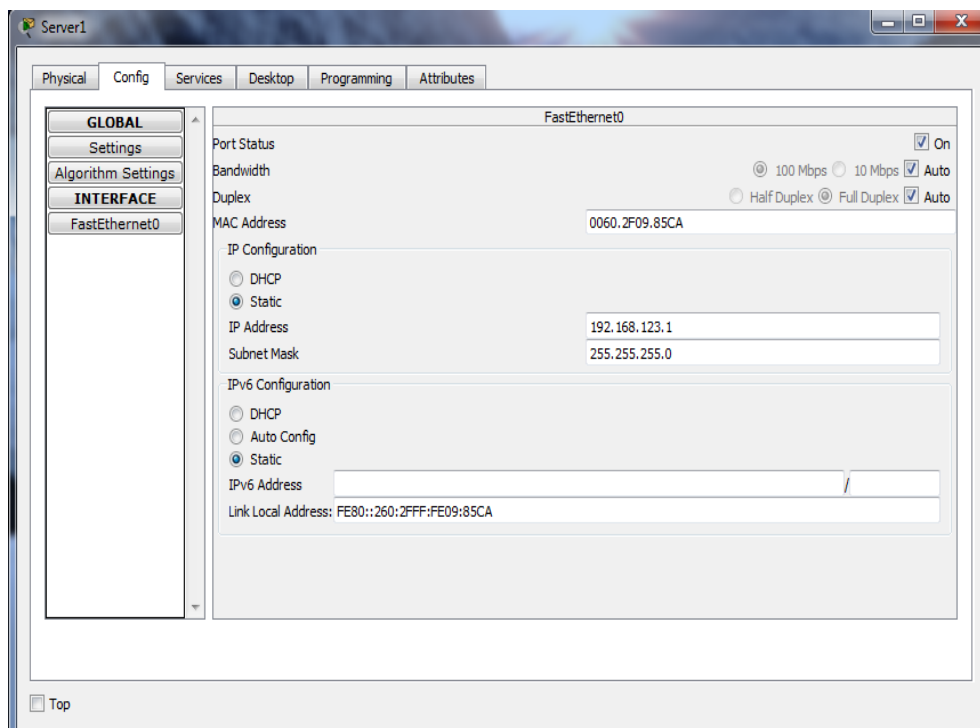

3. Buka seluruh Pc Client, pastikan DHCP dalam status on. Maka akan muncul ip address secara otomatis.

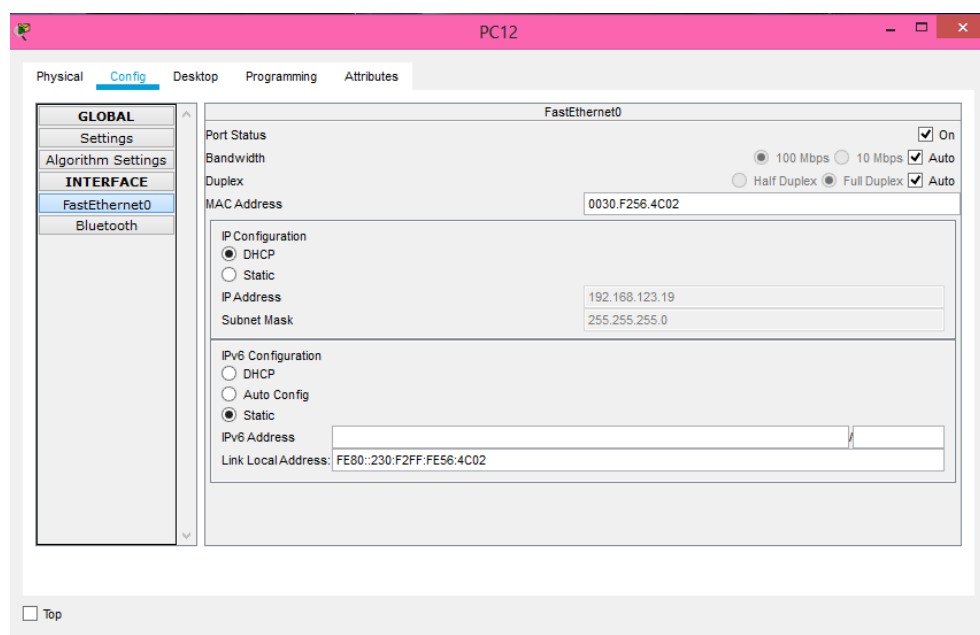

4. Meng-klik server dan buka tab service edit index html yang berada di kolom paling bawah. Membuat tulisan seperti yang ada di dalam screenshoot.

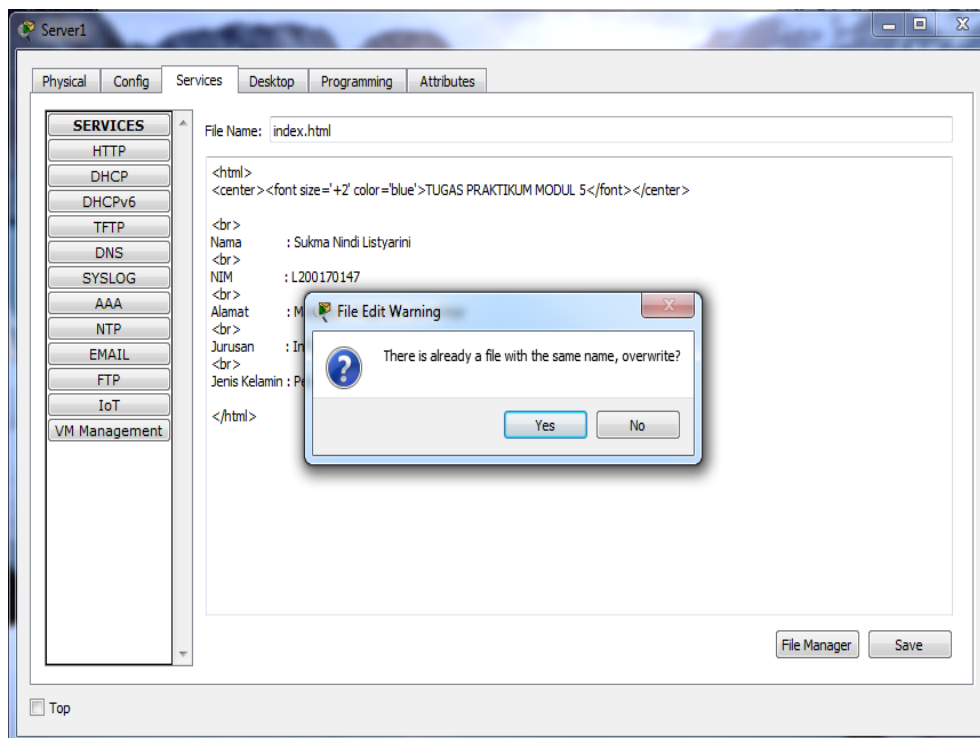

5. Melakukan browsing HTTP dengan alamat <http://192.168.123.19>

