


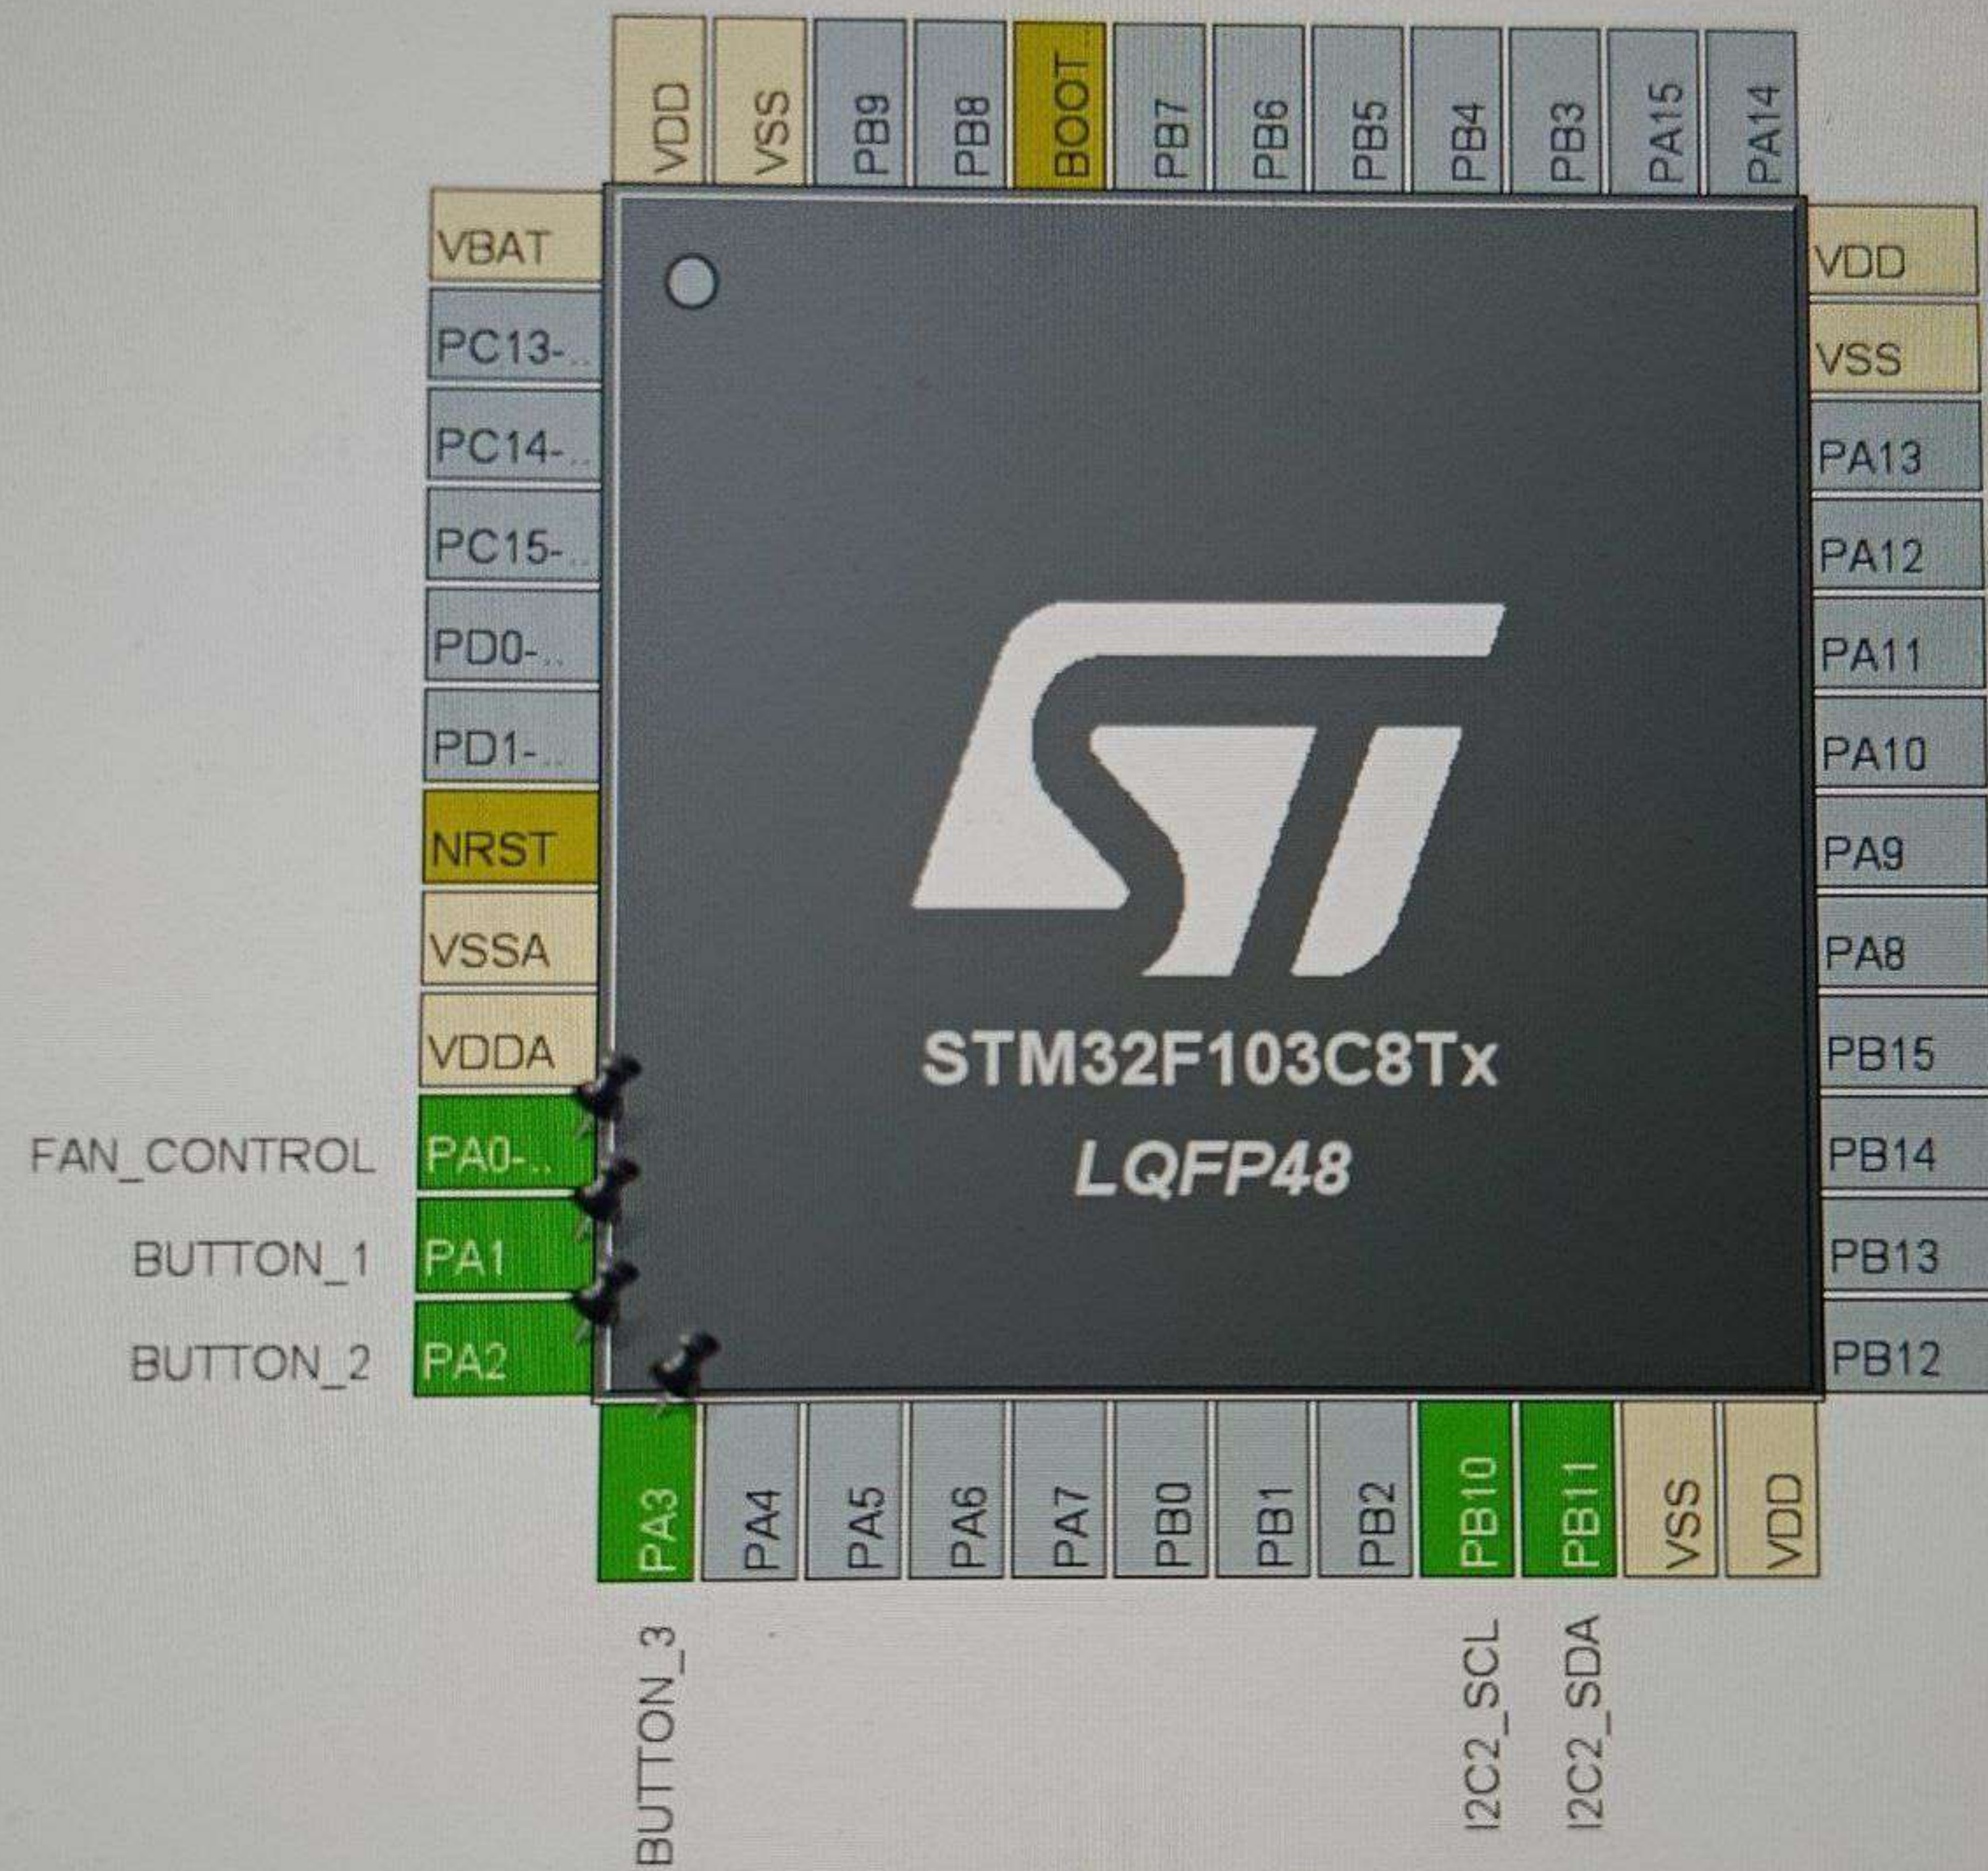

Timers

RTC

TIM1

TIM2

TIM3

TIM4

Connectivity

Computing

Middleware and Software Packs

☒ Internal Clock

Channel1 Disable

Channel2 Disable

Channel3 Disable

Channel4 Disable

Combined Channels Disable

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

☒ Parameter Settings

☒ User Constants

☒ NVIC Settings

☒ DMA Settings

NVIC Interrupt Table

Enabled

Preemption Priority

Sub Priority

TIM3 global interrupt



0

0

VBAT

PC13

PC14

PC15

PD0-O

PD1-O

NRST

VSSA

VDDA

FAN_CONTROL


PA0

BUTTON_1

PA1

BUTTON_2

PA2

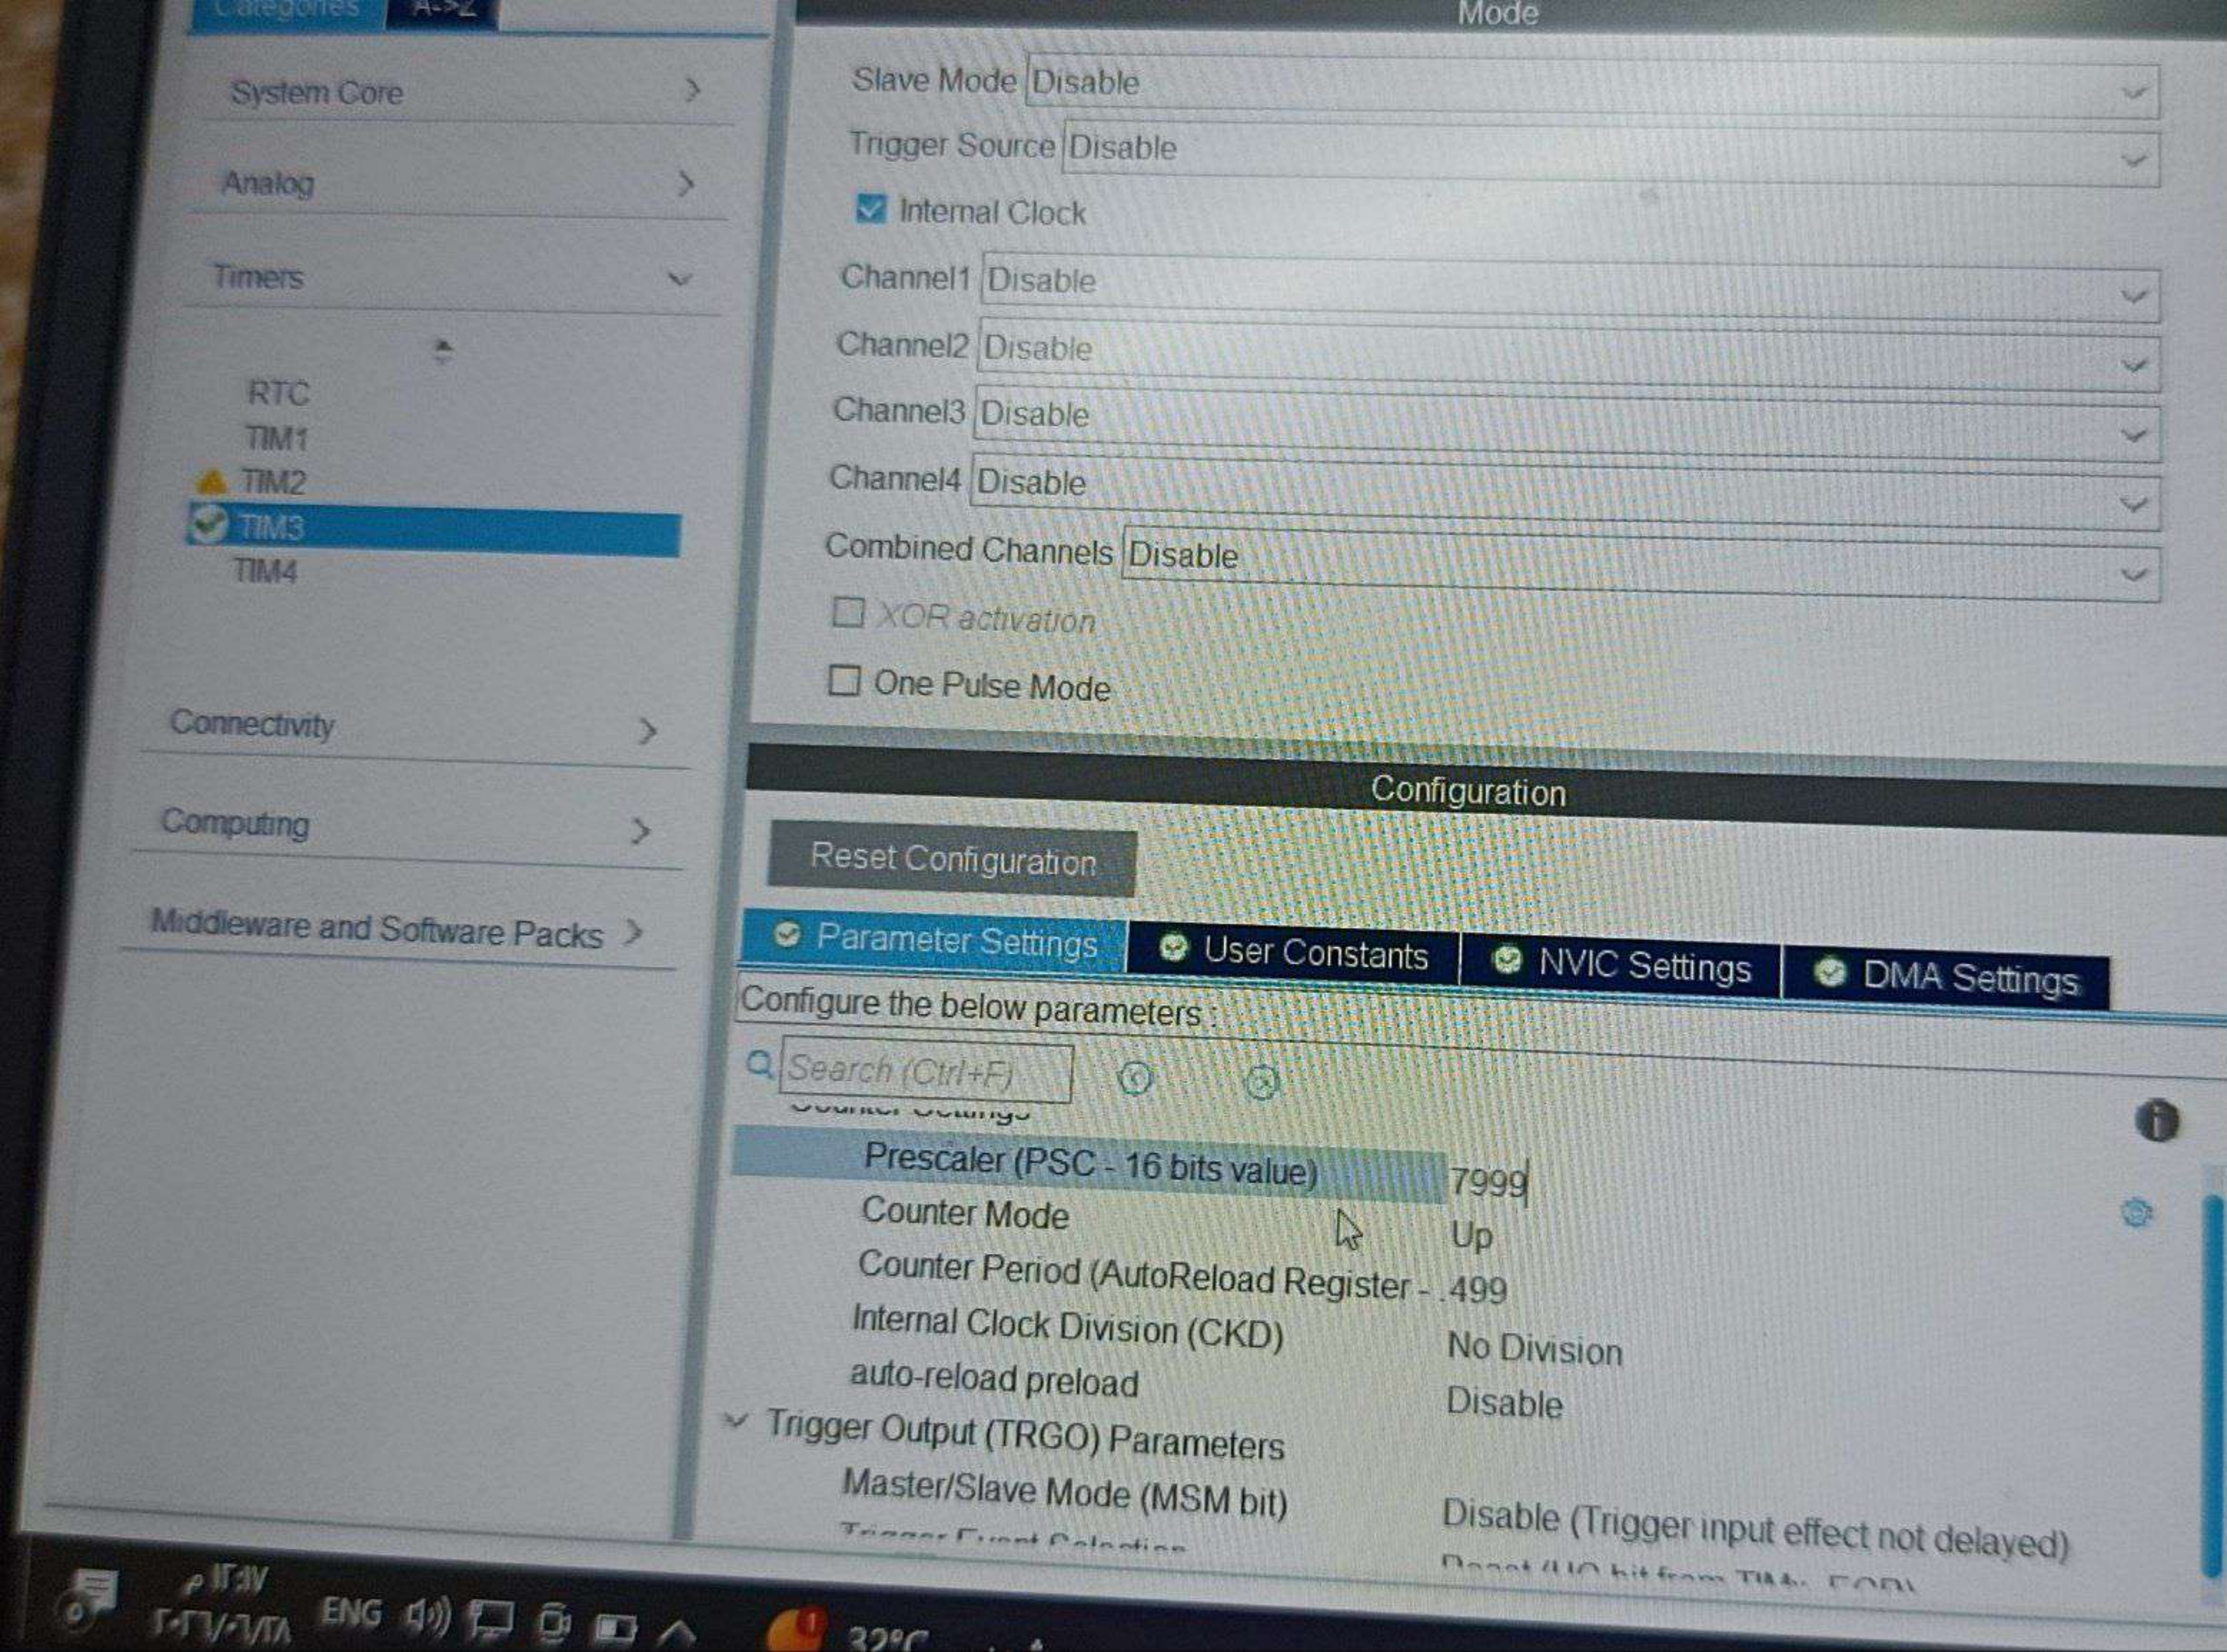

Connectivity

CAN

I2C1

☒ I2C2

SPI1

SPI2

USART1

☐ USART2

☐ USART3

USB

Computing

Middleware and Software Pa...

Configuration

Reset Configuration

☒ NVIC Settings

☒ DMA Settings

☒ GPIO Settings

☒ Parameter Settings

☒ User Constants

Search Signals

Search (Ctrl+F)

Pin Name	Signal on Pin	GPIO output I...	GPIO mode	GPIO Pull-up/...	Maximum out...	Us
PB10	I2C2_SCL	n/a	Alternate Fun...	n/a	High	
PB11	I2C2_SDA	n/a	Alternate Fun...	n/a	High	

Connectivity

CAN

I2C1

I2C2

SPI1

SPI2

USART1

USART2

USART3

USB

Computing

Middleware and Software Pa...

Configuration

Reset Configuration

NVIC Settings

DMA Settings

GPIO Settings

Parameter Settings

User Constants

Configure the below parameters :

Search (Ctrl+F)

I2C Speed Mode

Standard Mode

I2C Clock Speed (Hz)

100000

Slave Features

Clock No Stretch Mode

Disabled

Primary Address Length selection

7-bit

Dual Address Acknowledged

Disabled

Primary slave address

0



12:25

ENG



32°C مشمس



REDMI Note 14 Pro

EngLelasAlasad

12:25 2026/6/28