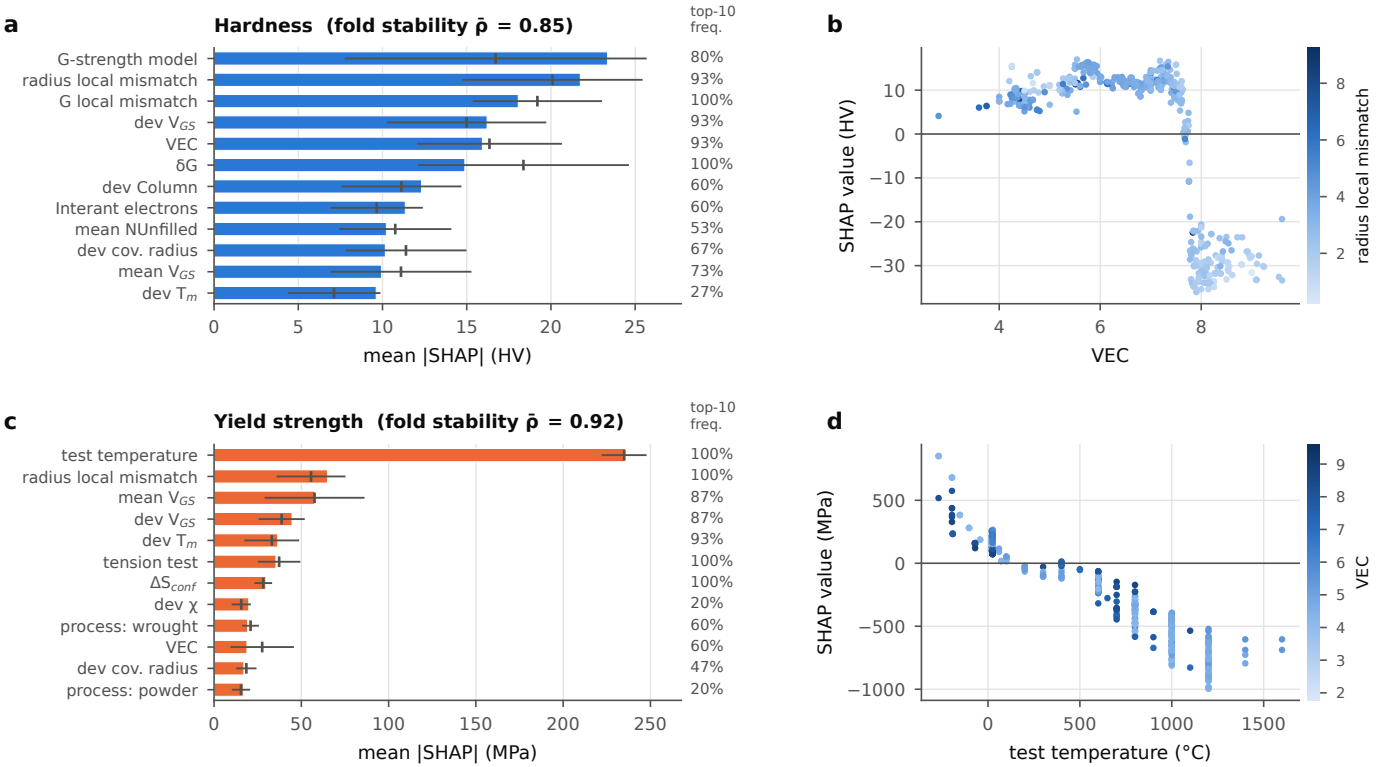

a
Hardness (fold stability $\bar{\rho}$ = 0.85)
top-10 freq.
G-strength model
radius local mismatch
G local mismatch
dev V_{GS}
VEC
δG
dev Column
Interant electrons
mean NUnfilled
dev cov. radius
mean V_{GS}
dev T_m
80%
93%
100%
93%
93%
100%
60%
60%
53%
67%
73%
27%
0
5
10
15
20
25
mean |SHAP| (HV)
b
SHAP value (HV)
10
0
−10
−20
−30
4
6
8
VEC
radius local mismatch
2
4
6
8
c
Yield strength (fold stability $\bar{\rho}$ = 0.92)
top-10 freq.
test temperature
radius local mismatch
mean V_{GS}
dev V_{GS}
dev T_m
tension test
ΔS_{conf}
dev χ
process: wrought
VEC
dev cov. radius
process: powder
100%
100%
87%
87%
93%
100%
100%
20%
60%
60%
47%
20%
0
50
100
150
200
250
mean |SHAP| (MPa)
d
SHAP value (MPa)
500
0
−500
−1000
0
500
1000
1500
test temperature (°C)
VEC
2
3
4
5
6
7
8
9