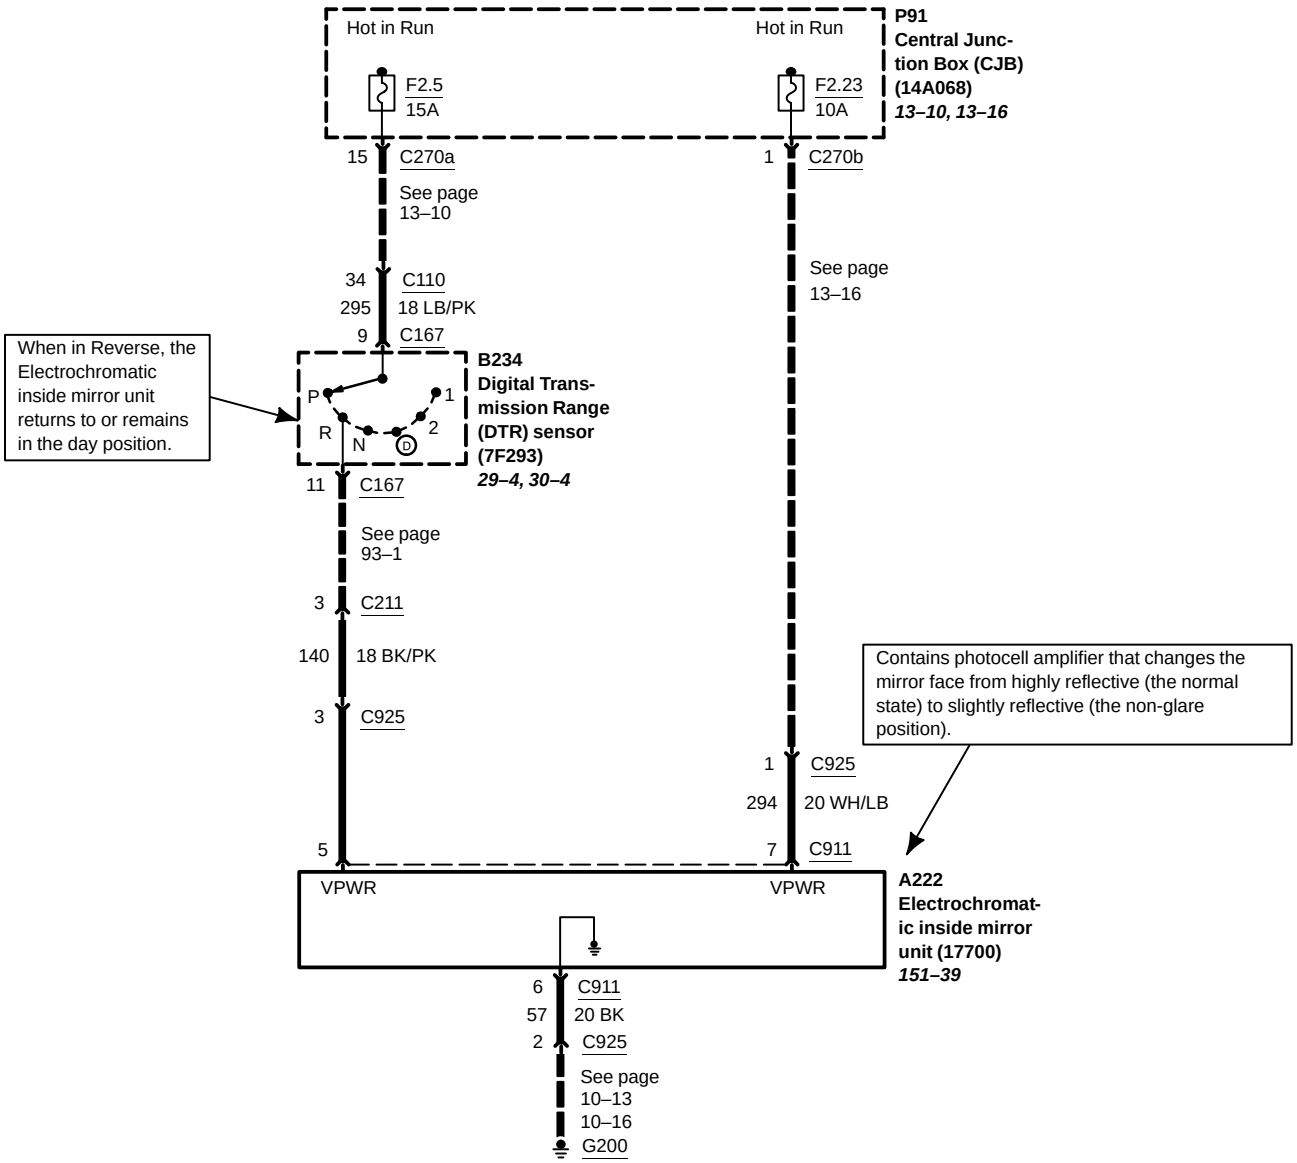
Hot in Run
Hot in Run
P91
Central Junction Box (CJB)
(14A068)
13–10, 13–16
F2.5
15A
F2.23
10A
15
C270a
1
C270b
See page
13–10
See page
13–16
34
C110
295
18 LB/PK
9
C167
When in Reverse, the Electrochromatic inside mirror unit returns to or remains in the day position.
P
R
N
D
1
2
B234
Digital Transmission Range (DTR) sensor
(7F293)
29–4, 30–4
11
C167
See page
93–1
3
C211
140
18 BK/PK
3
C925
Contains photocell amplifier that changes the mirror face from highly reflective (the normal state) to slightly reflective (the non-glare position).
1
C925
294
20 WH/LB
5
7
C911
VPWR
VPWR
A222
Electrochromatic inside mirror unit (17700)
151–39
6
C911
57
20 BK
2
C925
See page
10–13
10–16
G200