C289

14401

M256
Temperature blend
door actuator
(19E616)



F08059

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	437 (YE/LG)	Air temperature door variable resistor, wiper
4	436 (RD/LG)	Air temperature door variable resistor +
5	–	not used
6	438 (RD/WH)	Air temperature door variable resistor –
7	1003 (GY/YE)	Voltage in Run (overload protected)
8	57 (BK)	Ground

C290a

14401

A11
Radio (18806)

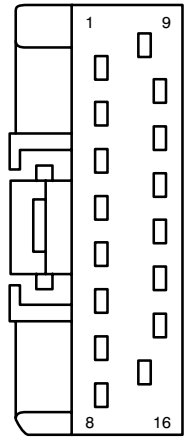

F16071

Pin	Circuit	Circuit function
1	235 (RD/BK)	Instrument illumination, input
	19 (LB/RD)	Radio (18806) Illumination, input
2	57 (BK)	Ground
3	1000 (RD/BK)	Voltage supplied in Start (overload protected)
4	–	not used
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	797 (LG/VT)	Voltage supplied at all times (overload protected)
10	137 (YE/BK)	Voltage in Run or Accessory (overload protected)
	1002 (BK/PK)	
11	694 (BK/LG)	Ground
12	800 (GY/LB)	Speaker, left rear (18808) +
13	801 (TN/YE)	Speaker, left rear (18808) –
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	Ground