C135 (BK)

14290

ABS control module
(2C219)

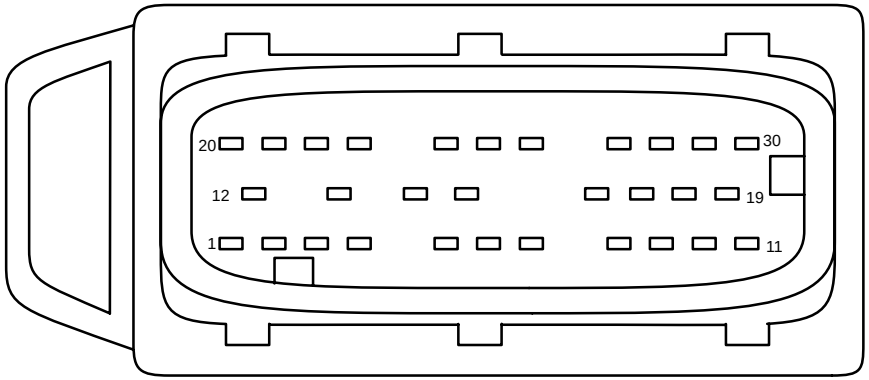

F30003

Pin	Circuit	Circuit function
1	523 (RD/PK)	Wheel speed sensor, right rear +
2	–	not used
3	524 (PK/BK)	Wheel speed sensor, right rear –
4	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
5	516 (YE/BK)	Wheel speed sensor, right front (2C204) –
6	569 (DG)	Hot with BPP switch engaged
7	–	not used
8	88 (BK/WH)	Voltage in Run (overload protected)
9	939 (VT)	traction assist, indicator, Lamp
10	–	not used
11	–	not used
12	57 (BK)	Ground
13	601 (LB/PK)	Voltage supplied at all times (overload protected)
14	483 (RD)	Voltage supplied at all times (overload protected)
15	57 (BK)	Ground

Pin	Circuit	Circuit function
16	977 (VT/WH)	Brake indicator, control
17	959 (GY)	Traction assist switch feed to ABS control module
18	960 (BK/LB)	Traction control indicator relay, control
19	–	not used
20	521 (TN/OG)	Wheel speed sensor, left front (2C205) +
21	522 (TN/BK)	Wheel speed sensor, left front (2C205) –
22	518 (LG/RD)	Wheel speed sensor, left rear +
23	519 (LG/BK)	Wheel speed sensor, left rear –
24	70 (LB/WH)	ISO Bus
25	603 (DG)	Anti–lock brake indicator, Lamp, control
26	–	not used
27	–	not used
28	–	not used
29	915 (PK/LB)	SCP Bus –
30	914 (TN/OG)	SCP Bus +