C134

14290

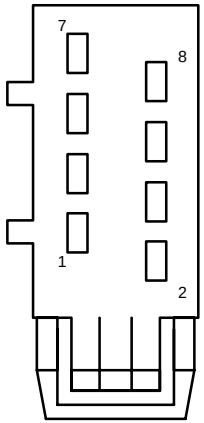

F08112

14A005



F08161

(1) 1575 (BK/WH)
(2) 1579 (OG/RD)
(3) 1578 (GY/BK)
(4) 1576 (TN/BK)
(5) 1577 (RD/LB)
(6) 1574 (DB)
(7) –
(8) –

C135

14290

A7
ABS control module
(2C219)

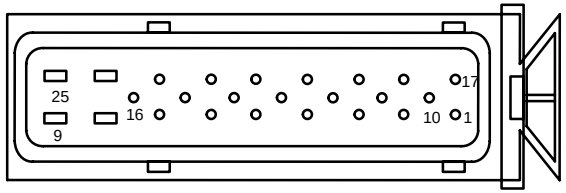

F25007

Pin	Circuit	Circuit function
1	522 (TN/BK)	Wheel speed sensor, left front (2C205) –
2	516 (YE/BK)	Wheel speed sensor, right front (2C204) –
3	519 (LG/BK)	Wheel speed sensor, left rear –
4	524 (PK/BK)	Wheel speed sensor, right rear –
5	535 (LB/RD)	to, Brake differential pressure switch
6	915 (PK/LB)	SCP Bus –
7	–	not used
8	1205 (BK)	Ground
9	601 (LB/PK)	Voltage supplied in Start and Run (overload protected)
10	521 (TN/OG)	Wheel speed sensor, left front (2C205) +
11	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
12	518 (LG/RD)	Wheel speed sensor, left rear +
13	523 (RD/PK)	Wheel speed sensor, right rear +
14	–	not used
15	914 (TN/OG)	SCP Bus +
16	–	not used
17	–	not used
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	–	not used
23	1040 (RD/BK)	Voltage in Run (overload protected)
24	1205 (BK)	Ground
25	534 (YE/LG)	Voltage supplied at all times (overload protected)