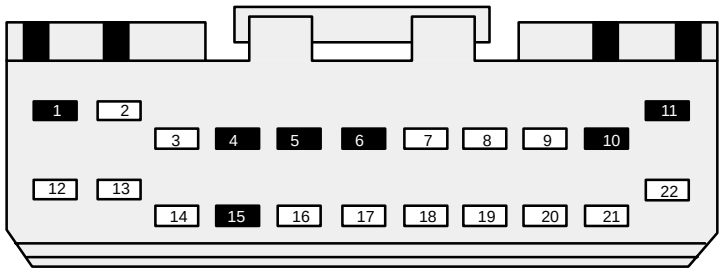

C241 (GRAY)

GENERIC ELECTRONIC MODULE (GEM)

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	145 (GY/BK)	4X2 Center Axle Solenoid Control
3	783 (GY)	4X4 Switch Input
4	–	NOT USED
5	–	NOT USED
6	–	NOT USED
7	605 (RD)	4X4 Center Axle Solenoid Control
8	780 (DB)	4X4 Mode Switch Input
9	210 (LB)	4X4 (High Range) Indicator Control
10	–	NOT USED
11	–	NOT USED
12	762 (YE/WH)	4WD Contact Plate Ground Output
13	810 (RD/LG)	Brake Pedal Position (BPP) Switch Input
14	976 (OG)	Transfer Case Electric Clutch Relay Output
15	–	NOT USED
16	782 (BN/WH)	4 Low to 4 High Relay Control
17	781 (OG/LB)	4 High to 4 Low Relay Control
18	763 (OG/WH)	Contact Plate D
19	764 (BN/WH)	Contact Plate C
20	770 (WH)	Contact Plate B
21	771 (VT/YE)	Contact Plate A
22	463 (RD/WH)	Neutral Sense Input

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C208	46-3
C228	14-3
C237	62-6
C245	13-19
C256	117-6
C257	117-7