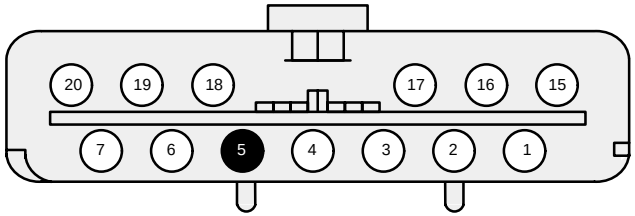

C280
ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	915 (PK/LB)	SPC (–)
2	729 (RD/WH)	Power (Hot at All Times)
3	57 (BK)	Ground
4	470 (PK/BK)	Sensor Input GND
5	–	NOT USED
6	243 (LG/OG)	Blend Door Actuator Feedback (+5)
7	767 (LB/OG)	Ambient Temperature Sensor Input
15	914 (TN/OG)	SPC (+)
16	296 (WH/VT)	Power (Hot in Run)
17	461 (OG)	Blower Relay
18	246 (VT)	Blend Door Actuator Feedback (Wiper)
19	434 (LB/PK)	Front Panel Illumination
20	468 (BN)	Sunload Sensor Input

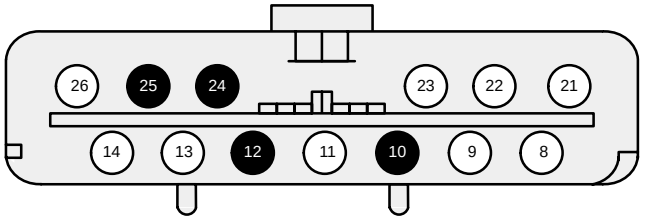

C281
ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
8	1070 (BN/LB)	Steering Wheel Switch Input
9	247 (WH/YE)	Blend Door Actuator Feedback (GND)
10	–	NOT USED
11	348 (VT)	A/C Pressure Cutoff Signal
12	–	NOT USED
13	250 (OG)	Blend Door Actuator Motor Drive (Heat)
14	19 (LB/RD)	Instrument Panel Lamp Feed
21	790 (WH/OG)	In-Car Temperature Sensor Input
22	575 (YE/BK)	Relay to Auxiliary Control
23	184 (TN/OG)	Blower Control Output (PWM)
24	–	NOT USED
25	–	NOT USED
26	249 (DB/LG)	Blend Door Actuator Motor Driver (Cool)