C175b

14290

Powertrain Control
Module (PCM)
(12A650)

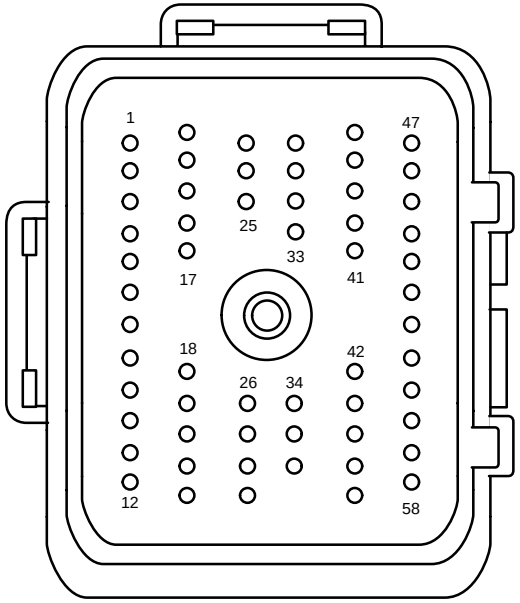

F58003

Pin	Circuit	Circuit function
1	8-PG29 (WH/RD)	Sensor signal
2	–	not used
3	4-RE8 (GY)	Data link, bus positive
4	5-RE8 (BU)	Data link, bus negative
5	9-RE8 (BN)	Sensor signal return (reference/ground)
6	–	not used
7	–	not used
8	–	not used
9	91S-FA79 (BN/BU)	Ground, switch
10	–	not used
11	–	not used
12	91S-RL25 (BN/RD)	Ground, switch
13	7-RE14 (YE/GN)	Voltage DC supplied at all times (sensor)

Pin	Circuit	Circuit function
14	8-TA67 (WH/VT)	Sensor signal
15	8-PG28 (WH)	Sensor signal
16	8-PG30 (WH/VT)	Sensor signal
17	9-PG30 (BN/WH)	Sensor signal return (reference/ground)
18	–	not used
19	–	not used
20	7-PG30 (YE/VT)	Voltage DC supplied at all times (sensor)
21	–	not used
22	8-TA68 (WH/BK)	Sensor signal
23	7-PG29 (YE/RD)	Voltage DC supplied at all times (sensor)
24	31-RE8 (BK/YE)	Ground

Pin	Circuit	Circuit function
25	31-RE21 (BK/RD)	Ground
26	31-RE26 (BK/RD)	Ground
27	31-RE25 (BK/RD)	Ground
28	29S-PG1 (OG/BU)	Voltage supplied at all times (overload protected), switch
29	–	not used
30	91S-RL3 (BK/OG)	Ground, switch
31	8-RJ22 (WH/BU)	Sensor signal
32	15S-RE8 (GN/YE)	Voltage, ignition switch in Start or Run (not overload protected), switch
33	15S-RE21 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected), switch
34	–	not used
35	–	not used
36	–	not used
37	–	not used
38	9-RJ22 (BN/BU)	Sensor signal return (reference/ground)
39	–	not used
40	29S-RE13 (OG)	Voltage supplied at all times (overload protected), switch
41	8-TA21 (WH/GN)	Sensor signal
42	8-FA88 (WH/VT)	Sensor signal

Pin	Circuit	Circuit function
43	91-RE27 (BN/YE)	Ground
44	29-RE8 (OG/YE)	Voltage supplied at all times (overload protected)
45	–	not used
46	–	not used
47	32-PA25 (WH/BU)	Switched between: Battery voltage, Ground or Open
48	8-JA56 (WH/BK)	Sensor signal
49	8-RE32 (WH/VT)	Sensor signal
50	–	not used
51	8-RJ40 (WH/GN)	Sensor signal
52	8-RJ13 (WH/VT)	Sensor signal
53	4-EC7 (GY/RD)	Data link, bus positive
54	5-EC7 (BU/RD)	Data link, bus negative
55	7-RE8 (YE)	Voltage DC supplied at all times (sensor)
56	31S-PG24 (BK/OG)	Ground, switch
57	7-PG24 (YE/BU)	Voltage DC supplied at all times (sensor)
58	–	not used