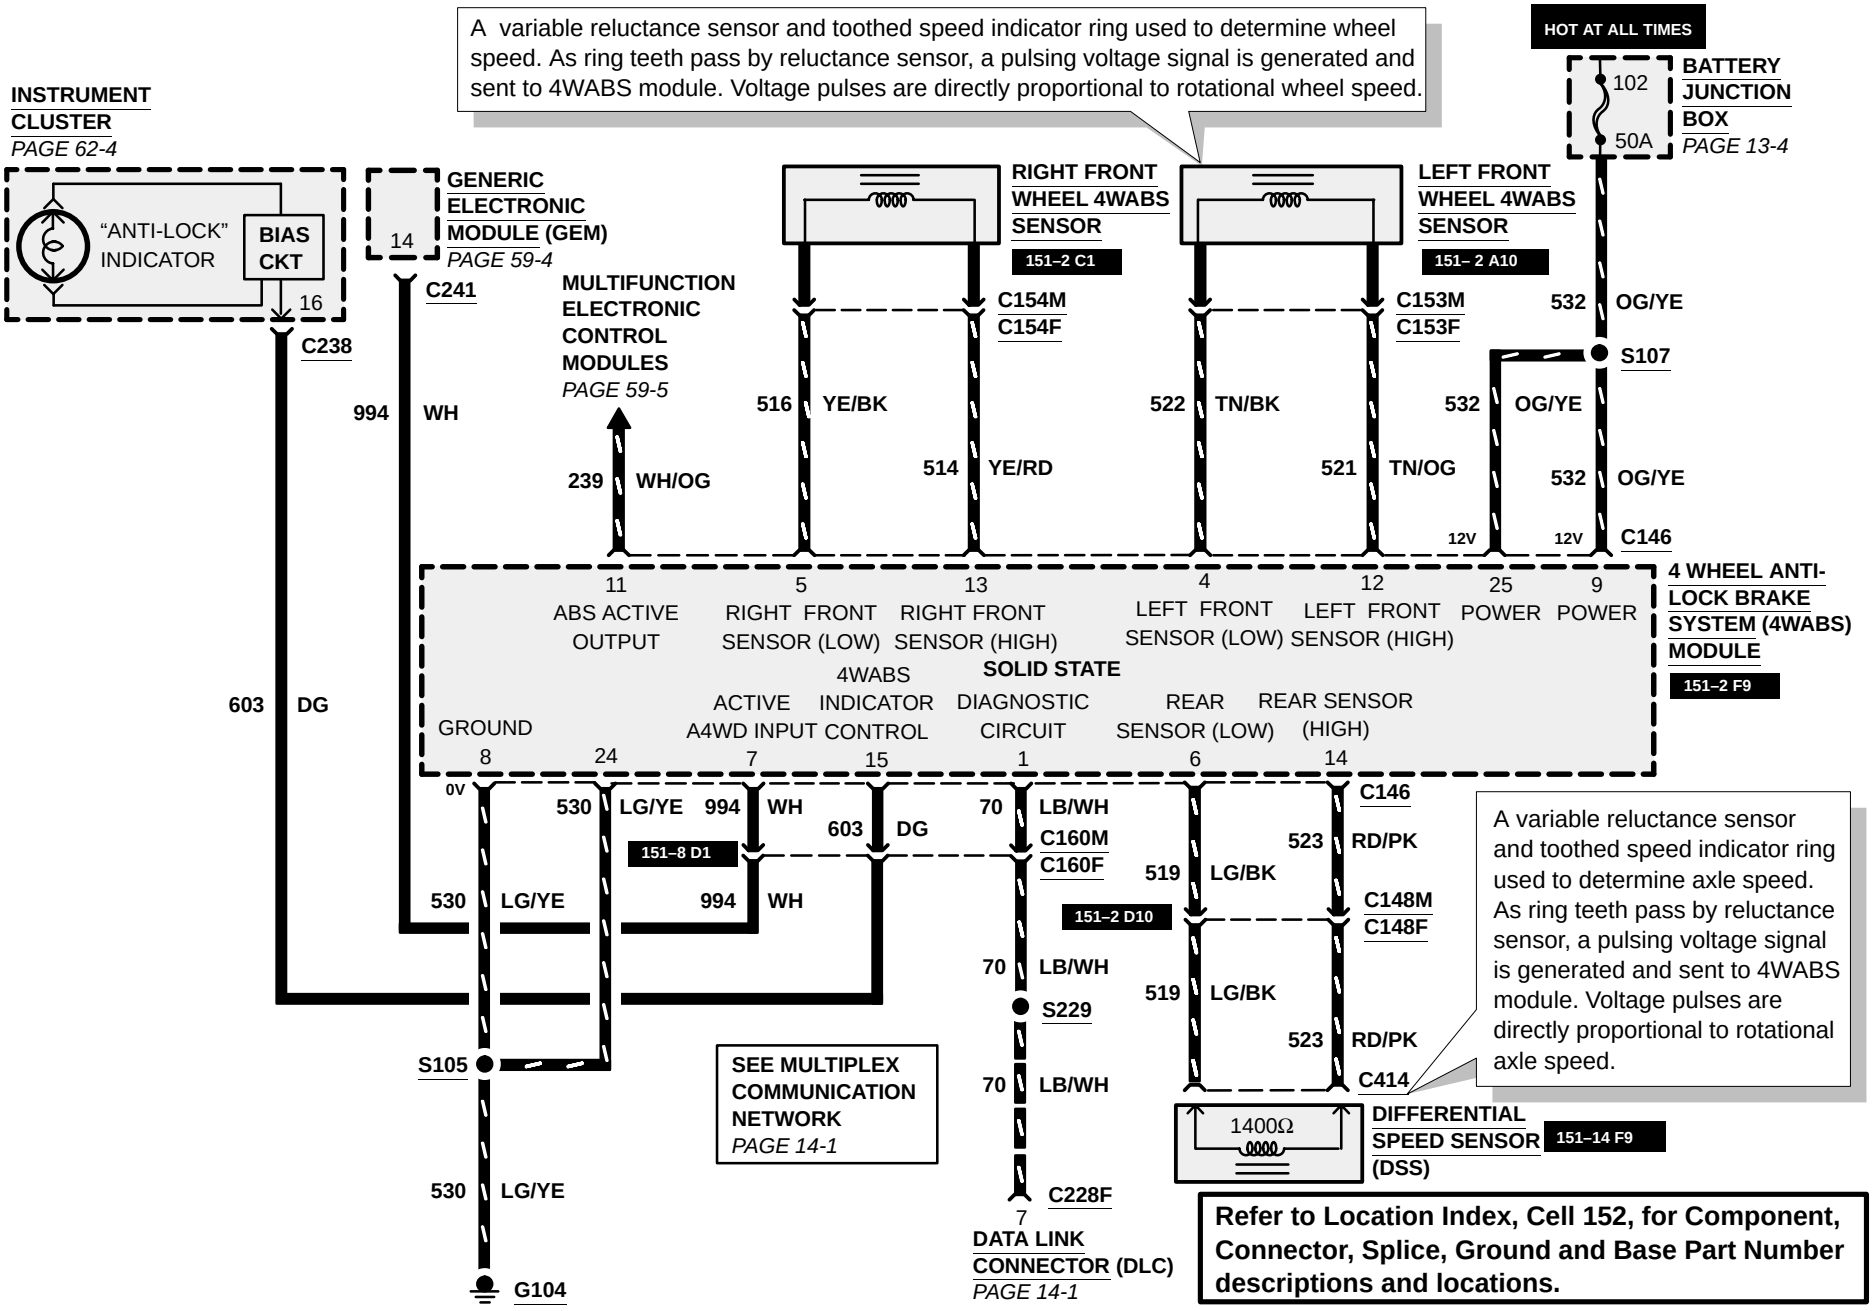
A variable reluctance sensor and toothed speed indicator ring used to determine wheel speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to 4WABS module. Voltage pulses are directly proportional to rotational wheel speed.
HOT AT ALL TIMES
BATTERY JUNCTION BOX
PAGE 13-4
102
50A
INSTRUMENT CLUSTER
PAGE 62-4
"ANTI-LOCK" INDICATOR
BIAS CKT
16
C238
14
GENERIC ELECTRONIC MODULE (GEM)
PAGE 59-4
C241
994 WH
MULTIFUNCTION ELECTRONIC CONTROL MODULES
PAGE 59-5
239 WH/OG
RIGHT FRONT WHEEL 4WABS SENSOR
151–2 C1
C154M
C154F
516 YE/BK
514 YE/RD
LEFT FRONT WHEEL 4WABS SENSOR
151– 2 A10
C153M
C153F
522 TN/BK
521 TN/OG
532 OG/YE
S107
532 OG/YE
532 OG/YE
12V
12V
C146
4 WHEEL ANTI-LOCK BRAKE SYSTEM (4WABS) MODULE
151–2 F9
11 ABS ACTIVE OUTPUT
5 RIGHT FRONT SENSOR (LOW)
13 RIGHT FRONT SENSOR (HIGH)
4 LEFT FRONT SENSOR (LOW)
12 LEFT FRONT SENSOR (HIGH)
25 POWER
9 POWER
SOLID STATE
603 DG
GROUND
8
24
A4WD INPUT
7
4WABS INDICATOR CONTROL
15
DIAGNOSTIC CIRCUIT
1
REAR SENSOR (LOW)
6
REAR SENSOR (HIGH)
14
0V
530 LG/YE
994 WH
151–8 D1
603 DG
70 LB/WH
C160M
C160F
151–2 D10
519 LG/BK
523 RD/PK
C146
C148M
C148F
530 LG/YE
994 WH
S105
SEE MULTIPLEX COMMUNICATION NETWORK
PAGE 14-1
70 LB/WH
S229
70 LB/WH
519 LG/BK
523 RD/PK
C414
A variable reluctance sensor and toothed speed indicator ring used to determine axle speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to 4WABS module. Voltage pulses are directly proportional to rotational axle speed.
1400Ω
DIFFERENTIAL SPEED SENSOR (DSS)
151–14 F9
530 LG/YE
C228F
7
DATA LINK CONNECTOR (DLC)
PAGE 14-1
G104
Refer to Location Index, Cell 152, for Component, Connector, Splice, Ground and Base Part Number descriptions and locations.