C128

12A690

Mass Air Flow (MAF) sensor (12B579)

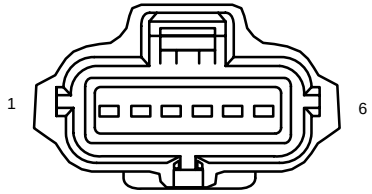

Pin	Circuit	Circuit function
1	359 (GY/RD)	signal, return
2	361 (RD)	Voltage supplied in Start and Run (overload protected)
3	570 (BK/WH)	Ground
4	968 (TN/LB)	Mass Air Flow (MAF) sensor (12B579), signal, return
5	967 (LB/RD)	Mass Air Flow (MAF) sensor (12B579), output
6	743 (GY)	Intake Air Temperature (IAT) sensor (12A697), input

C130

14A464

A/C clutch cycling pressure switch (19D594)



Pin	Circuit	Circuit function
1	348 (VT)	A/C demand signal
2	–	not used
3	–	not used
4	441 (RD/YE)	A/C pressure switch, to A/C cycling switch