C250

14401

N278
Ignition switch
(11572)

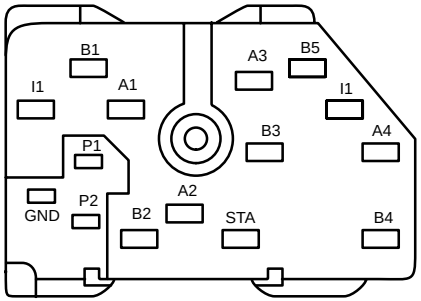

F15009

Pin	Circuit	Circuit function
B1	276 (BN)	Voltage supplied at all times (overload protected)
I2	–	not used
A1	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
B2	568 (LG)	Voltage supplied at all times (overload protected)
A2	687 (GY/YE)	Voltage in Run (overload protected)
B3	568 (LG)	Voltage supplied at all times (overload protected)
A3	687 (GY/YE)	Voltage in Run (overload protected)
B4	37 (YE)	Voltage supplied at all times (overload protected)
STA	33 (WH/PK)	Voltage supplied in Start (overload protected)
A4	489 (PK/BK)	Voltage, hot in run only
B5	276 (BN)	Voltage supplied at all times (overload protected)
I1	262 (BN/PK)	Voltage supplied in Start and Run (overload protected)
GND	57 (BK)	Ground
P1	–	not used
P2	409 (TN/BK)	Brake indicator

C251

14401

D20
Data Link Connector
(DLC) (14489)

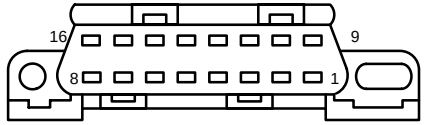

F16063

Pin	Circuit	Circuit function
1	–	not used
2	914 (TN/OG)	SCP Bus +
3	–	not used
4	57 (BK)	Ground
5	570 (BK/WH)	Ground
6	–	not used
7	70 (LB/WH)	ISO Bus
8	–	not used
9	–	not used
10	915 (PK/LB)	SCP Bus –
11	–	not used
12	–	not used
13	107 (VT)	Module programming signal
14	–	not used
15	–	not used
16	554 (YE/BK)	Voltage supplied at all times (overload protected)