4.6L 2V

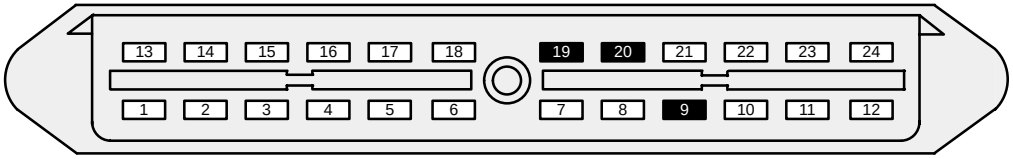

C192

CONSTANT CONTROL RELAY MODULE (CCRM)

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	229 (RD/OG)	Cooling Fan Motor (LOW) Output	13	20 (WH/LB)	Power (Hot in Start or Run)
2	229 (RD/OG)	Cooling Fan Motor (LOW) Output	14	228 (DB)	Low Fan Control Input
3	554 (YE/BK)	Power (Hot at All Times)	15	570 (BK/WH)	Ground
4	554 (YE/BK)	Power (Hot at All Times)	16	1205 (BK)	A/C Clutch Field Coil Ground
5	238 (DG/YE)	Power to Fuel Pump	17	639 (LG/VT)	High Speed Fan Ground
6	638 (OG/LB)	Cooling Fan Motor (HIGH) Output	18	1205 (BK)	Ground
7	638 (OG/LB)	Cooling Fan Motor (HIGH) Output	19	–	NOT USED
8	38 (BK/OG)	Power (Hot at All Times)	20	–	NOT USED
9	–	NOT USED	21	198 (DG/OG)	Keep Alive Power
10	38 (BK/OG)	Power (Hot at All Times)	22	331 (PK/YE)	A/C WOT Cutout Relay Input
11	1059 (LB/OG)	Power (Hot at All Times)	23	347 (BK/YE)	A/C Clutch Coil Control
12	361 (RD)	PCM Power	24	1118 (RD)	Power (Hot at All Times)

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C110	29-5
C132	29-5
C197	23-14, 24-14
C232	14-3
C251	60-3