C175t

7C078, A/T

Powertrain Control
Module (PCM)
(12A650)

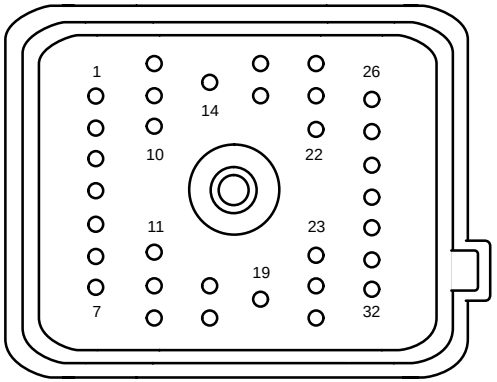

F32001

Pin	Circuit	Circuit function
1	91S-TA23 (BK/YE)	Shift solenoid, A
2	91S-TA24 (BK/BU)	Shift solenoid, B
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	91S-TA63 (BK/GN)	Pressure Control (PCA) solenoid A
8	91S-TA69 (BK/WH)	Shift solenoid, C
9	8-TA37 (WH)	Digital Transmission Range (DTR) sensor TR3
10	8-TA38 (WH/RD)	Digital Transmission Range (DTR) sensor TR4
11	–	not used
12	91S-TA65 (BK/WH)	Pressure Control (PCC) solenoid C
13	91S-TA64 (BK/RD)	Pressure Control (PCB) solenoid B
14	9-TA1 (BN/RD)	Signal return
15	91S-RJ25 (BK/OG)	Heated Oxygen Sensor (HO2S) #12 (9G444), heater
16	91S-RJ26 (BK/GN)	Heated Oxygen Sensor (HO2S) #22 (9G444), heater

Pin	Circuit	Circuit function
17	91S-TA70 (BK/RD)	Shift solenoid, D
18	8-TA39 (WH/BU)	Digital Transmission Range (DTR) sensor, TR2
19	–	not used
20	91S-TA47 (BK/WH)	Torque Converter Clutch (TCC) solenoid
21	8-TA74 (WH/BK)	Intermediate Shaft Speed (ISS) sensor (7H103), signal
22	8-TA40 (WH/GN)	Digital Transmission Range (DTR) sensor, TR1
23	8-TA26 (WH/RD)	Transmission Fluid Temperature (TFT) sensor
24	–	not used
25	–	not used
26	8-TA51 (WH/RD)	Output Shaft Speed (OSS) sensor (7H103), signal
27	8-TA27 (WH/VT)	Turbine shaft speed sensor (7H103), signal
28	8-RJ25 (WH/BU)	Heated Oxygen Sensor (HO2S) #12 (9G444), input
29	8-RJ26 (WH/GN)	Heated Oxygen Sensor (HO2S) #22 (9G444), input
30	–	not used
31	–	not used
32	–	not used