C150

14290

B15
Wheel speed sensor, left front (2C205)



F02078

Pin	Circuit	Circuit function
1	522 (TN/BK)	Wheel speed sensor, left front (2C205) –
2	521 (TN/OG)	Wheel speed sensor, left front (2C205) +

C151

13105

E40
Side lamp, left front (13411)



F03099

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	–	not used
3	380 (VT/YE)	Cornering lamp, Left,feed

C160

14290

B14
Wheel speed sensor, right front (2C204)



F02078

Pin	Circuit	Circuit function
1	516 (YE/BK)	Wheel speed sensor, right front (2C204) –
2	514 (YE/RD)	Wheel speed sensor, right front (2C204) +

C161

13105

E32
Side lamp, right front (13411)



F03099

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	–	not used
3	380 (VT/YE)	Cornering lamp, Right,feed

C167

7C078

B234
Digital Transmission Range (DTR) sensor (7F293)

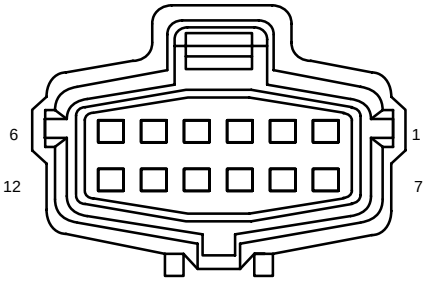

F12040

Pin	Circuit	Circuit function
1	–	not used
2	359 (GY/RD)	signal, return
3	199 (LB/YE)	Digital Transmission Range (DTR) sensor, TR3A
4	1144 (YE/BK)	Digital Transmission Range (DTR) sensor, TR1
5	1145 (LB/BK)	Digital Transmission Range (DTR) sensor, TR2
6	1143 (WH/BK)	Digital Transmission Range (DTR) sensor, TR4
7	–	not used
8	–	not used
9	295 (LB/PK)	Hot in Run
10	33 (WH/PK)	switched power, to starter solenoid
11	140 (BK/PK)	Voltage supplied in reverse
12	262 (BN/PK)	Voltage supplied in Start (overload protected)