C161

13N052

E32
Side lamp, right front (13411)



F02223

Pin	Circuit	Circuit Function
1	57 (BK)	Ground
2	379 (BN/WH)	Turn lamp, right front

C167 (BK)

12A581

B234
Digital Transmission Range (DTR) sensor (7F293)

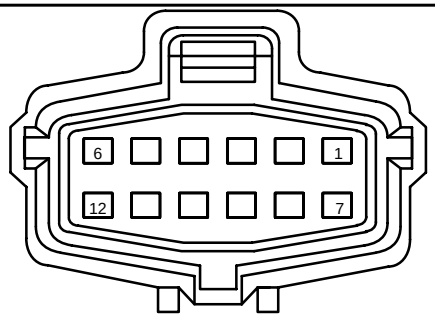

F12040

Pin	Circuit	Circuit Function
1	–	not used
2	359 (GY/RD)	signal, return
3	199 (LB/YE)	Digital Transmission Range (DTR) sensor, TR3A
4	1012 (OG/BK)	Digital Transmission Range (DTR) sensor (7F293), TR1
5	972 (BK/WH)	Digital Transmission Range (DTR) sensor (7F293), TR2
6	944 (DG/OG)	Digital Transmission Range (DTR) sensor (7F293), TR4
7	–	not used
8	–	not used
9	1040 (RD/BK)	Voltage in Run (overload protected)
10	1290 (WH/OG)	Voltage supplied in Start (overload protected)
11	140 (BK/PK)	Voltage supplied in reverse
12	1093 (TN/RD)	Power, Hot in Start with Park or Neutral

C171 (GN)

12A581

B48
Heated Oxygen Sensor (HO2S) #11 (9G444)



F04265

Pin	Circuit	Circuit Function
1	276 (BN)	Voltage supplied in Start and Run (overload protected)
2	387 (RD/WH)	Heated Oxygen Sensor (HO2S) #11 (9G444), heater
3	359 (GY/RD)	signal, return
4	74 (GY/LB)	Heated Oxygen Sensor (HO2S) #11 (9G444), input

C172 (GN)

12A581

B47
Heated Oxygen Sensor (HO2S) #21 (9G444)



F04265

Pin	Circuit	Circuit Function
1	276 (BN)	Voltage supplied in Start and Run (overload protected)
2	388 (YE/LB)	Heated Oxygen Sensor (HO2S) #21 (9G444), heater
3	359 (GY/RD)	signal, return
4	94 (RD/BK)	Heated Oxygen Sensor (HO2S) #21 (9G444), input