C135

12A581

A7
ABS control module
(2C219)

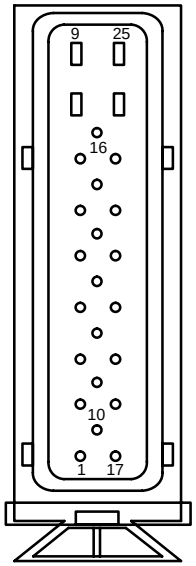

F25007

Pin	Circuit	Circuit function
1	70 (LB/WH)	ISO Bus
2	511 (LG)	Brake pedal position switch (13480), to stoplamps
3	–	not used
4	522 (TN/BK)	Wheel speed sensor, left front (2C205) –
5	516 (YE/BK)	Wheel speed sensor, right front (2C204) –
6	519 (LG/BK)	Wheel speed sensor, left rear –
7	–	not used
8	530 (LG/YE)	Chassis Ground
9	37 (YE)	Voltage supplied at all times (overload protected)
10	512 (TN/LG)	Brake indicator, control
11	–	not used
12	521 (TN/OG)	Wheel speed sensor, left front (2C205) +
13	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
14	523 (RD/PK)	Wheel speed sensor, right rear +
15	603 (DG)	Anti–lock brake indicator, control
16	601 (LB/PK)	Voltage supplied in Start and Run (overload protected)
17	–	not used
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	530 (LG/YE)	Chassis Ground
25	37 (YE)	Voltage supplied at all times (overload protected)