C281b

14401

A255
Four–wheel drive
control module

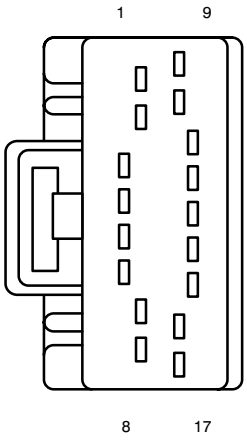

F17005

Pin	Circuit	Circuit Function
1	435 (YE/LB)	signal, return
2	57 (BK)	Ground
	570 (BK/WH)	Ground
3	–	not used
4	762 (YE/WH)	Motor position 1
5	–	not used
6	783 (GY)	Four–wheel drive, indicator, High
7	764 (BN/WH)	Motor position 3
8	–	not used
9	784 (LB/BK)	Four–wheel drive, indicator, Low
10	–	not used
11	–	not used
12	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
13	763 (OG/WH)	Motor position 2
14	–	not used
15	–	not used
16	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
17	–	not used

C282 (GY)

14401

N316
Inertia Fuel Shutoff
(IFS) switch



F03032

Pin	Circuit	Circuit Function
1	921 (GY/OG)	Inertia Fuel Shutoff (IFS) switch, Ground, input
2	787 (PK/BK)	Fuel pump, Power
3	238 (DG/YE)	Fuel pump relay, switched power, output

C284 (GY)

14401

N141
Four–wheel drive
switch



F04027

Pin	Circuit	Circuit Function
1	235 (RD/BK)	Instrument illumination, input
2	465 (WH/LB)	Four–wheel drive control module, to Four–wheel drive switch
3	435 (YE/LB)	signal, return
4	57 (BK)	Ground

C289

14401

M256
Temperature blend
door actuator



F08059

Pin	Circuit	Circuit Function
1	–	not used
2	–	not used
3	437 (YE/LG)	Air temperature door variable resistor, wiper
4	436 (RD/LG)	Air temperature door variable resistor +
5	–	not used
6	438 (RD/WH)	Air temperature door variable resistor –
7	1003 (GY/YE)	Voltage in Run (overload protected)
8	57 (BK)	Ground