W/IVD

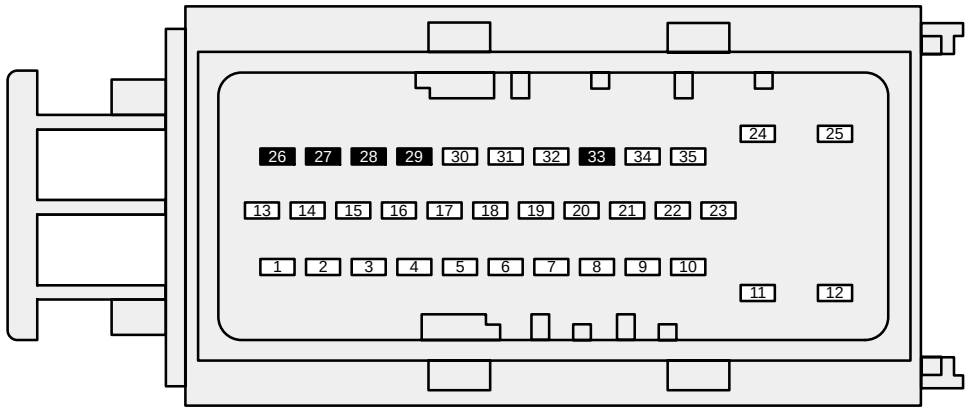

C131

ANTI-LOCK BRAKE CONTROL MODULE

REVISED

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	915 (PK/LB)	SCP Data Bus (–)	19	521 (TN/OG)	LF Wheel Speed HIGH
2	914 (TN/OG)	SCP Data Bus (+)	20	522 (TN/BK)	LF Wheel Speed LOW
3	1574 (DB)	Inertial Sensor 5v Supply	21	518 (LG/RD)	LR Wheel Speed HIGH
4	1576 (TN/BK)	Yaw Rate Signal	22	519 (LG/BK)	LR Wheel Speed LOW
5	535 (LB/RD)	Brake Pressure Switch Signal	23	1040 (RD/BK)	Power (Hot in Run)
6	1577 (RD/LB)	Lateral Acceleration Signal	24	1205 (BK)	Ground
7	514 (YE/RD)	RF Wheel Speed HIGH	25	601 (LB/PK)	Power (Hot at All Times)
8	516 (YE/BK)	RF Wheel Speed LOW	26	–	NOT USED
9	523 (RD/PK)	RR Wheel Speed HIGH	27	–	NOT USED
10	524 (PK/BK)	RR Wheel Speed LOW	28	–	NOT USED
11	1205 (BK)	Ground	29	–	NOT USED
12	534 (YE/LG)	Power (Hot at All Times)	30	1578 (GY/BK)	Inertial Sensor Self Test
13	1583 (BN/WH)	EAS Solenoid Drive (Low Side)	31	1581 (PK/LB)	EAS Release Swtich (Normally Closed)
14	1582 (LG/RD)	EAS Supply (High Side)	32	1590 (LB)	EAS Release Switch Common
15	1580 (WH/LG)	EAS Failsafe Switch (Normally Open)	33	–	NOT USED
16	1573 (YE)	Steering Angle Signal B	34	1575 (BK/WH)	Inertial Sensor Ground
17	1579 (OG/RD)	Ring Frequency (Raster)	35	1571 (BK)	Steering Angle Sensor Ground
18	1572 (DG)	Steering Angle Signal A			