C2009

14401

P78
Integrated control panel

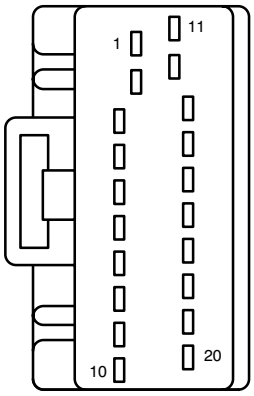

F20019

Pin	Circuit	Circuit Function
1	57 (BK)	Ground
2	1045 (DB/WH)	Illumination dimmer, output
3	–	not used
4	1068 (LG/BK)	Audio System ON (ASYSON)
5	–	not used
6	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
7	59 (DG/VT)	Fused rear window defrost relay, switched power
8	–	not used
9	593 (DB/WH)	Cassette, Right +
10	504 (WH/PK)	Cassette, Left -
11	385 (WH/RD)	Voltage supplied at all times (overload protected)
12	398 (BK/YE)	Ground
13	832 (LB/PK)	Audio corporate protocol A
14	833 (TN)	Audio corporate protocol B
15	723 (GY/RD)	Cellular phone, wake up
16	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
17	1010 (DB/OG)	Rear window defrost switch, input
18	–	not used
19	594 (GY)	Cassette, Right -
20	503 (BN/LG)	Cassette, Left +

C2017

K73
Blower motor relay



F05051

C2021

K1
Rear window defrost relay



F05051

C2027

A17
Electronic flasher module



F03104

C2050

K65
Accessory relay



F05051