C193

12A690 **Before Jan 31**

12B637 **As of Jan 31**

B110
Output shaft speed sensor (OSS)



F02101

Pin	Circuit	Circuit Function
1	136 (DB/YE)	Powertrain Control Module (PCM) - Output shaft speed sensor (OSS)
2	359 (GY/RD)	signal, return

C197a

14A280

M8
Starter motor



F01063

Pin	Circuit	Circuit Function
1	2037 (RD)	Battery cable +

C197b

14A280

M8
Starter motor



F01061

Pin	Circuit	Circuit Function
1	113 (YE/LB)	Starter motor to starter motor relay

C199

12A690 **Before Jan 31**

12B637 **As of Jan 31**

A254
5R55E Transmission

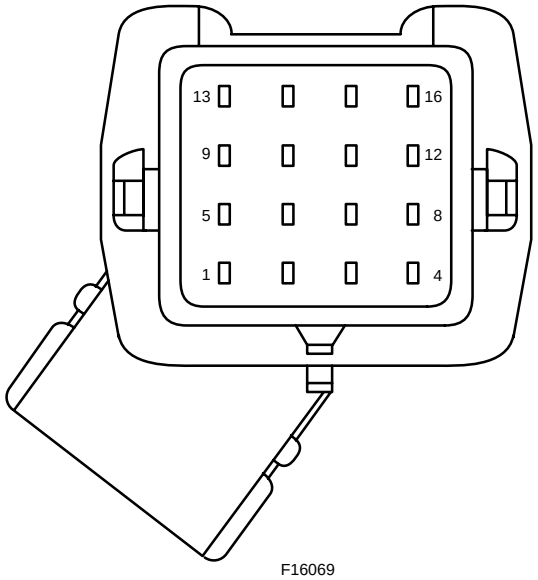

F16069

Pin	Circuit	Circuit Function
1	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
2	970 (DG/WH)	Turbine shaft speed (TSS) sensor
3	359 (GY/RD)	signal, return
4	923 (OG/BK)	Transmission Fluid Temperature (TFT) sensor, input
5	480 (VT/YE)	Torque Converter Clutch (TCC) solenoid
6	–	not used
7	971 (PK/BK)	Shift solenoid C
8	359 (GY/RD)	signal, return
9	924 (BN/OG)	Shift solenoid D
10	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
11	34 (LB/OG)	Voltage supplied in Start and Run (overload protected)
12	925 (WH/YE)	Electronic Pressure Control (EPC) solenoid
13	–	not used
14	315 (VT/OG)	Shift solenoid B
15	–	not used
16	237 (OG/YE)	Shift solenoid A