C248

14A005



F12046

14401



F12045

(1) 193 (YE/LG)
(2) 486 (BN/WH)
(3) 676 (PK/OG)
(4) 186 (BN/LB)
(5) 9 (LG/OG)
(6) 484 (OG/BK)
(7) 84 (VT/YE)
(8) 977 (VT/WH)
(9) 238 (DG/YE)
(10) 29 (YE/WH)
(11) 1083 (LB/BK)
(12) 490 (RD)

C250

14401

N278
Ignition switch
(11572)

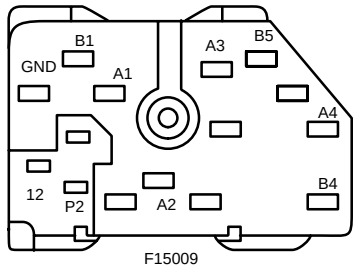

F15009

Pin	Circuit	Circuit function
A1	297 (BKLG)	Voltage in Run or Accessory (overload protected)
A2	489 (PK/BK)	electronic cluster
A3	489 (PK/BK)	electronic cluster
A4	687 (GY/YE)	Voltage in Run (overload protected)
B1	1050 (LG/VT)	Voltage supplied at all times (overload protected)
B2	37 (YE)	Voltage supplied at all times (overload protected)
B3	37 (YE)	Voltage supplied at all times (overload protected)
B4	37 (YE)	Voltage supplied at all times (overload protected)
B5	1050 (LG/VT)	Voltage supplied at all times (overload protected)
I1	1044 (WH/YE)	Voltage supplied in Start and Run (overload protected)
I2	–	not used
P1	–	not used
P2	409 (TN/BK)	Brake pressure switch (2B264)
GND	57 (BK)	Ground
STA	32 (RD/LB)	Voltage supplied in Start (overload protected)

C252

14401

A102
Passive anti–theft
transceiver module
(15607)



F04353

Pin	Circuit	Circuit function
1	676 (PK/OG)	Vehicle Speed Sensor (VSS) –
2	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
3	1216 (GY/OG)	RX, signal
4	1215 (WH/LG)	TX, signal