C1381a

12A581

Powertrain Control Module (PCM) (12A650)

* automatic transmission
** manual transmission

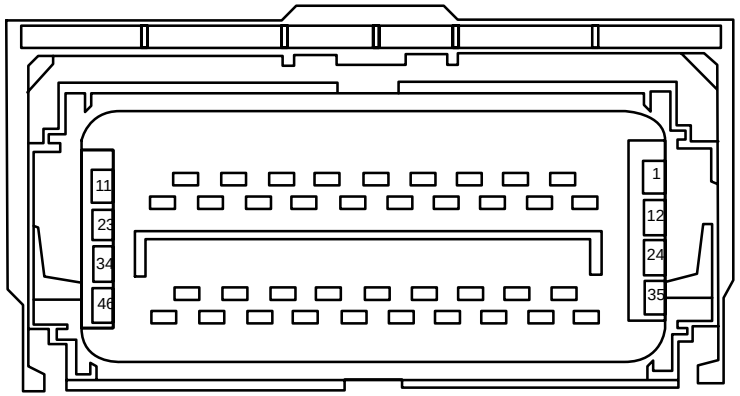

F46001

Pin	Circuit	Circuit function
1	76 (LG/WH)	Tachometer output
2	331 (PK/YE)	A/C clutch relay, control
3	71 (OG/LG)	Data output link
4	262 (BN/PK)	Starter relay circuit, control
5	926 (LB/OG)	Fuel pump relay, control
6	–	not used
7	1857 (YE/WH)	Customer Access, throttle position signal
8	439 (TN/LG)	A/C clutch cycling pressure switch (19D594), input
9	203 (OG/LB)	Speed control indicator, control
10	567 (LB/YE)	Chassis Ground
11	570 (BK/WH)	Power ground
12	322 (LB/YE)	PTO control
13	3072 (PK/YE)	CAN Bus 1H
14	3073 (RD/WH)	CAN Bus 1L
15	643 (RD)	Water–in–fuel sensor, signal
16	440 (TN/LG)	A/C clutch cycling pressure switch (19D594), input
17	162 (LG/RD)	Parking brake switch (15A851), input
18	810 (RD/LG)	Brake pedal position switch (13480), input
19	787 (PK/BK)	Fuel pump, monitor
20	3094 (LB/RD)	Accelerator pedal position sensor, Signal return 2

Pin	Circuit	Circuit function
21	968 (TN/LB)	Mass Air Flow (MAF) sensor (12B579), Signal return
22	239 (WH/OG)	Customer Access, vehicle speed signal, output
23	570 (BK/WH)	Power ground
24	133 (BK)	Signal return, speed control
25	3076 (YE/WH)	Accelerator pedal position sensor, monitor 3
26	3091 (LB/BK)	Accelerator pedal position sensor, monitor 1
27	–	not used
28	307 (BK/YE)	Brake pressure switch (2B264), input
29	3093 (WH/LB)	Accelerator pedal position sensor, Reference voltage 2
30	3090 (VT)	Generator/Battery indicator, control
31	151 (LB/BK)	Speed control switch, input
32	914 (TN/OG)	Standard Corporate Protocol (SCP) data +
33	359 (GY/RD)	Signal return
34	361 (RD)	Voltage supplied in Start and Run (overload protected)
35	679 (GY/BK)	vehicle speed signal, input
36	*224 (TN/WH)	Grade/Load switch, input
36	**306 (TN/LB)	Clutch pedal position switch, input
37	3075 (YE)	Accelerator pedal position sensor, monitor 2
38	356 (DB/LG)	Barometric Absolute Pressure (BAP) sensor, monitor

Pin	Circuit	Circuit function
39	107 (VT)	Module programming signal
40	729 (RD/WH)	Voltage supplied at all times (overload protected)
41	358 (LG/BK)	Manifold Absolute Pressure (MAP) sensor, monitor
42	967 (LB/RD)	Mass Air Flow (MAF) sensor (12B579), output
43	743 (GY)	Intake air temperature sensor, signal
44	915 (PK/LB)	Standard Corporate Protocol (SCP) data –
45	351(BN/WH)	Reference voltage
46	361 (RD)	Voltage supplied in Start and Run (overload protected)