C951 (BK)

14334

Function selector switch assembly, rear



F06239

Pin	Circuit	Circuit function
1	1126 (LB)	Signal return
2	1349 (PK/LG)	signal, speed control, Blower motor
3	1348 (GY/OG)	Reference voltage
4	465 (WH/LB)	signal, Temperature
5	1205 (BK)	Ground, Illumination
6	1418 (LB/WH)	Illumination, feed

C953

14A005

Radio control, rear (19A164)

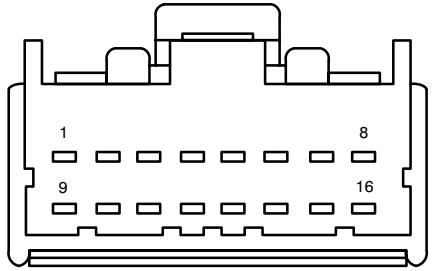

F16119

Pin	Circuit	Circuit function
1	825 (TN/LG)	Speaker, right rear (18808) +
2	802 (OG/RD)	Speaker, right rear (18808) +
3	803 (BN/PK)	Speaker, right rear (18808) –
4	–	not used
5	801 (TN/YE)	Speaker, left rear (18808) –
6	800 (GY/LB)	Speaker, left rear (18808) +
7	827 (TN/WH)	Speaker, left rear (18808) +
8	–	not used
9	1068 (LG/BK)	Audio System ON (ASYSON)
10	797 (LG/VT)	Voltage supplied at all times (overload protected)
11	694 (BK/LG)	Ground
12	832 (LB/PK)	Audio corporate protocol A
13	833 (TN)	Audio corporate protocol B
14	–	not used
15	1205 (BK)	Ground
16	1417 (LG/RD)	Light emitting diode (LED), Illumination