C135 (BK)

14290

ABS control module
(2C219)

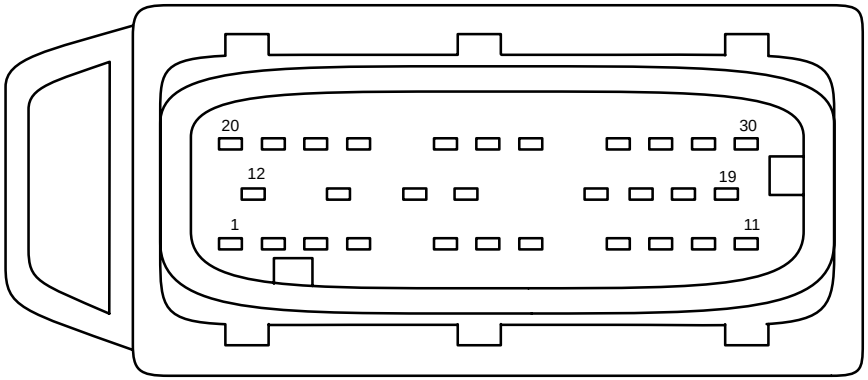

F30003

Pin	Circuit	Circuit function
1	494 (TN/LG)	Wheel speed sensor, right rear –
2	–	not used
3	492 (BN)	Wheel speed sensor, right rear +
4	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
5	516 (YE/BK)	Wheel speed sensor, right front (2C204) –
6	511 (LG)	Hot with BPP switch engaged
7	–	not used
8	601 (LB/PK)	Voltage in Run (overload protected)
9	–	not used
10	–	not used
11	–	not used
12	1205 (BK)	Ground
13	534 (YE/LG)	Voltage supplied at all times (overload protected)
14	532 (OG/YE)	Voltage supplied at all times (overload protected)
15	397 (BK/WH)	Ground

Pin	Circuit	Circuit function
16	603 (DG)	Anti–lock brake indicator, control
17	–	not used
18	–	not used
19	–	not used
20	521 (TN/OG)	Wheel speed sensor, left front (2C205) +
21	522 (TN/BK)	Wheel speed sensor, left front (2C205) –
22	496 (OG)	Wheel speed sensor, left rear –
23	499 (GY/BK)	Wheel speed sensor, left rear +
24	70 (LB/WH)	ISO Bus
25	–	not used
26	–	not used
27	–	not used
28	–	not used
29	915 (PK/LB)	SCP Bus –
30	914 (TN/OG)	SCP Bus +