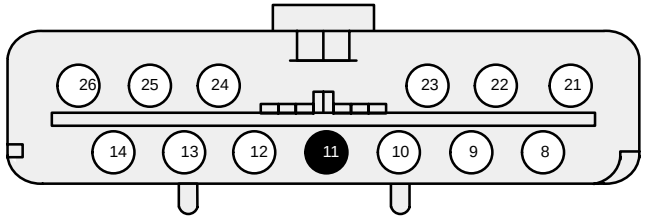

C227 (BLACK)

ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
8	1070 (BN/LB)	EATC to Steering Wheel Controls
9	438 (RD/WH)	Potentiometer Return
10	269 (LB/OG)	Blower Feedback
11	–	NOT USED
12	1069 (OG/LB)	Recirculating Door Actuator Motor
13	245 (BN/LG)	Blend Door Actuator Motor Drive
14	484 (OG/BK)	Illumination Input
21	790 (WH/OG)	In-Car Temperature Sensor Reference
22	688 (GY/LB)	EATC to Rear Window Defrost Relay Output
23	752 (YE/RD)	Blower Speed Output
24	754 (LG/WH)	High Relay
25	660 (YE/LG)	Recirculating Door Actuator Motor
26	246 (VT)	Blend Door Actuator Motor Drive

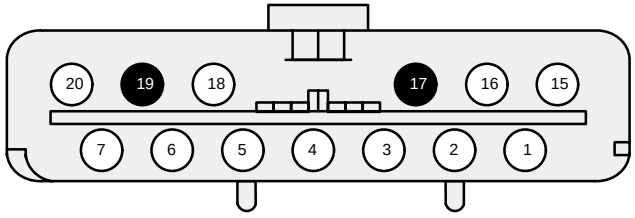

C281 (WHITE)

ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	915 (PK/LB)	Multiplex Communication Network Data (–)
2	729 (RD/WH)	Power (Hot at All Times)
3	57 (BK)	Ground
4	470 (PK/LB)	Sensor Ground
5	435 (YE/LB)	Recirculating Door Actuator Potentiometer
6	436 (RD/LG)	Potentiometer Feed
7	767 (LB/OG)	Ambient Temperature Sensor Input
15	914 (TN/OG)	Multiplex Communication Network Data (+)
16	1040 (RD/BK)	Power (Hot in Run)
17	–	NOT USED
18	437 (YE/LG)	Blend Door Actuator Potentiometer
19	–	NOT USED
20	468 (BN)	Sunload Sensor Input