C274a

14401

A262
Central security
module

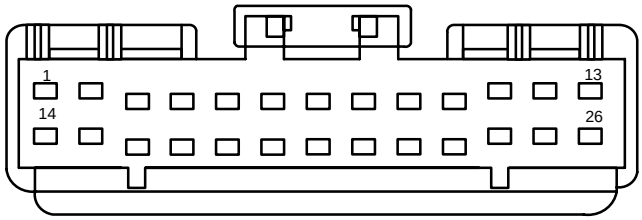

F26014

Pin	Circuit	Circuit Function
1	163 (RD/OG)	Driver door unlock relay, switched power
2	–	not used
3	70 (LB/WH)	ISO Bus
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	6 (YE/LG)	Horn relay, switched power, output
11	999 (LB/WH)	GEM/TCSM Illumination, signal
12	–	not used
13	1 (DB)	Horn relay, control
14	57 (BK)	Ground
15	–	not used
16	–	not used
17	–	not used
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	645 (WH/LB)	Voltage supplied at all times (overload protected)
25	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
26	–	not used

C274b

14401

A262
Central security
module

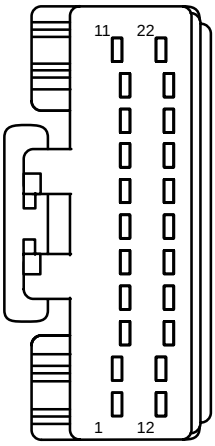

F22017

Pin	Circuit	Circuit Function
1	195 (TN/WH)	Voltage supplied at all times (overload protected)
2	14 (BN)	Power, Exterior lamps
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used
9	120 (PK/LG)	Door unlock, control
10	1013 (BN/LG)	GEM/Central security module illumination, signal
11	118 (PK/OG)	Door unlock, output
12	645 (WH/LB)	Voltage supplied at all times (overload protected)
13	570 (BK/WH)	Ground
14	–	not used
15	–	not used
16	–	not used
17	119 (PK/YE)	Door lock, output
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	117 (PK/BK)	Door lock, output