* DIGITAL CLUSTER

REVISED

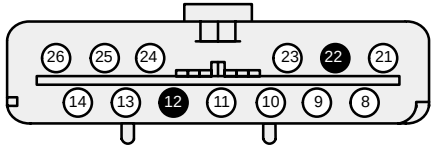

C228 (BLACK)

ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
8	1070 (BN/LB)	EATC Redundant Control
9	438 (RD/WH)	Blend Door Potentiometer Ground
10	269 (LB/OG)	Blower Motor Speed Controller Feedback
11	348 (VT)	A/C Cycling Clutch Output
12	–	NOT USED
13	245 (BN/LG)	Blend Door Actuator Motor Drive (Heat)
14	484 (OG/BK)	Front Panel Illumination
21	790 (WH/OG)	In-Car Temperature Sensor Output
22	–	NOT USED
23	752 (YE/RD)	Blower Motor Speed Controller Output
24	754 (LG/WH)	Relay Signal
*25	506 (RD)	English/Metric Converter
26	246 (VT)	Blend Door Actuator Motor Drive (Cool)

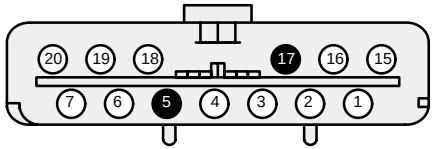

C227 (WHITE)

ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	915 (PK/LB)	SCP Data Bus (–)
2	54 (LG/YE)	Battery (B+)
3	57 (BK)	Ground
4	470 (PK/BK)	Ambient, Sunload & In-Car Temperature Ground
5	–	NOT USED
6	436 (RD/LG)	Blend Door Potentiometer Reference Voltage
7	767 (LB/OG)	Ambient Temperature Sensor Input
15	914 (TN/OG)	SCP Data Bus (+)
16	298 (VT/OG)	Power (Hot in Run)
17	–	NOT USED
18	437 (YE/LG)	Blend Door Potentiometer Feedback
19	19 (LB/RD)	Instrument Illumination
20	468 (BN)	Sunload Sensor Input