C199

12A522

A40
Transmission hard-
ware unit



F10055

Pin	Circuit	Circuit function
1	100 (WH/RD)	PCM power relay, output
2	89 (OG)	signal, return
3	923 (OG/BK)	Transmission Fluid Temperature (TFT) sensor, input
4	237 (OG/YE)	Shift solenoid A
5	100 (WH/RD)	PCM power relay, output
6	315 (VT/OG)	Shift solenoid B
7	480 (VT/YE)	Torque Converter Clutch (TCC) solenoid
8	925 (WH/YE)	Electronic Pressure Control (EPC) solenoid
9	100 (WH/RD)	PCM power relay, output
10	971 (PK/BK)	3–2T/CCS, signal

C201a

14401

A112
Generic Electronic
Module (GEM)
(14B205)

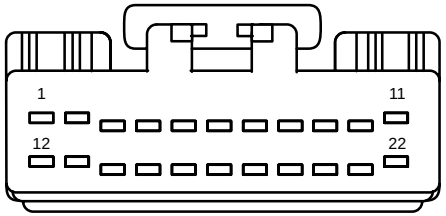

F22017

Pin	Circuit	Circuit function
1	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
2	570 (BK/WH)	Ground
3	1402 (RD/WH)	Headlamps, On, signal, to, Generic Electronic Module (GEM) (14B205)
4	1401 (BK/LG)	Parking Lamps, On, signal, to, Generic Electronic Mod-ule (GEM) (14B205)
5	–	not used
6	158 (BK/PK)	Key warning switch (11A127), input
7	15 (RD/YE)	Headlamp relay, control
8	–	not used
9	385 (WH/RD)	Electronic flasher module
10	930 (VT/LG)	Door ajar indicator, control
11	70 (LB/WH)	ISO Bus
12	956 (OG/LG)	Voltage supplied at all times (overload protected)
13	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
14	410 (WH/OG)	Rear window wiper/washer switch, input
15	485 (PK/BK)	Rear window wiper/washer switch, input
16	1304 (VT/OG)	Anti–theft hood switch (19A434), signal
17	1004 (LB/RD)	Accessory delay relay, control
18	218 (WH/VT)	Park lamp relay, control
19	6 (YE/LG)	Horn relay, control
20	1359 (DG/VT)	Rear wiper relay, control
21	–	not used
22	–	not used