C226

14401

B36
Steering position
sensor (18B015)



F04153

Pin	Circuit	Circuit function
1	1003 (GY/YE)	Voltage in Run (overload protected)
2	633 (RD)	Steering position sensor (18B015), to, Air suspension module (3C142), Terminal (+) A
3	634 (BN)	Steering position sensor (18B015), to, Air suspension module (3C142), Terminal (+) B
4	875 (BK/LB)	Ground

C228a

14401

A205
Electronic Automatic
Temperature Control
(EATC) module
(19980)

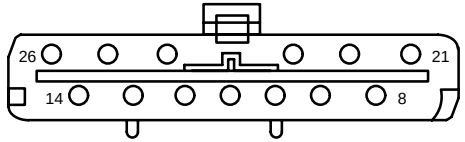

F13002

Pin	Circuit	Circuit function
8	1070 (BN/LB)	Steering wheel control
9	247 (WH/YE)	Blend door actuator, Sensor, return
10	–	not used
11	348 (VT)	A/C demand signal
12	–	not used
13	250 (OG)	Power, Blend door actuator
14	19 (LB/RD)	Voltage supplied at all times (overload protected)
21	790 (WH/OG)	In–vehicle temperature sensor (19C734), input
22	575 (YE/BK)	Blower motor relay, control
23	184 (TN/OG)	Blower motor speed controller, signal
24	–	not used
25	–	not used
26	249 (DB/LG)	Power, Blend door actuator