C228a

14401

Electronic Automatic Temperature Control (EATC) module (19980)

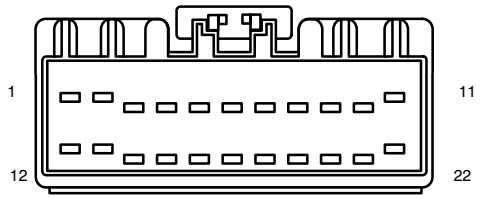

F22037

Pin	Circuit	Circuit function
1	5-FA10 (BU/YE)	Standard Corporate Protocol (SCP) data –
2	31-FA10 (BK)	Ground
3	20-FA10 (PK/OG)	Voltage in Run (overload protected)
4	–	not used
5	9-FA45 (BN/BU)	not used
6	8-FA51 (WH/BK)	Discharge temperature sensor, right, signal
7	8-FA53 (WH/BU)	Sunload sensor (19E663), signal
8	9-FA49 (BN/WH)	Ambient air temperature sensor (19E702), Signal return
9	8-FA48 (WH/GN)	In–vehicle temperature sensor (19C734), signal
10	8-FA44 (WH/RD)	Evaporator discharge air temperature sensor (19C734), signal
11	9-FA1 (BN/RD)	Signal return

Pin	Circuit	Circuit function
12	4-FA10 (GY/BK)	Standard Corporate Protocol (SCP) data +
13	4-FA1 (GY/RD)	UBP Bus
14	29-FA10 (OG/GN)	Voltage supplied at all times (overload protected)
15	8-FA45 (WH/BU)	Blower motor, control, signal
16	9-FA44 (BN/RD)	Evaporator discharge air temperature sensor (19C734), Signal return
17	8-FA49 (WH/VT)	Ambient air temperature sensor (19E702), signal
18	8-FA47 (WH/GN)	Discharge temperature sensor, left, signal
19	9-FA3 (BN/RD)	Temperature, Sensor, Signal return
20	10-FA53 (GY/VT)	Sunload sensor (19E663), signal
21	–	not used
22	7-FA1 (YE/RD)	Reference voltage