C201c (GY)

14401

Generic Electronic Module (GEM) (14B205)

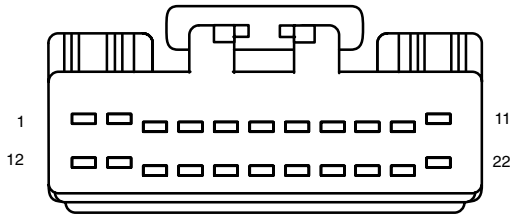

F22017

Pin	Circuit	Circuit function
1	–	not used
2	145 (GY/BK)	4x2 center axle disconnect solenoid, control
3	783 (GY)	Four–wheel drive, indicator, high/low, input
4	–	not used
5	–	not used
6	–	not used
7	605 (RD)	4x4 center axle disconnect solenoid, control
8	780 (DB)	Four–wheel drive switch, Reference voltage
9	210 (LB)	Four–wheel drive, High, indicator, control
10	–	not used
11	–	not used
12	762 (YE/WH)	Motor position, Signal return
13	810 (RD/LG)	Brake pedal position switch (13480), output
14	976 (OG)	Transfer case electric clutch relay, control
15	–	not used
16	782 (BN/WH)	Transfer case relay module, control – L2H
17	781 (OG/LB)	Transfer case relay module, control – H2L
18	763 (OG/WH)	Transfer case assembly, Motor position 1
19	764 (BN/WH)	Transfer case assembly, Motor position 2
20	770 (WH)	Transfer case assembly, Motor position 3
21	771 (VT/YE)	Transfer case assembly, Motor position 4
22	463 (RD/WH)	Neutral, switch sense, input

C201d

Generic Electronic Module (GEM) (14B205)

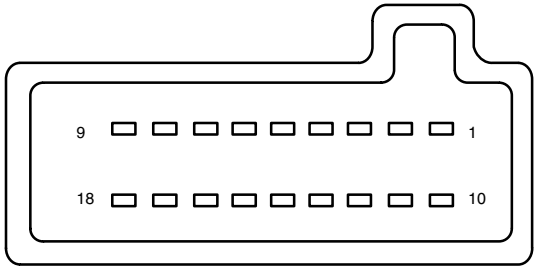

F18019

Pin	Circuit	Circuit function
1	–	Battery saver relay, control
2	–	switch, Ground
3	–	Voltage in Run (overload protected)
4	–	Voltage supplied at all times (overload protected)
5	–	Voltage supplied in Start (overload protected)
6	–	not used
7	–	switched power
8	–	Master window adjust switch (14529), feed, Down
9	–	One–Touch Down Switch, signal
10	–	not used
11	–	Accessory delay relay, control
12	–	not used
13	–	Voltage in Run or Accessory (overload protected)
14	–	not used
15	–	Interior lamp relay, control
16	–	Voltage supplied at all times (overload protected)
17	–	Accessory delay relay, output
18	–	vehicle speed signal