58-5 LIGHTING CONTROL MODULE (LCM)

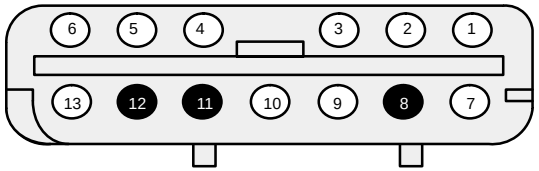

C222

LIGHTING CONTROL MODULE (LCM)

PIN	CIRCUIT	CIRCUIT FUNCTION
1	932 (GY/WH)	High-Beam Output
2	905 (GY/LB)	Power (Hot at All Times)
3	484 (OG/BK)	Instrument Illumination Output
4	705 (LG/OG)	Demand Lighting
5	1056 (DB/LG)	Power (Hot at All Times)
6	161 (DG/OG)	Right Low Beam Output
7	910 (PK)	Power (Hot at All Times)
8	–	NOT USED
9	54 (LG/YE)	Power (Hot at All Times)
10	53 (BK/LB)	Courtesy Lamps
11	–	NOT USED
12	–	NOT USED
13	676 (PK/OG)	Ground

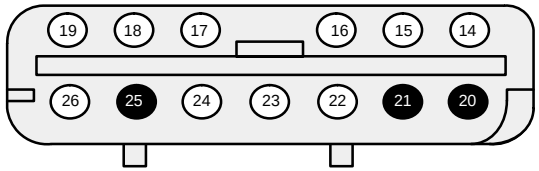

C200

LIGHTING CONTROL MODULE (LCM)

PIN	CIRCUIT	CIRCUIT FUNCTION
14	1055 (WH/LG)	Power (Hot at All Times)
15	160 (DB/WH)	Left Low Beam
16	195 (TN/WH)	Power (Hot at All Times)
17	44 (LB)	Flasher Output
18	44 (LB)	Flasher Output
19	12 (LG/BK)	High-Beam Switch
20	–	NOT USED
21	–	NOT USED
22	14 (BN)	Park Lamps
23	385 (WH/RD)	Flasher Power
24	385 (WH/RD)	Flasher Power
25	–	NOT USED
26	28 (BK/PK)	Windshield Wiper Input