C2113c (BU)

14A005

Vehicle Security Module (VSM) (15K602)

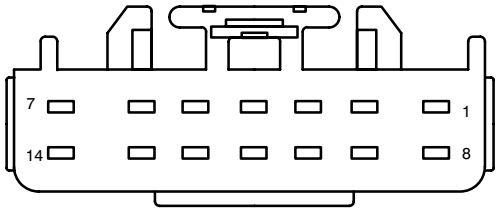

F14049

Pin	Circuit	Circuit function
1	–	not used
2	78 (LB/YE)	Key pad, output A
3	121 (YE/BK)	Key pad, output C
4	124 (BN)	Key pad common
5	1906 (VT)	UBP Bus
6	66 (LB)	Key pad, Power
7	1350 (WH/PK)	Liftgate glass actuator, feed
8	1951 (TN)	Third row folding seat relay, control
9	79 (LG/RD)	Key pad, output B
10	–	not used
11	1760 (WH/VT)	Liftgate glass release switch, signal
12	–	not used
13	–	not used
14	–	not used

C2131a (GY)

12A581

Air suspension module (3C142)

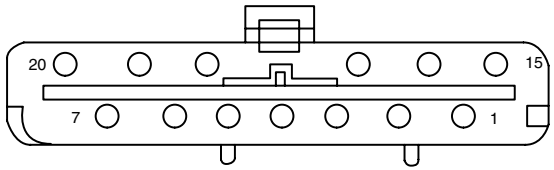

F20051

Pin	Circuit	Circuit function
1	1524 (DB)	Voltage supplied at all times (overload protected)
2	414 (OG/RD)	Shock absorber solenoid valve, right front, control
3	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
4	1003 (GY/YE)	Voltage supplied in Start and Run (overload protected)
5	421 (PK)	Air suspension compressor assembly, Vent solenoid to Air suspension module (3C142)
6	424 (TN)	Height sensor, right front, signal
7	422 (PK/BK)	Height sensor, left front, signal
15	1524 (DB)	Voltage supplied at all times (overload protected)
16	415 (LG/OG)	Shock absorber solenoid valve, left front, control
17	426 (RD/BK)	Sensor, Power
18	420 (DB/Y)	Air suspension solid state relay (2C013), control
19	875 (BK/LB)	Ground
20	432 (BK/PK)	Sensor, return