## C175b (GY)

### 7C078

Powertrain Control Module (PCM) (12A650)

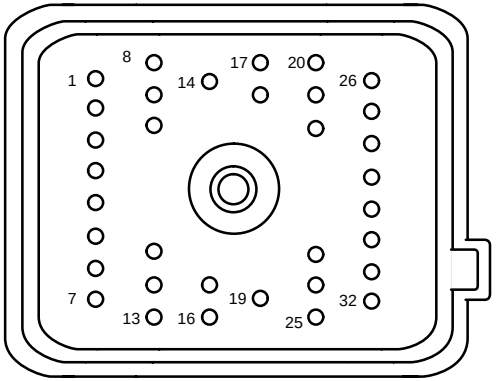


F32001

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 237 (OG/YE) | Shift solenoid A, control |
| 2 | 315 (VT/OG) | Shift solenoid B, control |
| 3 | 971 (PK/BK) | Shift solenoid C, control |
| 4 | 924 (BN/OG) | Shift solenoid D, control |
| 5 | 480 (VT/YE) | Torque Converter Clutch (TCC) solenoid, control |
| 6 | – | not used |
| 7 | 925 (WH/YE) | Electronic Pressure Control (EPC) solenoid |
| 8 | – | not used |
| 9 | 199 (LB/YE) | Digital Transmission Range (DTR) sensor, TR3A |
| 10 | 1143 (WH/BK) | Digital Transmission Range (DTR) sensor, TR4 |
| 11 | – | not used |
| 12 | 770 (WH) | Pressure Control (PCC) solenoid C, control |
| 13 | 966 (LB/PK) | Pressure Control (PCB) solenoid B, control |
| 14 | – | not used |
| 15 | 389 (WH/BK) | Heated Oxygen Sensor (HO2S) #12 (9G444), heater |
| 16 | 390 (TN/YE) | Heated Oxygen Sensor (HO2S) #22 (9G444), heater |

| Pin | Circuit | Circuit function |
|---|---|---|
| 17 | 359 (GY/RD) | signal, return |
| 18 | 1145 (LB/BK) | Digital Transmission Range (DTR) sensor, TR2 |
| 19 | – | not used |
| 20 | – | not used |
| 21 | 324 (YE/LG) | Intermediate Shaft Speed (ISS) sensor (7H103), signal |
| 22 | 1144 (YE/BK) | Digital Transmission Range (DTR) sensor, TR1 |
| 23 | 923 (OG/BK) | Transmission Fluid Temperature (TFT) sensor, input |
| 24 | – | not used |
| 25 | – | not used |
| 26 | 136 (DB/YE) | Output Shaft Speed (OSS) sensor (7H103), signal |
| 27 | 970 (DG/WH) | Turbine shaft speed sensor (7H103), signal |
| 28 | 392 (RD/LG) | Heated Oxygen Sensor (HO2S) #12 (9G444), input |
| 29 | 393 (VT/LG) | Heated Oxygen Sensor (HO2S) #22 (9G444), input |
| 30 | – | not used |
| 31 | – | not used |
| 32 | – | not used |