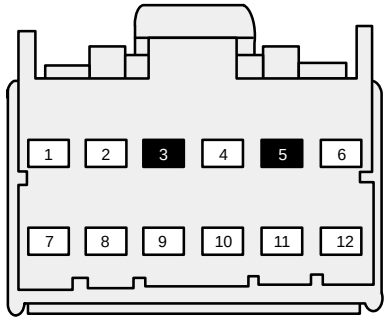

C2005

CD CHANGER

PIN	CIRCUIT	CIRCUIT FUNCTION
1	690 (GY)	Right Channel Signal R+
2	856 (VT)	Left Channel Signal L+
3	–	NOT USED
4	694 (BK/LG)	Ground
5	–	NOT USED
6	832 (LB/PK)	Audio Corporate Protocol A
7	799 (OG/BK)	Right Channel Signal R–
8	798 (LG/RD)	Left Channel Signal L–
9	57 (BK)	Ground (Shield)
10	797 (LG/VT)	Power (Hot at All Times)
11	1068 (LG/BK)	ASYS On
12	833 (TN)	Audio Corporate Protocol B

AUDIO

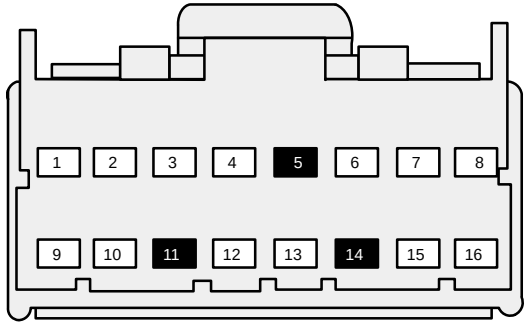

C2003

REAR INTEGRATED CONTROL PANEL (RICP)

PIN	CIRCUIT	CIRCUIT FUNCTION
1	801 (TN/YE)	LR Speaker Signal (+)
2	800 (GY/LB)	LR Speaker Signal (–)
3	803 (BN/PK)	RR Speaker Signal (+)
4	802 (OG/RD)	RR Speaker Signal (–)
5	–	NOT USED
6	694 (BK/LG)	Ground
7	57 (BK)	Ground
8	235 (RD/BK)	Instrument Dimming
9	825 (TN/LG)	RR Speaker Signal (–)
10	827 (TN/WH)	LR Speaker Signal (–)
11	–	NOT USED
12	832 (LB/PK)	Audio Corporate Protocol A
13	833 (TN)	Audio Corporate Protocol B
14	–	NOT USED
15	1068 (LG/BK)	ASYS On
16	797 (LG/VT)	Power (Hot at All Times)