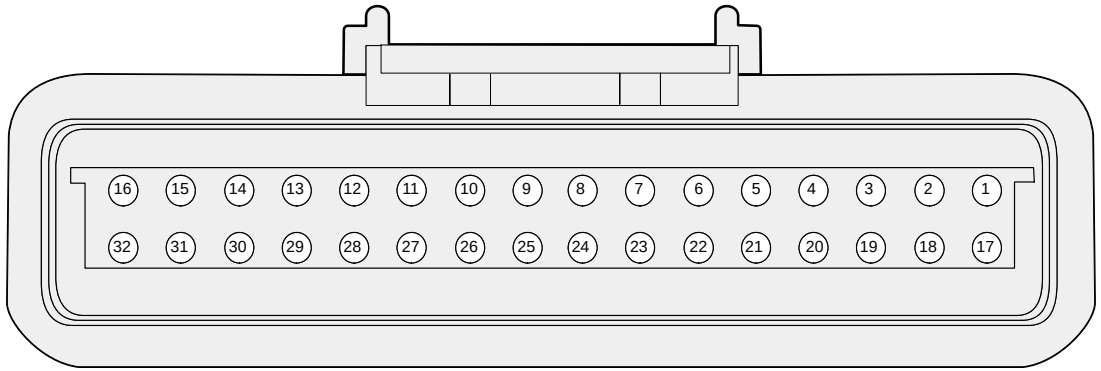

C340

ALLISON 2000/2400 CONTROL UNIT

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	101 (GY/YE)	Ground	17	48	Terminates in Harness
2	102 (WH)	Power (Hot in Start or Run)	18	48	Terminates in Harness
3	103 (WH/RD)	Power (Hot at All Times)	19	119 (PK/YE)	Exhaust Brake Enable
4	104 (LB/OG)	Power (Hot in Start or Run)	20	120 (PK/LG)	Exhaust Brake Enable
5	105 (RD/WH)	Ground	21	121 (YE/BK)	Exhaust Brake Enable
6	106 (LB)	Exhaust Brake Enable	22	122 (YE)	Exhaust Brake Enable
7	107 (VT)	Exhaust Brake Enable	23	123 (RD)	“RANGE INHBT” Indicator
8	108 (BN/LB)	Exhaust Brake Enable	24	48	Terminates in Harness
9	48	Terminates in Harness	25	125 (DB/WH)	“DO NOT SHIFT” Indicator
10	110 (WH/LG)	Exhaust Brake Enable	26	126 (VT/YE)	Generic Electronic Module (GEM)
11	111 (BK/OG)	Exhaust Brake Enable	27	48	Terminates in Harness
12	48	Terminates in Harness	28	128 (DB/YE)	Exhaust Brake Enable
13	113 (YE/LB)	Anti-Lock Brake Control Module	29	129 (LG)	Diagnostic Communications
14	48	Terminates in Harness	30	48	Terminates in Harness
15	48	Terminates in Harness	31	131 (VT/OG)	Diagnostic Communications
16	48	Terminates in Harness	32	132 (OG/BK)	Diagnostic Communications